

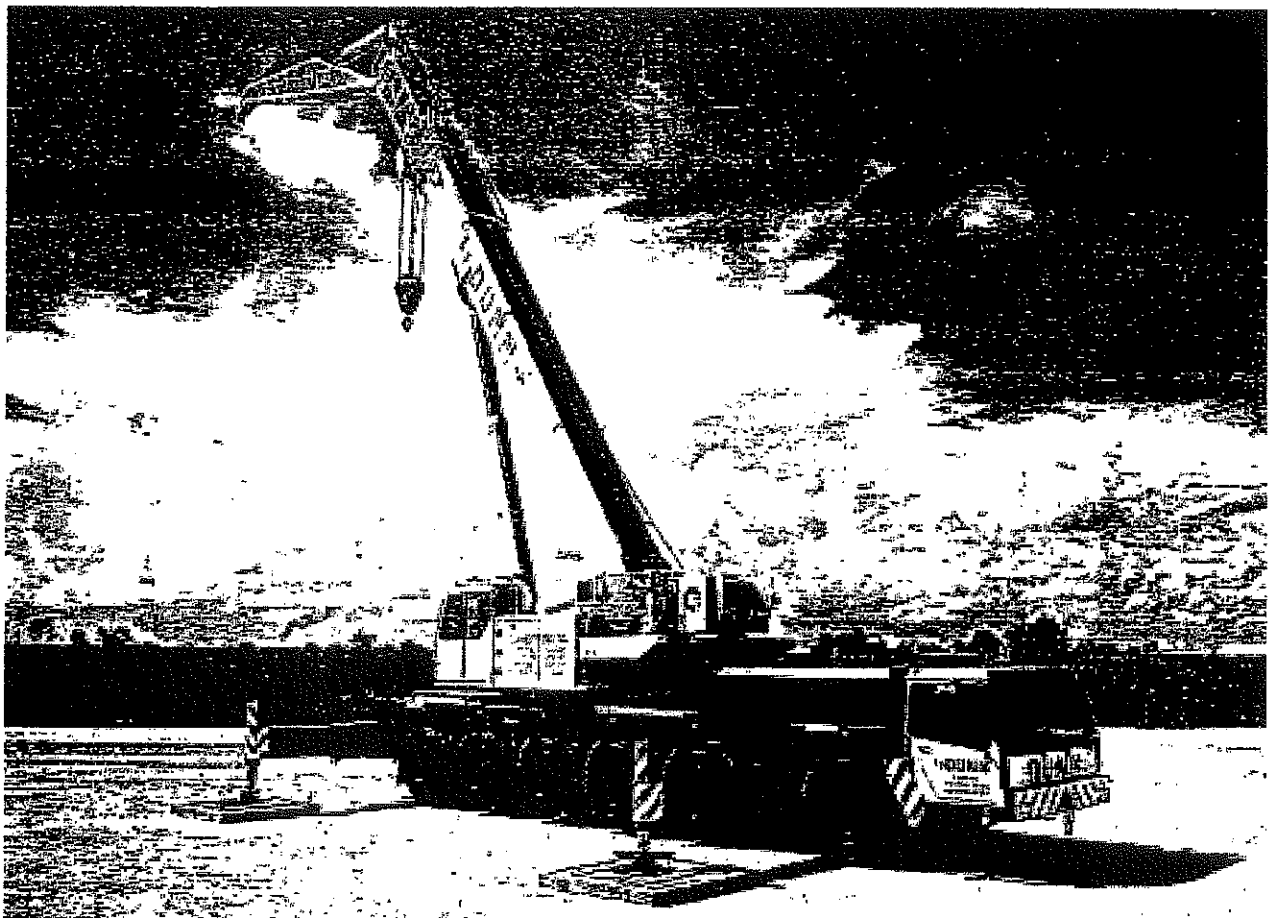


Telescopic Truck Crane

LTM 1160/1

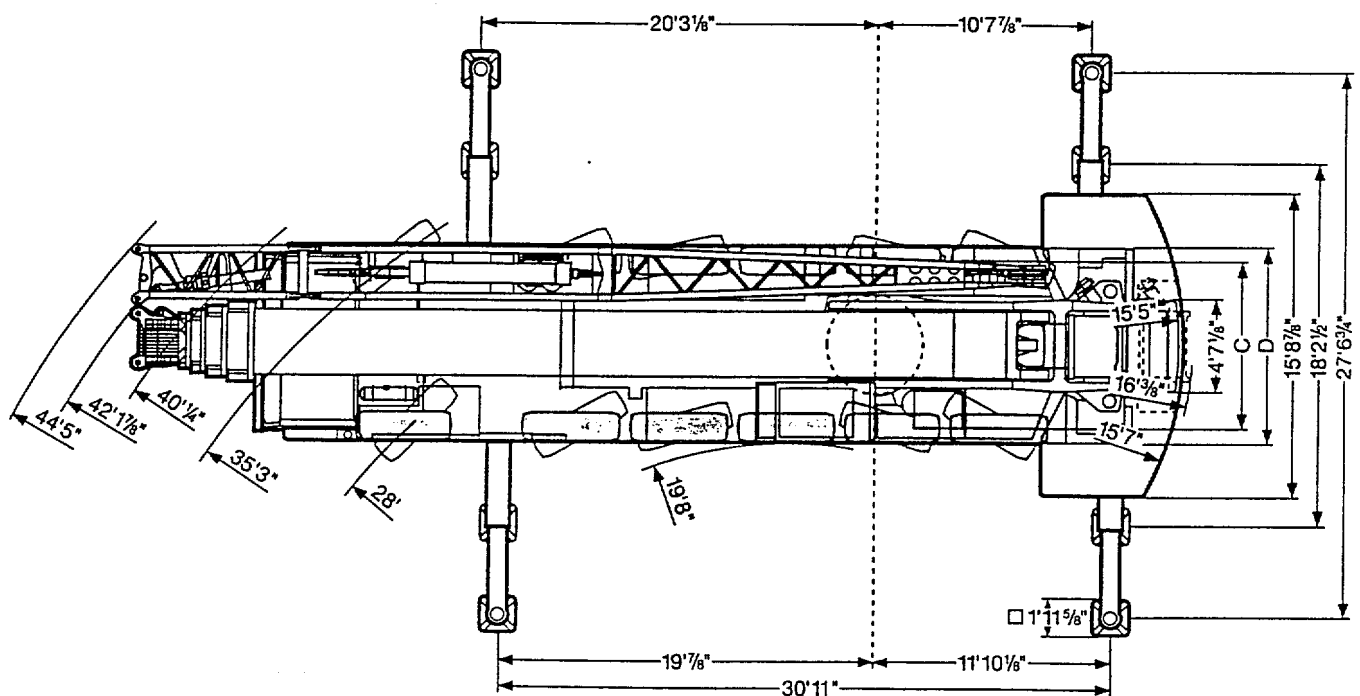

Dimensions.

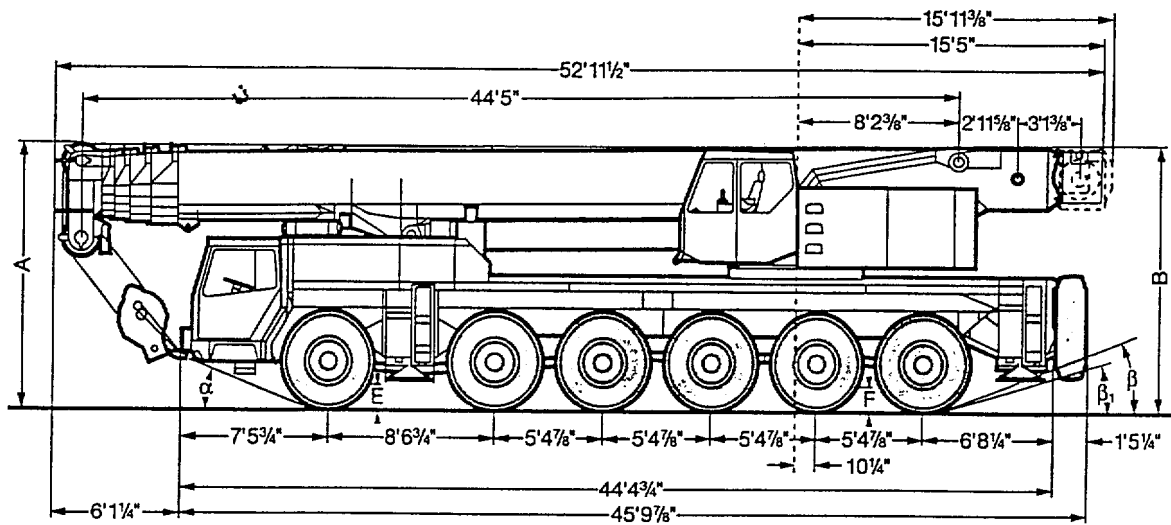

	Dimensions									
	A	A 5'¼"	B	C	D	E	F	α	β	β ₁
20.5 R 25	12'11½"	12'5¼"	12'10½"	8'7¾"	10'5"	14¾"	18½"	21°	19.5°	15°

* lowered

Weights.



Axle	1	2	3	4	5	6	Total weight
lbs	26500	26500	26500	26500	26500	26500	159000*

* with 6600 lbs counterweight and folding jib



Load (kips)	No. of sheaves	No. of lines	Weight lbs
331	9	17	5291
302	7	15	3241
221	5	10	2756
150	3	7	1984
66	1	3	1676
22	-	1	860

Working speeds.



	1	2	3	4	5	R	
mph	9.6	15.4	23.7	35.2	48.7	9	-
mph	5.1	9	14	20.5	28.2	4.8	40%
	20.5 R 25						



Drive	infinitely variable	Rope diameter / Rope length	Max. single line pull
	0 - 427 ft/min single line	1 1/8" / 984'3"	22 295 lbs
	0 - 394 ft/min single line	1 1/8" / 656'2"	22 295 lbs
	0 - 1.6 rpm		
	approx. 70 seconds to reach 83° boom angle		
	approx. 120 seconds (300 seconds) for boom extension from 44 ft - 102 ft (44 ft - 171 ft)		

Lifting capacities at telescopic boom.

MAXIM
Crane Works, L.R.
1-877-MAX-LIFT

maximcrane.com



44 ft – 171 ft



360°



101 500 lbs

85%

ft	44 ft	59 ft	73 ft	88 ft	102 ft	117 ft	132 ft	146 ft	160 ft	171 ft	ft
10	381	346									10
11	349	328									11
12	325	311	295								12
13	307	294	280								13
14	291	280	268	238	194	158					14
15	276	267	257	233	194	158	168				15
16	263	255	250	226	194	158	167				16
17	250	243	241	221	192	156	164	136			17
18	237	232	230	216	190	152	160	134			18
20		211	210	204	184	145	152	130	108	77.5	20
22		192	190	188	175	138	146	125	105	77.5	22
24		175	174	173	167	131	141	120	102	77.5	24
26		160	159	158	159	124	134	115	99	77.5	26
28		149	147	146	147	118	129	110	95.5	75	28
30		138	136	135	136	113	123	106	91.5	72.5	30
32		128	127	126	127	108	118	101	88	70	32
34			118	117	119	104	112	97.5	85	67.5	34
36			111	110	111	99.5	106	94	82	65	36
38			103	102	103	95.5	100	90	79	63	38
40			96	95	96.5	92	94.5	86.5	78	61	40
45			83	81.5	82.5	84	80.5	79	70	56	45
50				71	71.5	75.5	69.5	69.5	64.5	51.7	50
55				62	62	67	60.5	60.5	59.1	47.8	55
60					54.2	59.3	53.1	53.4	53.4	44.3	60
65					47.8	52.2	47	47.5	47.5	41.2	65
70					41.9	46.4	42	42.5	42.7	38.4	70
75						34	38.3	37.4	38.2	38.4	75
80								33.2	34.4	34.7	80
85								29.6	31	31.4	85
90								27.8	27.8	28.6	90
95									24.8	28	95
100									22.2	23.4	100
105										21.1	105
110										19	110
115										17.1	115
120											120
125											125
130											130
135											135
140											140
145											145
150											150
155											155
I	0	46	92	92	0	92/0	92	92	0	92	I
II	0	0	0	46	92	92/0	92	92	92	92	II
III	0	0	0	0	46	0/92	46	92	92	92	III
% IV	0	0	0	0	0	0/92	0	0	92	46	% IV

" over rear

TAB 89044 / 89045

Remarks referring to load charts.

- The tabulated lifting capacities do not exceed 85 % of the tipping load.
- The crane's structural steelwork is in accordance with DIN 15018, part 3. Design and construction of the crane comply with DIN 15018, part 2, and with F. E. M. regulations.
- The 85 % overturning limit values take into account wind force 5 = wind speed 20 mph.
- Lifting capacities are given in kips.
- The weight of the hook blocks and hooks must be deducted from the lifting capacities.
- Working radii are measured from the slewing centreline.
- The lifting capacities given for the telescopic boom only apply if the folding jib is taken off.
- Lifting capacities are subject to modifications.
- Lifting capacities above 309 kips only with additional pulley block and special equipment.

Lifting capacities are given



44 ft - 171 ft



360°



78 300 lbs

ft	44 ft		59 ft	73 ft		88 ft		102 ft		117 ft	132 ft		146 ft	160 ft	171 ft	ft
10	312	282														10
11	295	282														11
12	279	276	268													12
13		264	254													13
14		251	243	216	89.5	176	143									14
15		239	233	211	86	176	143	153	88							15
16		228	225	206	82.5	176	143	152	88							16
17		217	215	200	79.5	175	141	149	88	124						17
18		206	204	194	76.5	172	138	145	87	122						18
20		184	182	181	71.5	167	132	138	85	119	98	70.5				20
22		167	165	165	67	159	125	133	81	114	95.5	70.5				22
24		152	151	150	62.5	149	119	128	77	109	92.5	70.5	77			24
26		139	138	137	59	138	113	122	73.5	105	90	70.5	76			26
28		128	127	126	55.8	127	108	117	70	100	86.5	68	74.5	59.9		28
30		118	117	116	52.8	117	103	111	67	96	83.5	65.5	73	59.6	50.7	30
32		110	108	107	50.2	108	98	104	64	92	80	63.5	71	58.6	50.7	32
34			100	99.5	47.8	101	94	96.5	61.5	88	77.5	61.5	69.5	57.5	50.4	34
36			94	93	45.7	93.5	90.5	90	59.3	84.5	74.5	59.2	67.5	56.3	50	36
38			87.5	86.5	43.6	86	87	83	56.9	80.5	72	57.2	65.5	55.1	49.5	38
40			81	80	41.6	80	83	77	54.7	76	69.5	55.3	63.5	53.8	48.9	40
45			67	66	37.6	67	71	65.5	49.9	65	63.5	50.9	58.2	50.6	46.8	45
50				54.8	34.2	56.4	60.5	56.4	45.7	56.3	55.8	47	53.7	47.5	44.3	50
55				46.1	31.3	47.6	51.7	48.4	42.1	49	48.8	43.4	48.8	44.5	41.9	55
60						40.5	44.5	41.3	38.9	42.8	42.9	40.3	43.5	41.7	39.4	60
65						35	38.8	35.7	35.9	37.3	38	37.4	38.7	38.9	37	65
70						30.4	34.2	31.2	33.2	32.8	33.8	35	34.7	35.3	34.3	70
75						26.4	30.4	27.2	30.9	28.8	29.9	32.7	31.2	31.9	31.3	75
80								23.6	28.7	25.3	26.5	30.4	28	28.8	28.3	80
85								20.6	26.9	22.2	23.4	27.8	25	26.1	25.7	85
90								18	25.3	19.6	20.8	25.3	22.4	23.6	23.3	90
95										17.2	18.4	23	20	21.3	21	95
100										15.2	16.3	21	17.9	19.1	18.9	100
105											14.4	19.1	15.9	17.2	17	105
110											12.7	17.5	14.3	15.5	15.3	110
115											11.2	15.9	12.7	14	13.8	115
120												11.3	11.3	12.6	12.3	120
125													10	11.3	11.1	125
130													8.9	10.1	9.9	130
135														9	8.9	135
140														8	7.9	140
145															7.1	145
150															6.3	150
155															5.6	155
I	0	46	92	0	92	0	92	0	92	92	0	92	92	92	100	I
II	0	0	0	0	46	92	92	0	92	92	92	92	92	92	100	II
III	0	0	0	0	0	46	0	92	46	92	92	92	92	92	100	III
% IV	0	0	0	92	0	0	0	92	0	0	92	46	92	100	IV	%

" over rear

TAB 89026



44 ft - 171 ft



360°




6600 lbs

ft	44 ft	59 ft	73 ft	88 ft	102 ft	117 ft	132 ft	146 ft	160 ft	171 ft	ft
10	299"	281									10
11	282"	276									11
12	263	262									12
13	243	242									13
14	227	225	204	173	143						14
15	211	209	185	166	143	150					15
16	198	191	167	151	143	137					16
17	186	175	152	139	139	127	115				17
18	175	160	140	128	131	118	109				18
20	153	132	117	109	116	101	96	91	66		20
22	131	113	101	95	102	88	84.5	80	66		22
24	112	97.5	87	82.5	89.5	77	74	71	66	67.5	24
26	98	84.5	75	71	78.5	73.5	65	62.5	66	61	26
28	85	74	65.5	63	70	70	58.1	56.2	62.5	55.5	28
30	73.5	64.5	57.3	55.2	62	66.5	51.8	50.4	58.1	50	30
32	64	57.4	50.7	49.1	55.9	60.5	46.6	45.6	53.1	45.5	32
34		51.4	47.8	44.1	50.7	55.3	42.2	41.5	48.9	41.7	34
36		46.4	45.7	39.8	46.2	51	38.5	38	45.2	38.3	36
38		41.4	43.6	35.6	41.8	46.7	34.7	34.4	41.5	35	38
40		36.8	41.5	31.7	37.8	42.9	31.3	31.2	38.2	31.9	40
45		27.7	36.1	24.6	30.4	35.6	24.8	25.1	31.7	26	45
50			30	19.1	24.7	30	19.8	20.2	26.7	21.3	50
55			24.5	14.6	20.1	25.4	15.6	16.2	22.5	17.4	55
60				11	16.3	21.6	12.2	12.9	19	14.2	60
65				8	12.9	18.5	9.4	10.2	16.2	11.5	65
70					10.1	15.7	7	7.9	13.8	9.2	70
75					7.8	13.2			11.6	7.2	75
80						11.1			9.5	6.5	80
85						9.3			7.8		85
90						7.8			6.5	5	90
95									5.4		95
100									4.4		100
I	0	46	92/0	92	0	92/0	92	92	0	92	I
II	0	0	0/0	46	92	92/0	92	92	92	92	II
III	0	0	0/0	0	46	0/92	46	92	92	92	III
IV	0	0	0/92	0	0	0/92	0	0	92	46	IV

" over rear

TAB 88901


Lifting heights.

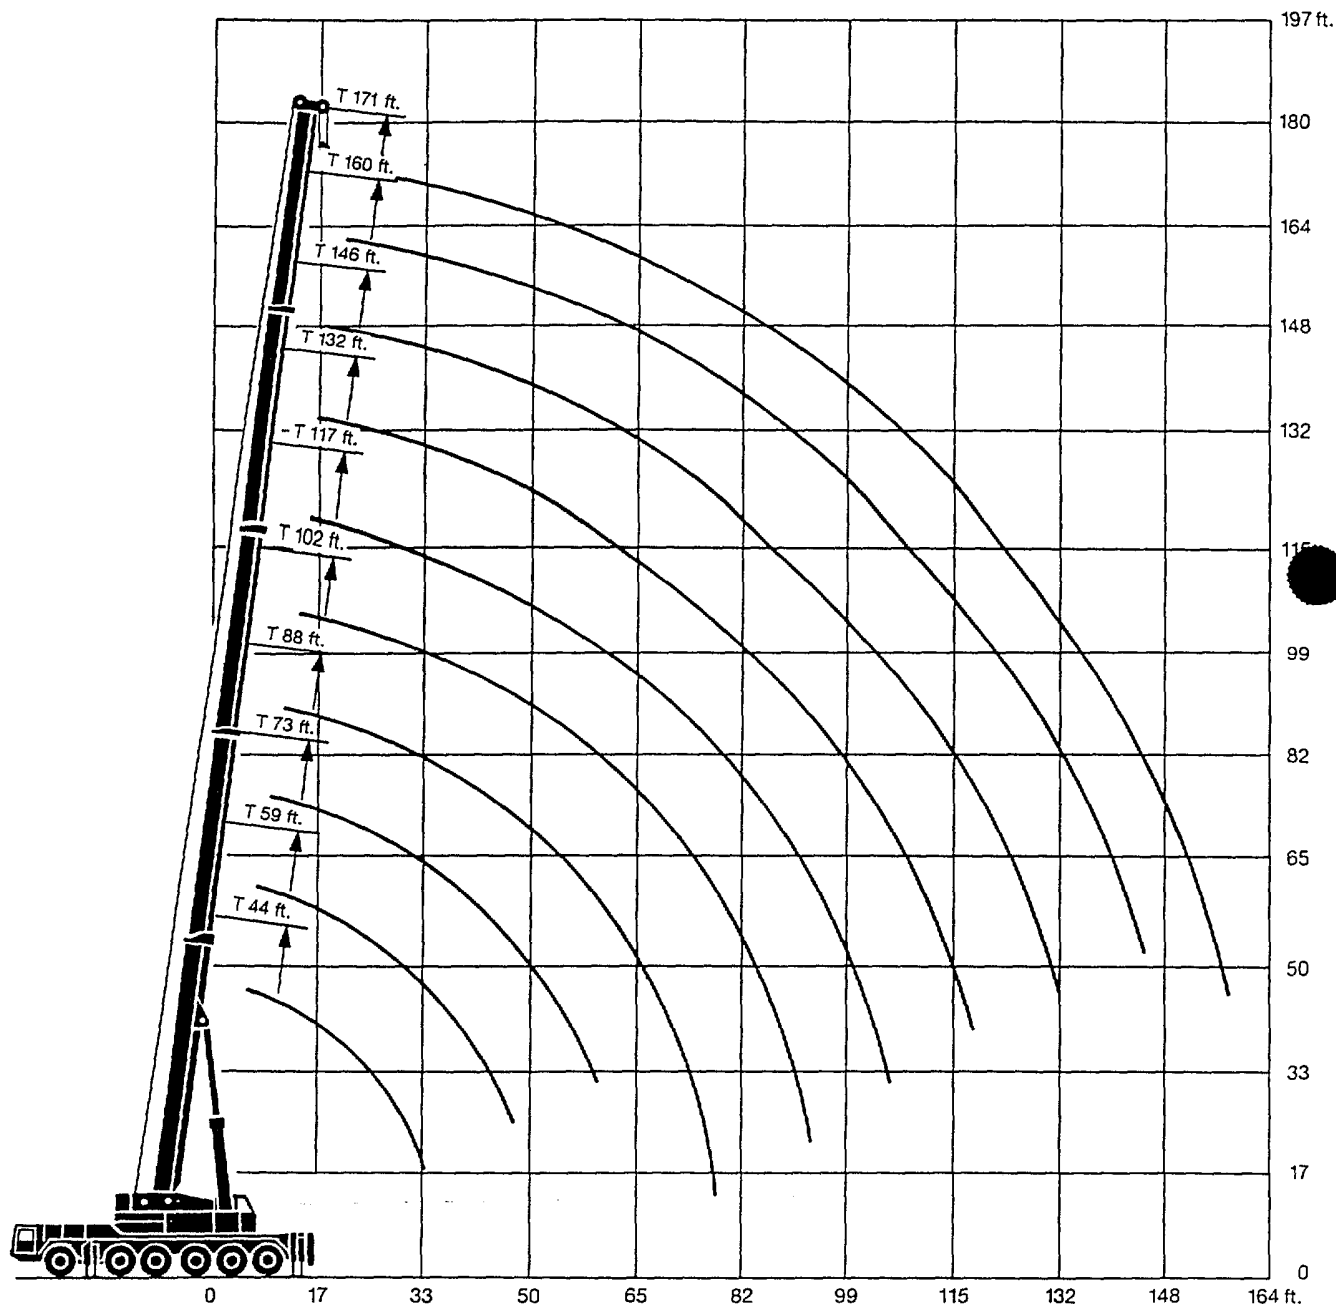


Lifting capacities at the folding jib.



132 ft* - 160 ft*



0° / 15° / 30°
36 ft - 151 ft



360°



101 500 lbs


85%

	132ft*			146ft*			160ft*			171ft*			160ft*												
	36ft			36ft			36ft			36ft			59ft			82ft			105ft			128ft		151ft	
	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	0°	
30	41.6																								30
32	41.2																								32
34	40.8			33.8																					34
36	40.4			33.6																					36
38	40			33.4																					38
40	39.6	30.5		33.2			27.1			21.3			18.4												40
45	38.3	29.4		32.6			27			21.3			18.2												45
50	36.9	27.9	19.4	32	23.9		26.5	18.3		21.2			18			12.7									50
55	35.4	26.5	18.5	31.5	22.8	15.4	25.8	17.6	11.9	21	16.5		17.8			12.4		9							55
60	34	25.2	17.6	30.8	21.7	14.7	25	16.9	11.3	20.8	16	10.1	17.4	13.7		12.1		8.9				5.5		3.2	60
65	32.9	23.7	16.8	29.7	20.7	14.1	23.7	16.3	10.7	20.4	15.5	9.3	17.2	13.2		11.7		8.8				5.4		3.2	65
70	31.6	22.5	15.9	28.6	19.8	13.6	22.6	15.7	10.2	20.2	14.9	8.9	17.1	12.7		11.3		8.6				5.2		3	70
75	30.4	21.3	15.2	27.3	18.8	12.9	21.4	15.2	9.7	19.7	14.3	8.4	16.8	12.2	8.9	11	8.4		8.4			5.1		2.8	75
80	29.2	20.2	14.7	25.9	17.8	12.2	20.4	14.6	9.4	19	13.6	7.9	16.4	11.7	8.6	10.6	8.2		8.2	6.9		5.1		2.7	80
85	27.5	19.2	14.1	24.6	16.8	11.7	19.5	14.1	9	18.5	12.9	7.5	15.8	11.2	8.3	10.2	8		8	6.7		4.9		2.7	85
90	26	18.3	13.5	23.3	15.9	11.1	18.5	13.1	8.6	17.7	12	7.2	15.2	10.8	8.1	9.8	7.6	5.7	7.8	6.6		4.7	3.4	2.5	90
95	24.3	17.3	13.1	22.1	15	10.7	17.7	12.3	8.3	17	11.2	6.8	14.6	10.4	7.7	9.5	7.3	5.6	7.8	6.4		4.5	3.2	2.4	95
100	22.4	16.4	12.7	21	14.3	10.3	17	11.5	7.9	16.3	10.5	6.4	13.9	10	7.2	9.2	7	5.5	7.7	6.2	4.6	4.3	3.1		100
105	20.3	15.5	12.1	19.9	13.6	9.9	16.3	10.9	7.8	15.8	9.7	5.8	13.3	9.6	7	9	6.8	5.3	7.5	6	4.4	4.1	3.1		105
110	18.5	14.8	11.9	18.5	13	9.6	15.7	10.3	7.4	15.2	9.2	5.6	12.8	9.3	6.9	8.8	6.5	5.2	7.3	5.7	4.2	3.9	2.9		110
115	16.8	14.1	11.6	17	12.3	9.3	15	9.8	7.2	14.5	8.7	5.5	12.2	9	6.7	8.5	6.3	4.8	7.2	5.5	4.1	3.8	2.8		115
120	15.3	13.5	11.3	15.5	11.6	9.2	14.3	9.3	7	13.8	8.1	5.2	11.7	8.7	6.5	8.2	6.1	4.6	7	5.3	4.1	3.6	2.7		120
125	13.8	13	11.1	14.1	11.1	9	13.7	8.9	6.8	13	7.6	4.8	11.1	8.4	6.3	8	5.9	4.6	6.8	5.1	3.9	3.4	2.7		125
130	12.4	12.4	11	12.8	10.5	8.8	12.4	8.4	6.6	11.9	7.3	4.5	10.8	8	5.9	7.6	5.8	4.4	6.6	5	3.7	3.4	2.5		130
135	11	11.6	10.6	11.4	10	8.6	11.4	8	6.6	11.1	6.8	4.2	10.3	7.6	5.7	7.2	5.6	4.1	6.4	4.8	3.6	3.3	2.3		135
140	9.7	10.5	10.2	10	9.6	8.5	10.3	7.7	6.5	10.2	6.3	4	9.8	7.2	5.6	7	5.4	3.8	6.2	4.6	3.6	3.2			140
145	8.5	9.1	9.6	8.8	9.2	8.5	9	7.4	6.3	9	5.8	3.9	9.4	6.9	5.6	6.7	5.3	3.6	6	4.5	3.6	3.1			145
150	7.6	8.2	8.5	8	8.5	8.3	8.2	7.2	6.3	8.1	5.5	3.7	8.8	6.7	5.4	6.4	5.1	3.6	5.7	4.3	3.4	2.9			150
155	6.6	7.2		7.1	7.7	7.9	7.4	6.9	6.2	7.4	5.2	3.5	8.1	6.5	5.2	6.2	4.8	3.5	5.4	4.2	3.2	2.8			155
160	5.7			6.3	6.9	7.2	6.6	6.7	6.1	6.6	4.8	3.3	7.4	6.3	5	6	4.6	3.3	5.2	4	3.1	2.7			160
165				5.4	6.1		5.9	6.4	6	5.8	4.5	3.1	6.6	6	4.8	5.8	4.4	3.2	5.1	3.8	2.9	2.6			165
170				4.6	5.2		5.1	5.8	5.4	5.2	4.2	2.9	6	5.7	4.6	5.8	4.2	3.2	4.9	3.7	2.7	2.5			170
175				3.9			4.3	5		4.4	3.9	2.8	5.3	5.5	4.6	5.4	3.9	3	4.7	3.6	2.5				175
180							3.6	4.2		3.7	3.7	2.6	4.7	5.2	4.5	5	3.7	2.9	4.5	3.6					180
185							2.9			3	3.3		4	4.6	4.3	4.4	3.6	2.9	4.3	3.4					185
190							2.3			2.3	2.6		3.4	4	3.9	3.9	3.4	2.7	3.9	3.3					190
195													2.7	3.3	3.5	3.3	3.3	2.7	3.4	3.1					195
200																2.7	3.2	2.6	2.9	2.8					200
205																	2.9	2.4		2.6					205
210																			2.5						210
215																			2.3						215
I	92			92			92			100						92									I
II	92			92			92			100						92									II
III	92			92			92			100						92									III
% IV	0			46			92			100						92									IV %

* with 10 ft adapter additional

TAB 89133 / 89181 / 89165

Lifting heights.

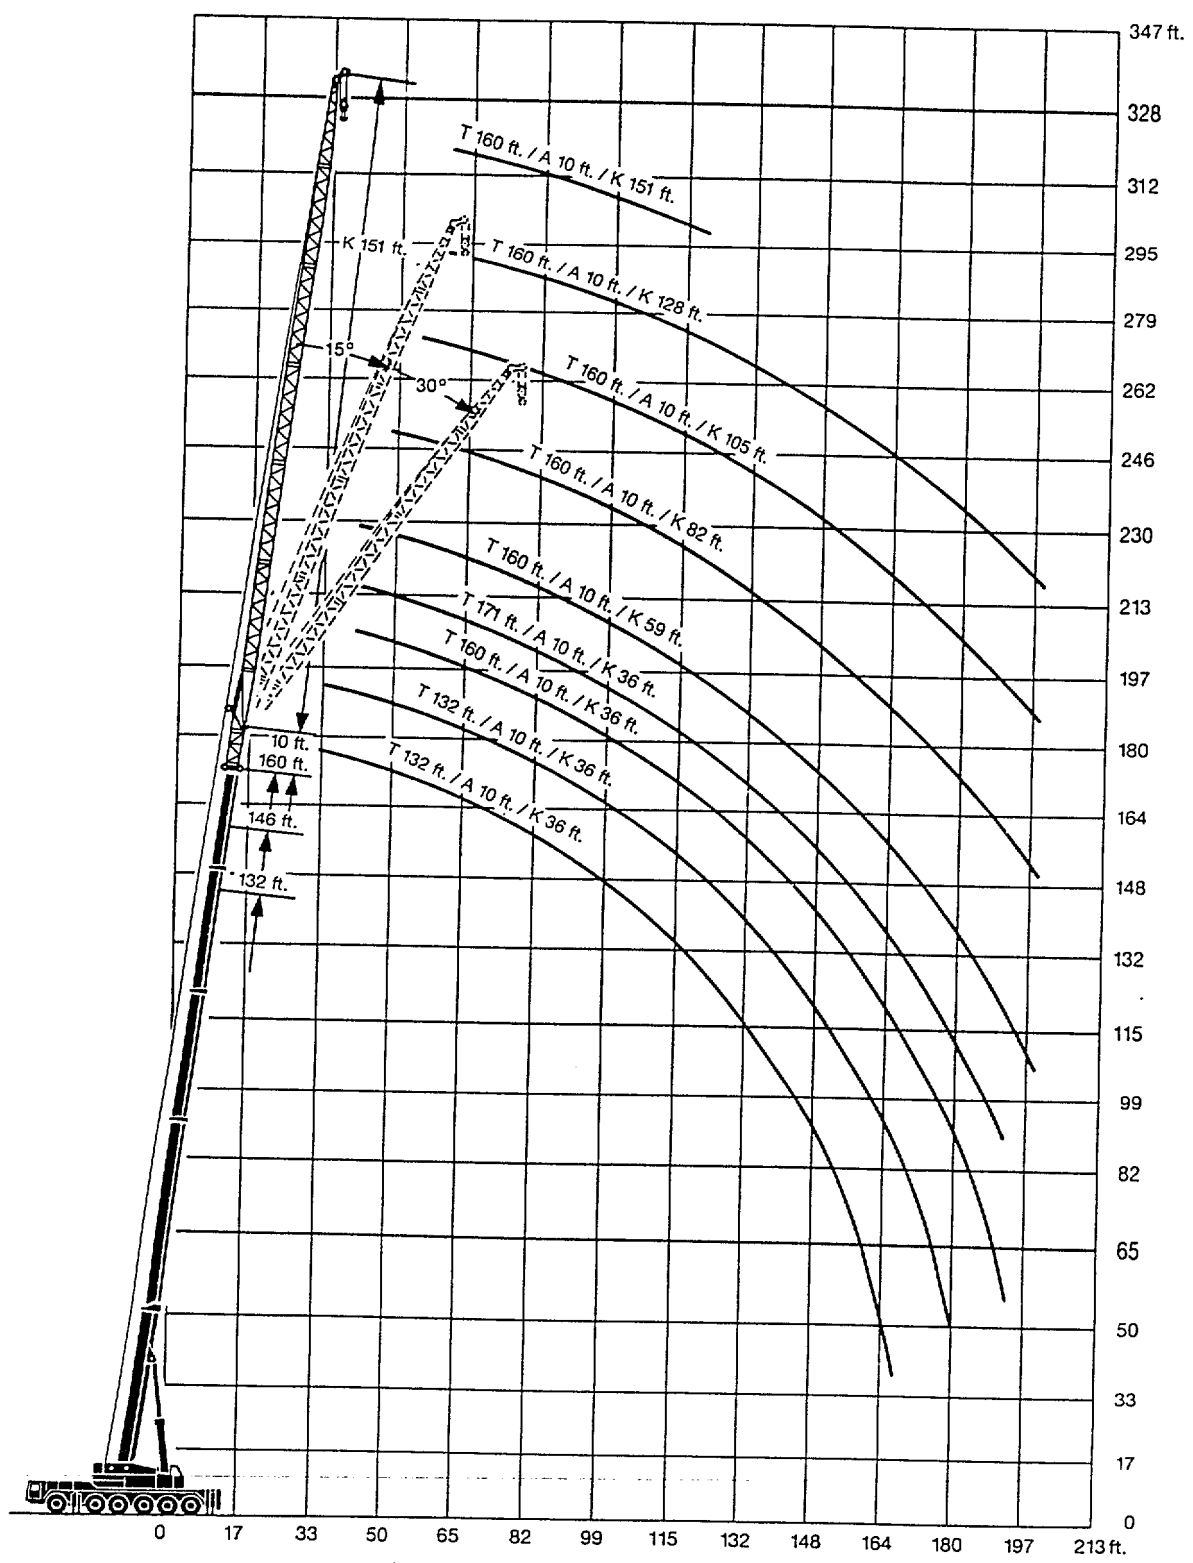

Lifting capacities at the luffing folding jib.



44 ft* - 171 ft*



36 ft - 151 ft



360°



101 500 lbs

85%


ft	44 ft*						73 ft*						102 ft*						ft
	36 ft	59 ft	82 ft	105 ft	128 ft	151 ft	36 ft	59 ft	82 ft	105 ft	128 ft	151 ft	36 ft	59 ft	82 ft	105 ft	128 ft	151 ft	
10	68.5																		10
11	64																		11
12	60																		12
13	56.7																		13
14	53	48.1					64												14
15	49.6	45					59.8												15
16	47.1	42.7					56.2												16
17	44.8	40.7	35.3				53.2												17
18	42.5	39	34.2				50.4												18
20	38.2	35.7	32.2				45.2	39.7					52.7						20
22	34.7	32.9	30.3				41.4	36.5					48.2						22
24	31.5	30.5	28.4	23.2			38.1	33.7	29.2				43.9	36.6					24
26	28.7	28.4	26.7	22			35.3	31.3	27.6				39.8	34.2					26
28	26.7	26.6	25	20.8	17.2		32.7	29.2	26.1	21.4			36.1	32.1					28
30	24.8	24.9	23.4	19.6	16.3		30.3	27.3	24.7	20.4			32.5	30.1	24.7				30
32	23	23.4	21.9	18.6	15.4		28.1	25.6	23.3	19.3			29.2	28.2	23.5				32
34		22	20.6	17.6	14.6	11.8		24.1	22.1	18.4	14.6		26.4	26.4	22.4	17.8			34
36		20.7	19.3	16.7	13.9	11.3		22.6	20.9	17.6	14		23.8	24.7	21.4	17			36
38		19.3	18.1	15.7	13.1	10.8		21.1	19.7	16.8	13.3		21.2	23	20.4	16.3			38
40		18.1	16.9	14.8	12.4	10.3		19.8	18.6	16	12.7	9.8		21.4	19.4	15.6	12.5		40
45		15.5	14.1	13	11	9.2		17	16.2	14.4	11.4	8.9		17.7	17.2	13.9	11.4		45
50		13.2	11.9	11.3	9.8	8.2		14.4	14.1	12.9	10.3	8.1		14.6	15.1	12.5	10.3	7.3	50
55			10.1	9.8	8.7	7.4		12	12.3	11.5	9.2	7.4		11.8	13.1	11.2	9.3	6.5	55
60			8.5	8.5	7.6	6.7			10.7	10.3	8.3	6.7			11.4	10	8.6	5.9	60
65			7.4	7.4	6.7	6.1			9.4	9.3	7.4	5.9			9.9	8.9	7.6	5.2	65
70			6.5	6.5	5.9	5.4			8.2	8.4	6.6	5.3			8.4	7.8	7	4.6	70
75			5.9	5.8	5.3	4.9			7.2	7.5	6	4.8			7	6.8	6.4	4.2	75
80				5.2	4.7	4.5				6.6	5.4	4.3			5.8	5.8	5.6	3.7	80
85				4.6	4.2	4.1				5.9	4.9	3.9			4.9	4.9	4.9	3.2	85
90				4.3	3.6	3.6				5.1	4.3	3.5				4.3	4.3	2.8	90
95				3.9	3.2	3.2				4.5	3.8	3.2				3.8	3.8		95
100					2.8	2.9				4	3.3	2.8				3.2	3.3		100
105											2.9						2.9		105
110											2.5						2.5		110
I			0						92						92				I
II			0						0						92				II
III			0						0						0				III
IV			0						0						0				IV

ft	132 ft*						146 ft*						160 ft*						171 ft*	ft
	36 ft	59 ft	82 ft	105 ft	128 ft	151 ft	36 ft	59 ft	82 ft	105 ft	128 ft	151 ft	36 ft	59 ft	82 ft	105 ft	128 ft	151 ft	36 ft	
30	38.3	28.8																		30
32	36.2	27.6																		32
34	34.2	26.5	19.7				30.7	22.4	16.3											34
36	32.1	25.3	19.1				29.6	21.9	16											36
38	30	24.1	18.4				28.6	21.3	15.6											38
40	28	22.9	17.7	14.4			27.5	20.7	15.3	11.7			27.1	18.4	12.9				21.2	40
45	22.8	20	16.1	13.3			24.6	19.2	14.5	11.2			26.3	18.4	12.9				20.1	45
50		17	14.6	12.3	9.3		20.4	17.3	13.6	10.7	7.4		23.5	17.5	12.7	9			18.2	50
55		14.6	13	11.4	8.7	6.4		15.6	12.8	10.2	7.1	4.9		16.5	12.5	8.9	5.6		16.2	55
60		12.8	11.4	10.5	8.1	6		14.1	11.8	9.6	6.9	4.7		15.4	12.2	8.7	5.6	3.4		60
65		10.9	9.9	9.4	7.6	5.6		12.1	10.6	8.9	6.6	4.5		13.4	11.3	8.5	5.6	3.4		65
70			8.7	8.4	7	5.3		10.4	9.5	8.3	6.3	4.3		11.5	10.2	8.2	5.6	3.4		70
75			7.5	7.5	6.5	5			8.4	7.6	6	4.2			9.2	7.7	5.6	3.4		75
80			6.4	6.7	5.9	4.8			7.3	6.9	5.7	4.1			8.3	7.1	5.5	3.4		80
85			5.9	6.1	5.4	4.4			6.6	6.3	5.3	3.8			7.3	6.6	5.1	3.2		85
90			5.1	5.4	5	4			5.8	5.8	4.9	3.4			6.4	6.2	4.8	2.8		90
95				4.7	4.5	3.7			4.9	5.2	4.4				5.5	5.7	4.4			95
100				4.3	4	3.3				4.7	4						5.2	4		100
105				3.9	3.6	2.9				4.2	3.6						4.6	3.6		105
110				3.5	3.3	2.7				3.8	3.4						4.1	3.5		110
115					2.9					3.3	3						3.5	3.1		115
120					2.6						2.7							2.8		120
I			92						92						92				100	I
II			92						92						92				100	II
III			92						92						92				100	III
IV			0						46						92				100	IV

* with 10 ft adapter additional

TAB 89190.1/2

Luffing folding jib.

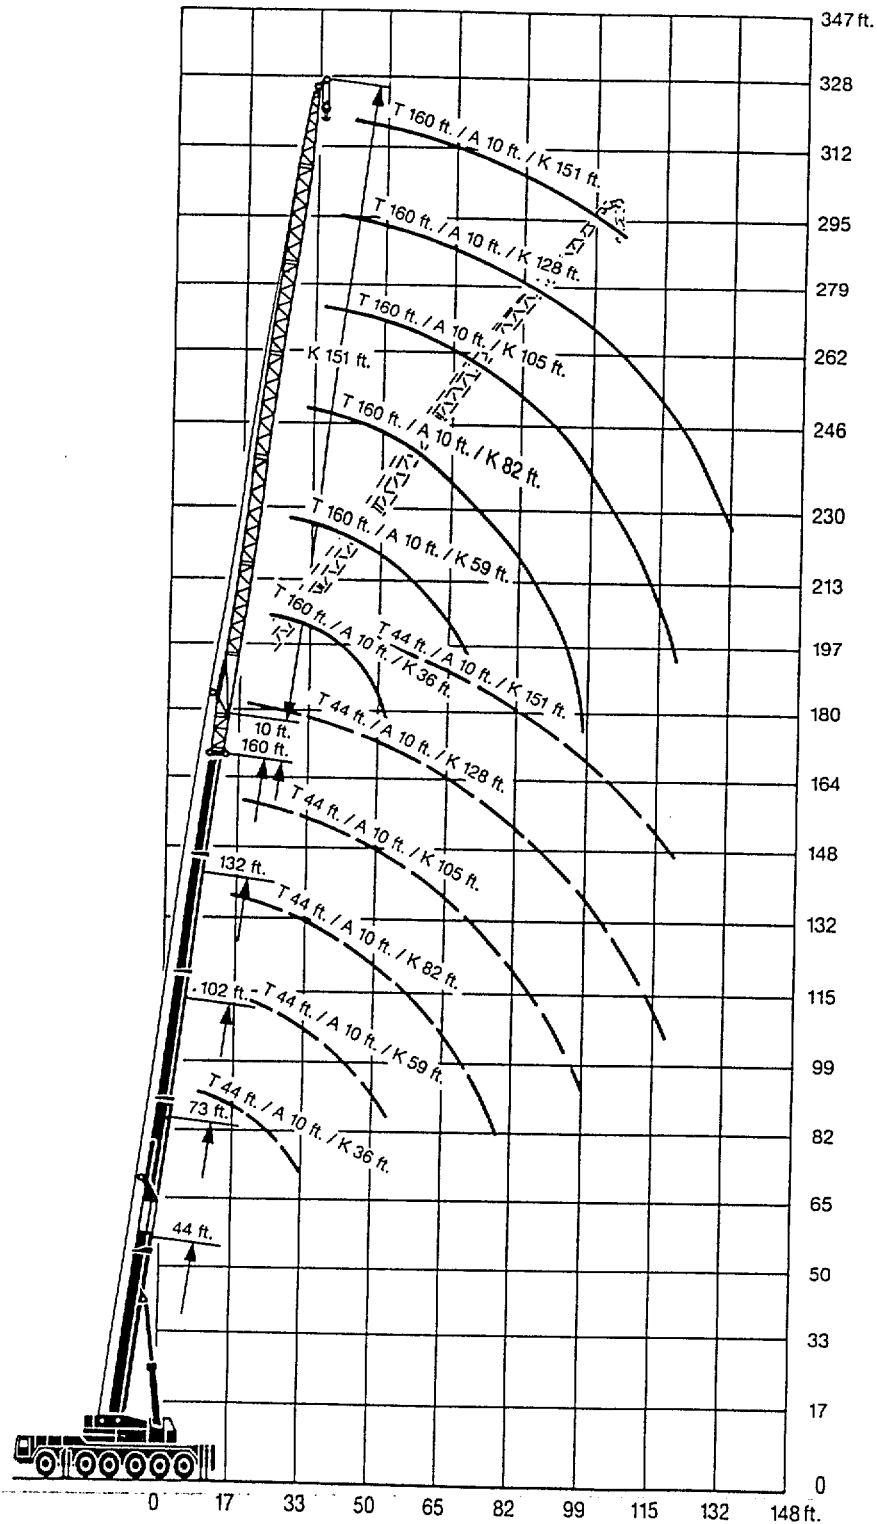

Telescopic boom: 83°

Lifting capacities at the luffing folding jib.



44 ft* - 171 ft*



36 ft - 151 ft



360°



101 500 lbs

85°

ft	44 ft*						73 ft*						102 ft*						ft
	36 ft	59 ft	82 ft	105 ft	128 ft	151 ft	36 ft	59 ft	82 ft	105 ft	128 ft	151 ft	36 ft	59 ft	82 ft	105 ft	128 ft	151 ft	
34	37																		34
36	34.1																		36
38	31.1																		38
40	28.5																		40
45	23.3																		45
50		19.8					28.5												50
55		16.6	16.7				23												55
60		13.9	14.4					21.2					31.7						60
65		11.5	12.6					17.7					24.9						65
70			10.9	10.3				15.1	14.5				19.3						70
75			9.4	9				12.8	12.8					17.8					75
80			8	7.8	7.1			11.3	9.9					15.2	14.6				80
85			6.9	6.9	6.4			9.8	8.6					13	12.7				85
90			5.6	6.1	5.6	4.6		8.8	7.6	7.1				11.1	11.4				90
95				5.5	5	4.1		7.9	6.8	6.3				10.1	9				95
100				4.9	4.4	3.7		7	6.1	5.7	4.7			8.9	8				100
105				4.4	3.9	3.2			5.3	5.1	4.4			7.8	7	6.1			105
110				3.8	3.5	2.8			4.8	4.7	3.8			7	6.3	5.5			110
115					3				4.2	4.4	3.4			6.3	5.6	5	4.1		115
120									3.7	4	3				4.8	4.4	3.7		120
125										3.6					4.1	3.9	3.4		125
130										3.2					3.5	3.5	3		130
135										3					3	3.1	2.6		135
140										2.8						2.8			140
I	0						92						92						I
II	0						0						92						II
III	0						0						0						III
% IV	0						0						0						% IV

ft	132 ft*						146 ft*						160 ft*						171 ft*	ft
	36 ft	59 ft	82 ft	105 ft	128 ft	151 ft	36 ft	59 ft	82 ft	105 ft	128 ft	151 ft	36 ft	59 ft	82 ft	105 ft	128 ft	151 ft	171 ft	
80	23.3																			80
85	19.6																			85
90		16.5					16.2													90
95		14						13					16.9							95
100		11.8	11.5					12.2											16	100
105			10.2					11.3	9				12.6							105
110			9.1					9.1	8.8				11.1							110
115			8	7.1				6.4	8.4				9.9							115
120			7	6.3				7.7	6.6				8.9	8.5						120
125			6.3	5.8	5.1			7	6.3					7.7	6.8					125
130			5.7	5	4.5			6.4	5.6					7.2	6.2					130
135				4.4	4.1	3		5.5	5.1	3.6				6.6	5.8					135
140				3.9	3.7	2.8			4.6	3.4				6.1	5.4					140
145				3.4	3.4				4.2	3.2					5.1	3.2				145
150				3	3				3.8	3.1					4.7	3.2				150
155					2.6				3.5	2.9					4.3	3.2				155
160															4	3.2				160
165															3.8	3.1				165
170															3.7	2.9				170
175																2.8				175
I	92						92						92						100	I
II	92						92						92						100	II
III	92						92						92						100	III
% IV	0						46						92						100	% IV

* with 10 ft adapter additional

TAB 89150.1/2

Lifting heights.

Luffing folding jib.

