

National Crane Series NBT60

Product Guide

ASME B30.5
Imperial 85%

Features

- 39,01 m (128 ft) five-section full power boom
- 54,4 t (60 USt) at 2,44 m (8 ft)
- Self-lubricating Easy Glide wear pads
- Hydraulically removable counterweight system
- Heavy lift load charts available



Features



Five-section boom

The Series NBT60 is equipped with a 39,0 (128 ft) boom. An optional 7,9 m - 13,7 m (26 ft - 45 ft) two-section offsettable manual extension is available.

Counterweight

Two-piece 1361 kg (3000 lb) each (total 2722 kg [6000 lb]) hydraulically removable counterweight slabs. Removable counterweight slabs can be stowed on front outrigger box for roading.



Deluxe tilting operator's cab

The Series NBT60 operator's cab includes: all-steel construction with 0° to 20° hydraulic tilting capability and acoustical lining and tinted glass throughout, air conditioning, deluxe seat with arm rest mounted single-axis electric controllers, windshield and sliding skylight with electric wipers, diesel heater with defroster, circulating fan, fire extinguisher, and dual cab mounted work lights.

National Crane NBT60

- 54,4 t (60 USt) maximum capacity
- 41,1 m (135 ft) maximum tip height (main boom)
- 54,6 m (179 ft) maximum tip height (boom with extension)



Outriggers

Equipped with left and right ground-level and in-cab CANbus outrigger controls. The Series NBT60 outriggers allow quick and easy crane set-up and includes a new outrigger beam position sensing system that aids the operator in selecting the right load chart based on the crane's outrigger footprint. The front outrigger box has an X-shaped footprint that eliminates the need for a single front outrigger.

Dimensions:

Full span:

Front: 7,09 m (23 ft 3 in) Rear: 7,39 m (24 ft 3 in)

Mid span:

Front: 4,72 m (15 ft 6 in) Rear: 4,90 m (16 ft 1 in)

Retracted-front and rear: 2,39 m (7 ft 10 in)

Features



**Product may be shown with optional equipment.*

National Crane is proud to introduce the Series NBT60 crane

The Series NBT60 represents the pinnacle of machine performance, combining the latest in both hydraulic and electronic machine control. This new product provides premium operator comfort with the latest Manitowoc cab design, simplified machine setup with no need for an SFO and front bumper control of the hoist(s).

- The cable follower will keep constant tension on the rope reducing the potential for bundling
- Speedy-reeve boom tip and sheave blocks simplify rigging changes by decreasing the time needed to change line reeving
- Easy Glide boom wear pads reduce the conditions that cause boom chatter and vibration. The net result is smoother crane operation
- Pressure compensated, load sensing hydraulic system
 - PTO mounted axial piston pump
 - Superstructure mounted reservoir with integral suction valve/filter, return filter, sight gauge, and temperature gauge
 - Oil cooler with 406 mm (16 in) fan and temperature sensor
 - Pressure transducers integral to the lift cylinder holding valve
- LMI system features a 178 mm (7 in) graphical, color display, data logger, error coding, and a USB connection port. Real time crane information is displayed with numerous operator features including: soft metric load chart conversion, hydraulic filter change reminders, an electronic hour meter, and truck diagnostics (fuel level, coolant temperature, and DPF status).
- The display console allows each crane control function to be set independently to reduce speed (100%, 75%, 50%, and 30%)
- Dual axis controls are optional for superior operator control, along with standard air conditioning, a diesel heater and ergonomic seat

Contents

| | |
|---|----|
| Specifications | 5 |
| Weights | 7 |
| Mounting configurations | 8 |
| Dimensions | 10 |
| Heavy lift (working range and load charts) | 12 |
| Minimum truck (working range and load charts) | 34 |
| Accessories | 56 |

Specifications

Boom and extension combinations data

NBT60-128: Equipped with a 9,7 m - 39,0 m (31.7 ft - 128 ft) five-section boom. This model can be equipped with a 7,9 m - 13,7 m (26 ft - 45 ft) two-section offsettable extension, providing a maximum tip height of 54,6 m (179 ft).














9,7 m - 39,0 m (31.7 ft - 128 ft) five-section full power boom **FJM-0S** 7,9 m - 13,7 m (26 ft - 45 ft) two-section offsettable 0° and 30° manual extension



Note: Maximum tip is measured with outriggers/stabilizers fully extended.

Specifications

NBT60 Series provisional winch data

| | 1 part line max. pull | 2 part line max. pull | 3 part line max. pull | 4 part line max. pull | 5 part line max. pull | 6 part line max. pull | 7 part line max. pull | 8 part line max. pull | 9 part line max. pull | 10 part line max. pull | 11 part line max. pull |
|---------------------------------|---|---|---|---|---|---|--|---|---|---|---|
| |  |  |  |  |  |  |  |  |  |  |  |
| Standard planetary winch | Headache ball | 1-sheave | | 2-sheave | | | | 5-sheave | | | |
| Low speed | 5103 kg (11,250 lb) 58,2 m/min (191 fpm) | 10 206 kg (22,500 lb) 28,9 m/min (95 fpm) | 15 309 kg (33,750 lb) 19,2 m/min (63 fpm) | 20 412 kg (45,000 lb) 17,3 m/min (47 fpm) | 25 515 kg (56,250 lb) 11,6 m/min (38 fpm) | 30 618 kg (67,500 lb) 9,4 m/min (31 fpm) | 35 712 kg (78,750 lb) 8,2 m/min (27 fpm) | 40 824 kg (90,000 lb) 7,0 m/min (23 fpm) | 45 926 kg (101,250 lb) 6,4 m/min (21 fpm) | 51 030 kg (112,500 lb) 5,8 m/min (19 fpm) | 54 431 kg (120,000 lb) 5,3 m/min (17 fpm) |
| High speed | 2268 kg (5,000 lb) 116,7 m/min (383 fpm) | 4536 kg (10,000 lb) 58,2 m/min (191 fpm) | 6804 kg (15,000 lb) 38,7 m/min (127 fpm) | 9072 kg (20,000 lb) 28,9 m/min (95 fpm) | 11 340 kg (25,000 lb) 23,2 m/min (76 fpm) | 13 608 kg (30,000 lb) 19,2 m/min (63 fpm) | 15 876 kg (35,000 lb) 16,5 m/min (54 fpm) | 18 144 kg (40,000 lb) 14,3 m/min (47 fpm) | 20 412 kg (45,000 lb) 12,8 m/min (42 fpm) | 22 680 kg (50,000 lb) 11,6 m/min (38 fpm) | 24 948 kg (55,000 lb) 10,6 m/min (34 fpm) |

*Cable supplied is 16 mm (5/8 in) diameter rotation resistant IWRC. Average breaking strength 25 583 kg (56,400 lb).

- All winch pulls and speeds are shown on the fourth layer.
- Winch line pulls would increase on the first, second, and third layers.
- Winch line speed would decrease on the first, second, and third layers.
- Winch line pulls may be limited by the winch capacity or the ANSI 5 to 1 cable safety factor.

| Winch | Fourth layer pull | Allowable cable pull |
|--|---|--|
| Standard planetary and auxiliary planetary | 2268 kg (5000 lb) high speed 5117 kg (11,280 lb) low speed | 5117 kg (11,280 lb) 5117 kg (11,280 lb) |

| Loadline deduct | | |
|-----------------|-----------------|------------------|
| | Aux boom nose | 36 kg (80 lb) |
| 7 USt | Downhaul weight | 78 kg (171 lb) |
| 20 USt | 1-sheave block | 181 kg (400 lb) |
| 40 USt | 3-sheave block | 272 kg (500 lb) |
| 60 USt | 5-sheave block | 498 kg (1098 lb) |

Weights

| Weight and CG estimates (see notes) | | | | |
|-------------------------------------|-----------------------|-------------------------|----------------------|----------------------|
| Standard NBT Configuration | Horizontal CG mm (in) | Weight w/fluids kg (lb) | CWT pinned (# slabs) | CWT stowed (# slabs) |
| NBT60128 | 438 (17.2) | 23 092 (50,909) | 2 | 0 |
| NBT60128 | 847 (33.4) | 23 092 (50,909) | 1 | 1 |
| NBT60128 | 1266 (49.8) | 23 092 (50,909) | 0 | 2 |
| NBT60128 | 683 (26.9) | 21 724 (47,893) | 1 | 0 |
| NBT60128 | 1128 (44.4) | 21 724 (47,893) | 0 | 1 |
| NBT60128 | 1039 (40.9) | 20 013 (44,121) | 0 | 0 |

Weight and center of gravity notes:

1. Information provided is for reference only (calculated weights).

2. Weight and CG data is applicable for a standard machine:

128 ft boom

2/3 part line block included

Main hoist only (IPO counterweight installed)

Standard decking with fixed access ladder

No boom extension equipped

No optional turret access step

No aux nose or optional hook blocks

3. All counterweight configurations are shown in table:

Pinned = attached to cylinders and turret (in use)

Stowed = attached to torsion box (not in use)

“2” = top & bottom slabs

“1” = top or bottom slab only


“0” = No slab pinned and/or stowed

If both stowed and pinned columns are “0”, the counterweight is physically removed from the machine. IPO is also assumed removed in this case.

For more information about mounting configuration options, please contact your local National Crane dealer.

Mounting configurations


Configuration 1 -NBT60128 (4-axle Minimum Truck)

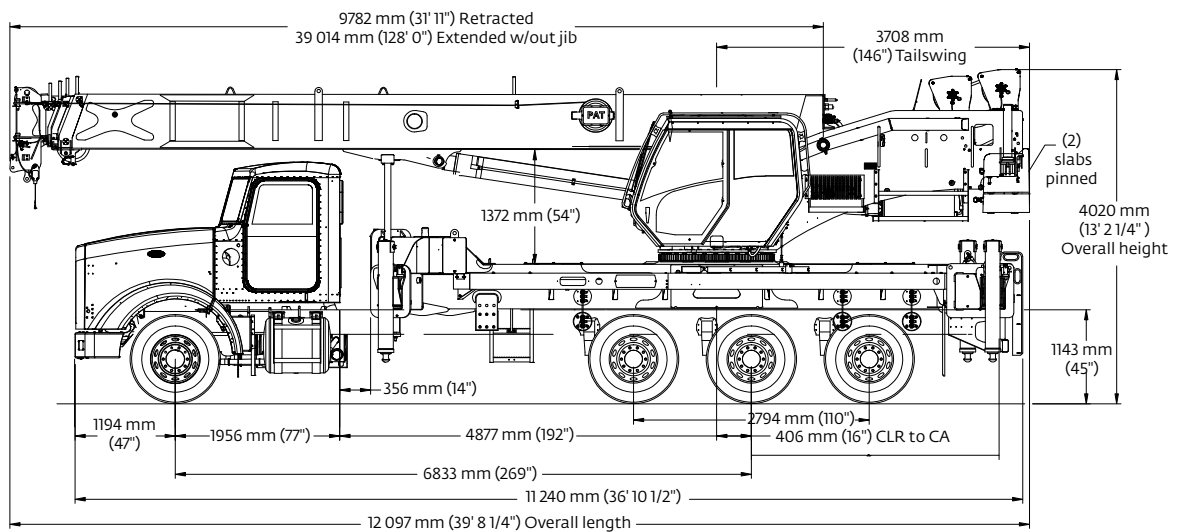

| | |
|-------------------------------------|-----------------------|
| Working area | 360° |
| Gross Axle Weight Rating, Front | 9072 kg (20,000 lb) |
| Gross Axle Weight Rating, Rear | 29 937 kg (66,000 lb) |
| Gross Vehicle Weight Rating | 39 009 kg (86,000 lb) |
| Wheelbase (WB) | 683 cm (269 in) |
| Cab to Axle/Cab to Trunnion (CA/CT) | 488 cm (192 in) |

| | |
|---|---|
| Frame Strength | 785 MPa (110,000 PSI) |
| Frame Section Modulus (SM); front axle to end of AF | 327 cm ³ (20 in ³) |
| Stability Weight, Front | 4445 kg (9800 lb) |
| Stability Weight, Rear | 5670 kg (12,500 lb) |
| *NOTE: Estimated axles scale weights prior to installation of crane assembly for 85% stability. | |

Configuration 2 – NBT60128 (Heavy Lift Truck – Tandem/Tridem)

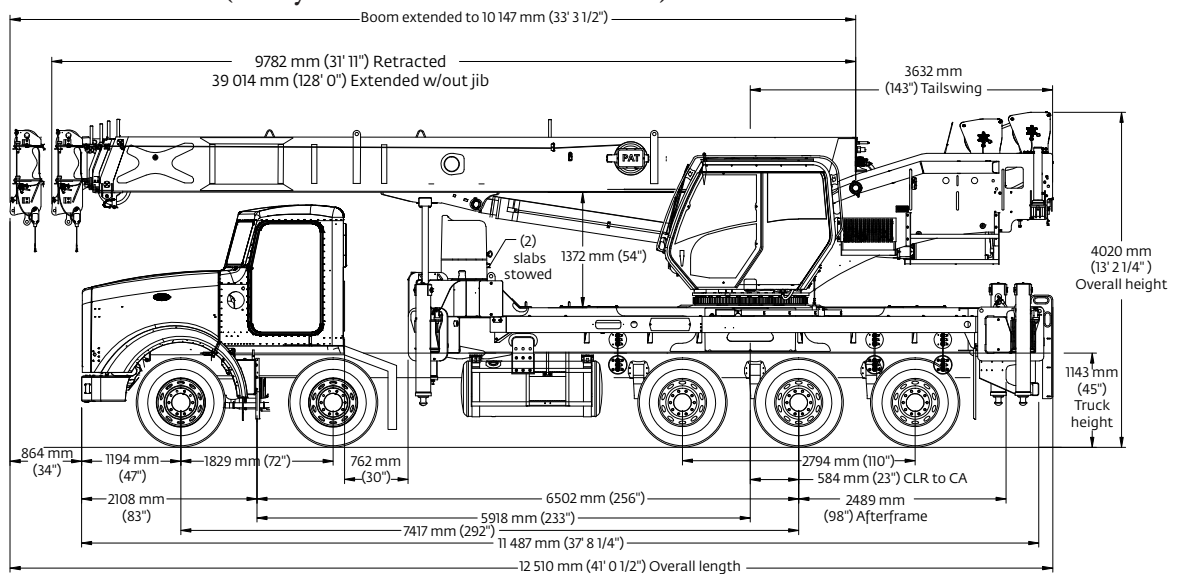


| | |
|-------------------------------------|------------------------|
| Working area | 360° |
| Gross Axle Weight Rating, Front | 18 144 kg (40,000 lb) |
| Gross Axle Weight Rating, Rear | 29 937 kg (66,000 lb) |
| Gross Vehicle Weight Rating | 48 080 kg (106,000 lb) |
| Wheelbase (WB) | 742 cm (292 in) |
| Cab to Axle/Cab to Trunnion (CA/CT) | 546 cm (215 in) |

| | |
|---|---|
| Frame Strength | 785 MPa (110,000 PSI) |
| Frame Section Modulus (SM); front axle to end of AF | 327 cm ³ (20 in ³) |
| Stability Weight, Front | 6940 kg (15,300 lb) |
| Stability Weight, Rear | 5125 kg (11,300 lb) |
| *NOTE: Estimated axles scale weights prior to installation of crane assembly for 85% stability. | |

Mounting configurations


Configuration 3 – NBT60128 (7-axle-Federal Bridge Law Compliant)

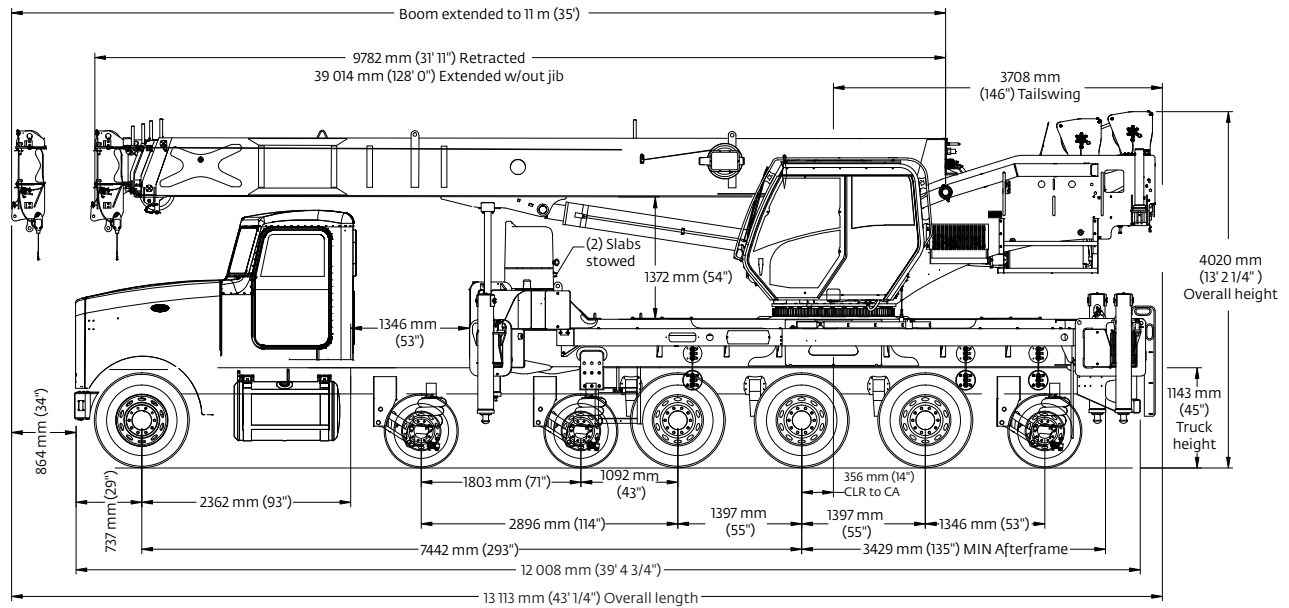


| | |
|---------------------------------------|-----------------------|
| Working area | 360° |
| Gross Axle Weight Rating, Front | 9072 kg (20,000 lb) |
| Gross Axle Weight Rating, Rear | 29 937 kg (66,000 lb) |
| Gross Vehicle Weight Rating, Pusher 1 | 3629 kg (8,000 lb) |
| Gross Vehicle Weight Rating, Pusher 2 | 3629 kg (8,000 lb) |
| Gross Vehicle Weight Rating, Tag | 3629 kg (8,000 lb) |
| Wheelbase (WB) | 744 cm (293 in) |

| | |
|---|---|
| Cab to Axle/Cab to Trunnion (CA/CT) | 508 cm (200 in) |
| Frame Strength | 785 MPa (110,000 PSI): |
| Frame Section Modulus (SM); front axle to end of AF | 327 cm ³ (20 in ³) |
| Stability Weight, Front | 5341 kg (11,775 lb)* |
| Stability Weight, Rear | 6031 kg (13,295 lb)* |
| *NOTE: Estimated axles scale weights prior to installation of crane assembly for 85% stability. | |

Dimensions



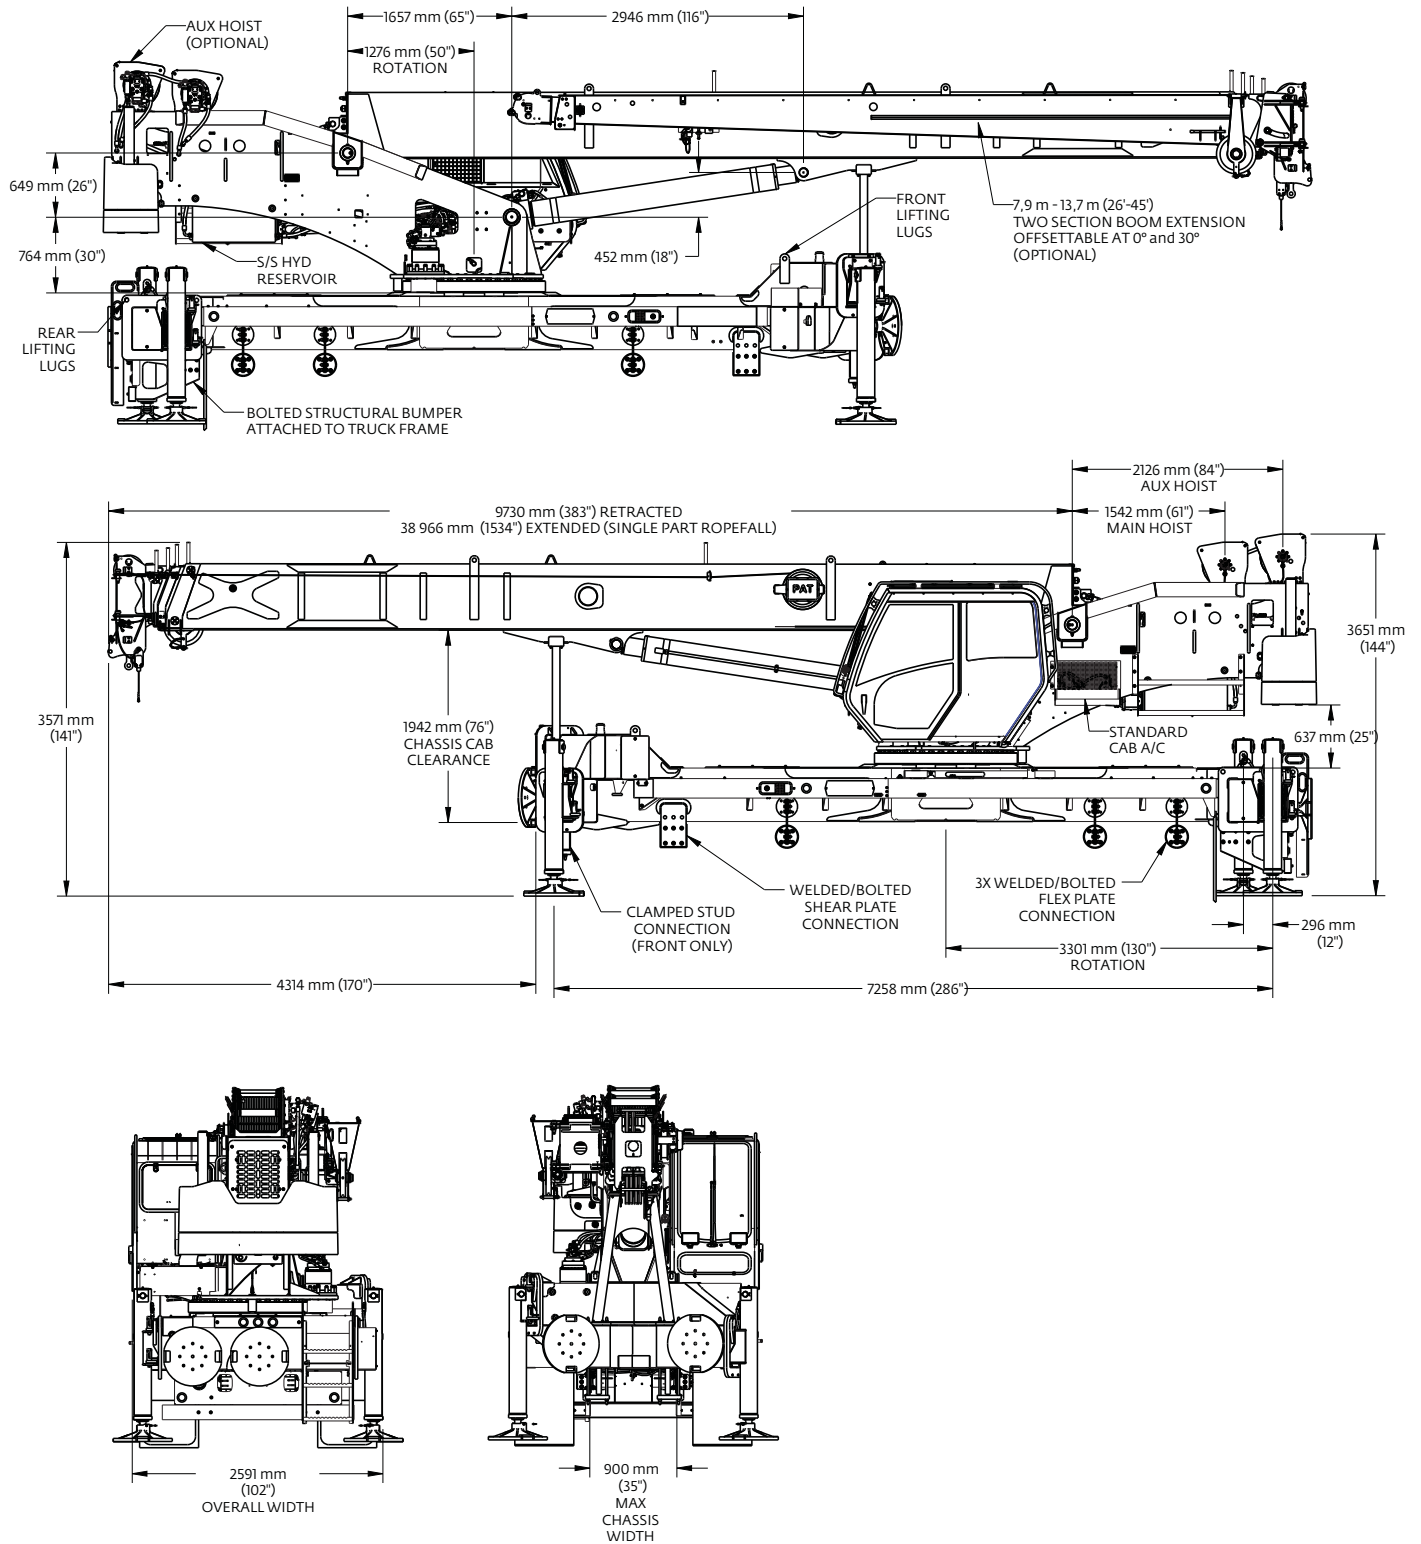


Dimensions

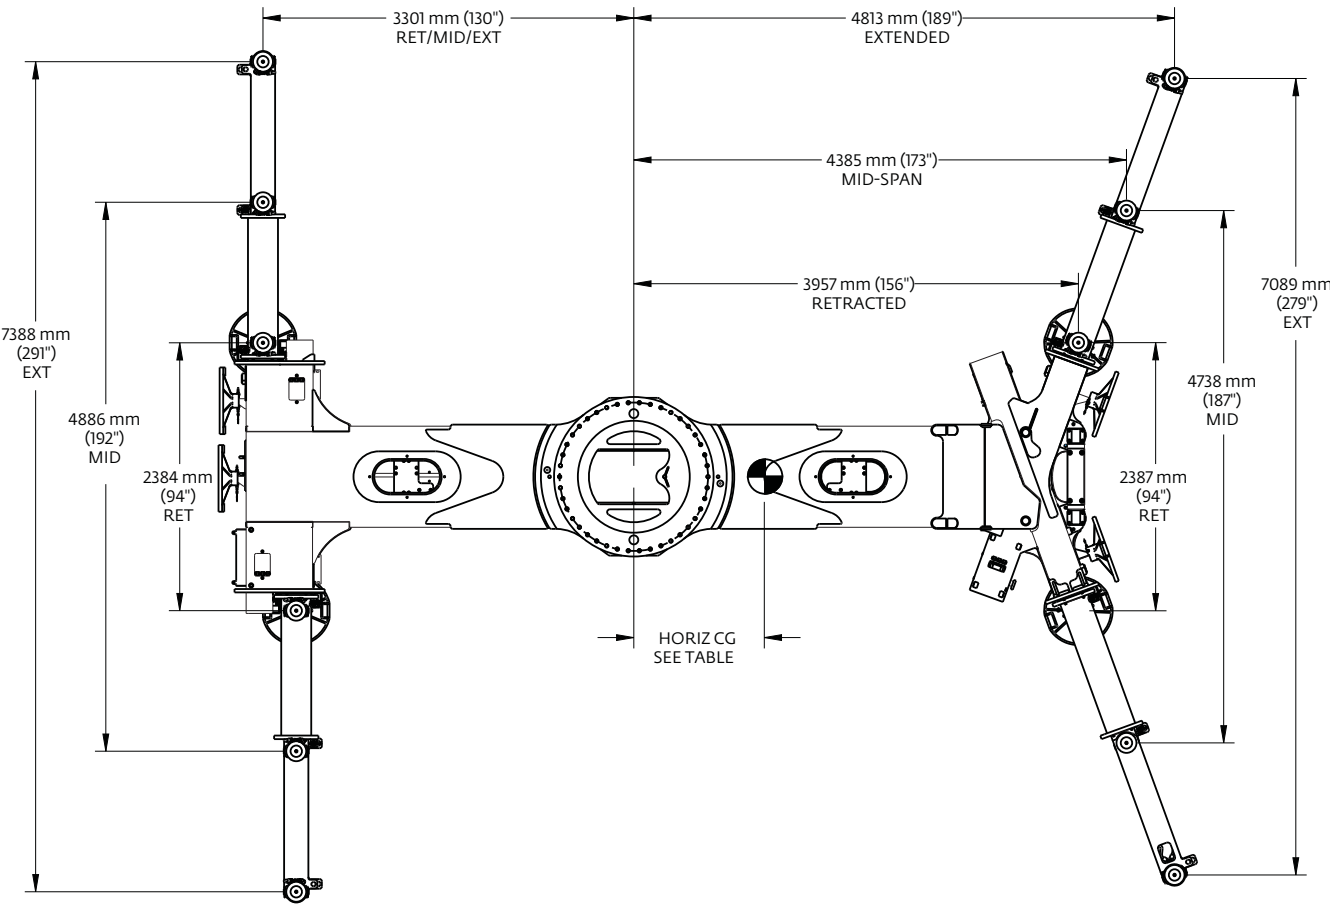

Working range

NBT60: 39,0 m (128 ft boom) with 7,9 m - 13,7 m (26 ft - 45 ft) extension (heavy lift)

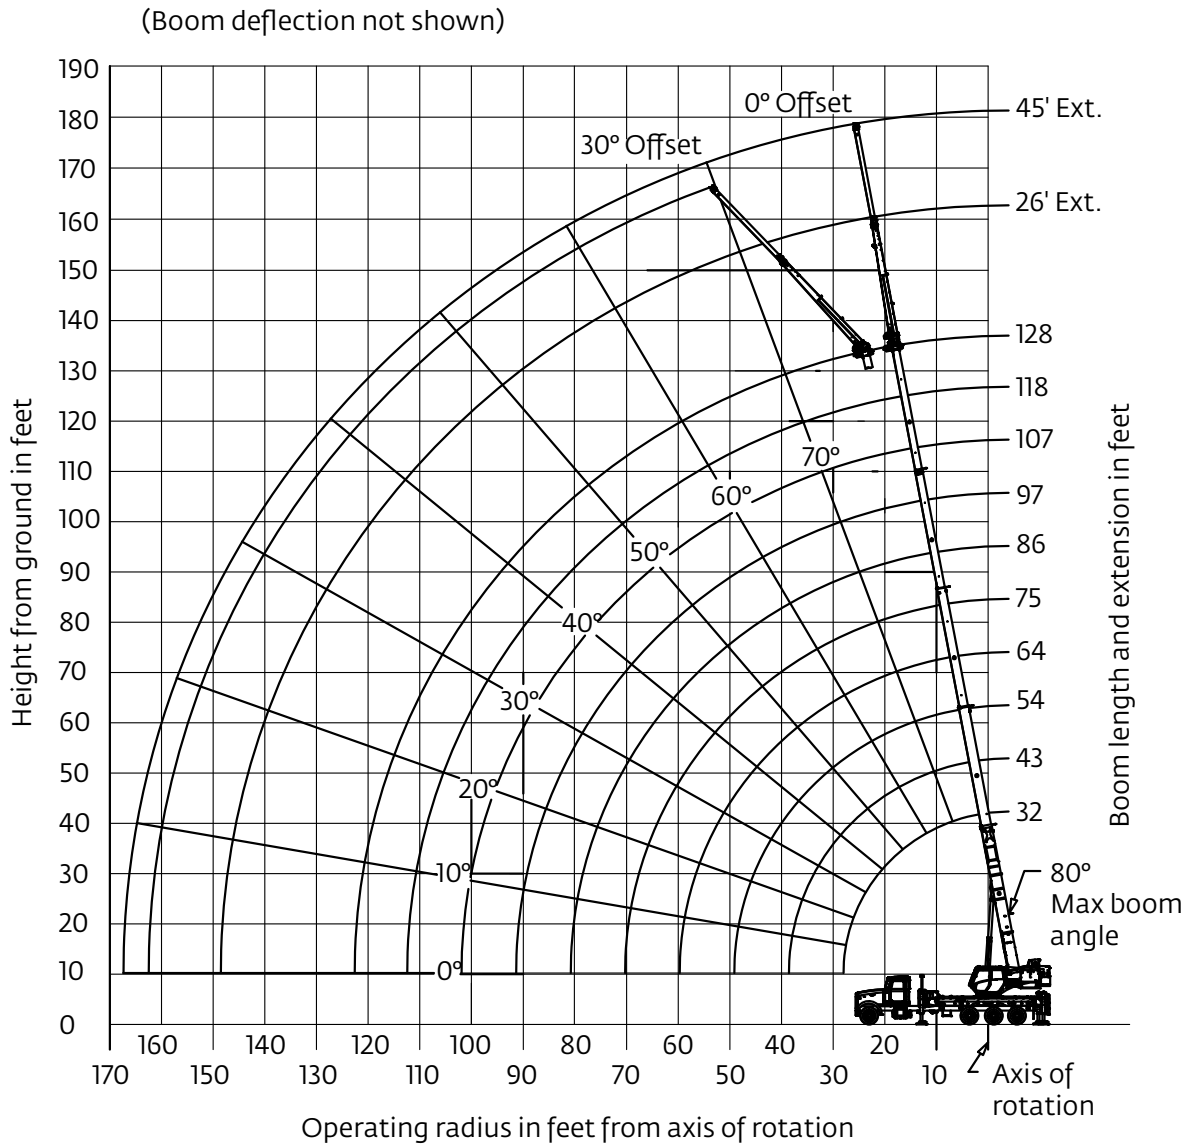

Dimensions are for largest furnished hook block and headache ball with anti-two block activated.

*This drawing shows the physical reach of the machine. Always refer to the load chart to see which portions of this diagram are valid for the specific machine configuration and where the loads are structurally or stability limited.

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load chart

NBT60: 39,01 m (128 ft) boom, 2722 kg (6000 lb) counterweight, 360°, outriggers 100% extended, (heavy lift)

| Radius in feet | #0001 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64.0) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 69,750 (53.1) | 50,000 (64.1) | 50,000 (70.0) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 53,150 (40.3) | 50,000 (56.2) | 47,950 (64.2) | 41,500 (68.8) | 34,100 (72.5) | 25,200 (75.0) | 21,000 (77.2) | | | |
| 25 | 36,400 (21.8) | 43,800 (47.6) | 43,450 (58.0) | 37,150 (63.9) | 30,100 (68.4) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 35,400 (37.4) | 36,600 (51.3) | 33,600 (58.7) | 27,100 (64.2) | 20,400 (68.0) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 26,350 (23.6) | 29,700 (43.9) | 30,100 (53.2) | 24,600 (59.8) | 18,500 (64.3) | 16,300 (68.0) | 14,700 (70.8) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 23,300 (35.3) | 23,650 (47.1) | 22,750 (55.2) | 17,050 (60.5) | 15,100 (64.8) | 13,650 (68.0) | 12,050 (70.8) | 9600 (72.8) |
| 45 | | | 18,800 (24.0) | 19,150 (40.3) | 19,450 (50.2) | 15,800 (56.5) | 14,000 (61.5) | 12,550 (65.0) | 11,300 (68.2) | 9600 (70.6) |
| 50 | | | | 15,800 (32.5) | 16,100 (44.7) | 14,600 (52.4) | 12,850 (58.0) | 11,750 (62.0) | 10,650 (65.9) | 9600 (68.4) |
| 55 | | | | 13,250 (22.2) | 13,500 (38.7) | 13,650 (47.9) | 12,000 (54.4) | 10,950 (59.2) | 10,000 (63.2) | 8750 (66.0) |
| 60 | | | | | 11,450 (31.7) | 11,650 (43.0) | 11,250 (50.9) | 10,300 (56.0) | 9400 (60.4) | 7850 (63.4) |
| 65 | | | | | 9900 (23.9) | 10,100 (38.1) | 10,300 (46.8) | 9700 (52.6) | 8850 (57.5) | 7000 (60.7) |
| 70 | | | | | 97150 (9.4) | 8700 (31.9) | 8900 (42.3) | 9050 (49.0) | 8400 (54.5) | 6300 (57.9) |
| 75 | | | | | | 7550 (24.4) | 7700 (37.4) | 7850 (45.0) | 7950 (51.3) | 5700 (55.1) |
| 80 | | | | | | 6500 (13.0) | 6700 (31.7) | 6800 (40.7) | 6950 (47.8) | 5150 (52.1) |
| 85 | | | | | | | 5800 (25.0) | 5950 (36.0) | 6050 (44.1) | 4650 (49.0) |
| 90 | | | | | | | 5050 (15.5) | 5200 (30.7) | 5300 (40.1) | 4150 (45.7) |
| 95 | | | | | | | | 4500 (24.2) | 4600 (35.7) | 3700 (42.2) |
| 100 | | | | | | | | 3900 (15.2) | 4000 (30.8) | 3300 (38.4) |
| 105 | | | | | | | | | 3500 (24.9) | 3000 (34.3) |
| 110 | | | | | | | | | 3000 (17.0) | 2650 (29.6) |
| 115 | | | | | | | | | | 1900 (23.8) |
| 120 | | | | | | | | | | 1100 (15.9) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | | | 3 | 11 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | | | | | | 107 | |

NOTE: () Boom angles are in degrees.

*Loads are structurally limited.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | |
|--|--------------------------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|--|
| Boom angle | Main boom length in feet | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | |
| 0° | 17,950 (27.5) | 10,000 (38.8) | 6850 (49.8) | 6100 (59.8) | 4250 (70.8) | 2850 (81.8) | 1750 (92.8) | 800 (102.8) | |

NOTE: () Reference radii in feet.

80059325

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

Load chart

NBT60: 39,01 m (128 ft) boom, 2722 kg (6000 lb) counterweight, over rear, outriggers 100% extended, (heavy lift)

| Radius in feet | #0003 | | | | | | | | | |
|---|--------------------------|------------------|------------------|-------------------|-------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64.0) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 69,750 (53.1) | 50,000 (64.1) | 50,000 (70.0) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 53,150 (40.3) | 50,000 (56.2) | 47,950 (64.2) | 41,500 (68.8) | 34,100 (72.5) | 25,200 (75.0) | 21,000 (77.2) | | | |
| 25 | 36,400 (21.8) | 43,800 (47.6) | 43,450 (58.0) | 37,150 (63.9) | 30,100 (68.4) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 35,400 (37.4) | 36,600 (51.3) | 33,600 (58.7) | 27,100 (64.2) | 20,400 (68.0) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 26,350 (23.6) | 30,950 (43.9) | 30,900 (53.2) | 24,600 (59.8) | 18,500 (64.3) | 16,300 (68.0) | 14,700 (70.8) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 25,700 (35.3) | 26,900 (47.1) | 22,750 (55.2) | 17,050 (60.5) | 15,100 (64.8) | 13,650 (68.0) | 12,050 (70.8) | 9600 (72.8) |
| 45 | | | 19,950 (24.1) | 22,550 (40.4) | 21,200 (50.3) | 15,800 (56.5) | 14,000 (61.5) | 12,550 (65.0) | 11,300 (68.2) | 9600 (70.6) |
| 50 | | | | 18,950 (32.6) | 19,250 (44.9) | 14,600 (52.4) | 12,850 (58.0) | 11,750 (62.0) | 10,650 (65.9) | 9600 (68.4) |
| 55 | | | | *15,100 (22.3) | 16,400 (38.9) | 13,650 (47.9) | 12,000 (54.4) | 10,950 (59.2) | 10,000 (63.2) | 8750 (66.0) |
| 60 | | | | | 14,100 (31.9) | 12,750 (43.1) | 11,250 (50.9) | 10,300 (56.0) | 9400 (60.4) | 7850 (63.4) |
| 65 | | | | | *12,200 (24.0) | 12,000 (37.7) | 10,600 (46.8) | 9700 (52.6) | 8850 (57.5) | 7000 (60.7) |
| 70 | | | | | *7150 (9.4) | 11,000 (32.2) | 10,050 (42.5) | 9200 (49.0) | 8400 (54.5) | 6300 (57.9) |
| 75 | | | | | | 9650 (24.6) | 9550 (37.6) | 8700 (45.2) | 7950 (51.3) | 5700 (55.1) |
| 80 | | | | | | *6700 (13.1) | 8700 (32.1) | 8300 (41.0) | 7600 (48.0) | 5150 (52.1) |
| 85 | | | | | | | 7700 (25.3) | 7850 (36.5) | 7250 (44.5) | 4650 (49.0) |
| 90 | | | | | | | *5950 (15.6) | 6950 (31.1) | 6950 (40.5) | 4150 (45.7) |
| 95 | | | | | | | | 6200 (24.7) | 6300 (36.3) | 3700 (42.2) |
| 100 | | | | | | | | *4750 (15.4) | 5650 (31.4) | 3300 (38.4) |
| 105 | | | | | | | | | 5000 (25.5) | 3000 (34.3) |
| 110 | | | | | | | | | *4200 (17.3) | 2650 (29.6) |
| 115 | | | | | | | | | | 1900 (23.8) |
| 120 | | | | | | | | | | 1100 (15.9) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | | | 3 | 11 |
| Maximum boom length (ft.) at 0° boom angle (no load) | | | | | | | | | 107 | |

NOTE: () Boom angles are in degrees.

*Loads are structurally limited.

#LMI operating code. Refer to LMI manual for operating instructions.

| Boom angle | Lifting capacities at zero degree boom angle | | | | | | | | | |
|---------------|--|------------------|----------------|----------------|----------------|----------------|----------------|----------------|--|--|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | | |
| 0° | 17,950 (27.5) | 10,000 (38.8) | 6850 (49.8) | 6100 (59.8) | 4250 (70.8) | 2850 (81.8) | 1750 (92.8) | 800 (102.8) | | |

NOTE: () Reference radii in feet.

80059329

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 2722 kg (6000 lb) counterweight, 360°, outriggers 100% extended, (heavy lift)

| Radius in feet | 26 ft LENGTH | | 45 ft LENGTH | |
|--|----------------|----------------|-----------------|----------------|
| | #0005 | #0007 | #0009 | #0011 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 5200 (68.4) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 5200 (66.7) | 4800 (71.7) | 3700 (69.9) | 2500 (77.0) |
| 70 | 4850 (64.7) | 4650 (69.7) | 3700 (68.4) | 2500 (75.2) |
| 75 | 4500 (62.6) | 4400 (67.5) | 3700 (66.9) | 2500 (73.5) |
| 80 | 4250 (60.5) | 4150 (65.2) | 3700 (65.4) | 2500 (71.7) |
| 85 | 3950 (58.3) | 4000 (62.9) | 3700 (63.8) | 2500 (69.8) |
| 90 | 3800 (56.1) | 3800 (60.5) | 3550 (61.9) | 2500 (67.9) |
| 95 | 3650 (53.8) | 3650 (58.1) | 3250 (59.9) | 2500 (65.9) |
| 100 | 3150 (51.2) | 3350 (55.4) | 3000 (57.8) | 2500 (63.9) |
| 105 | 2600 (48.4) | 2900 (52.5) | 2700 (55.6) | 2450 (61.7) |
| 110 | 2100 (45.5) | 2550 (49.5) | 2500 (53.5) | 2400 (59.5) |
| 115 | 1700 (42.5) | 2150 (46.3) | 2,300 (51.2) | 2350 (57.1) |
| 120 | 1350 (39.3) | 1650 (42.7) | 2050 (48.7) | 2300 (54.7) |
| 125 | 950 (35.8) | 1200 (38.9) | 1750 (46.0) | 2250 (52.1) |
| 130 | 650 (32.1) | 850 (34.8) | 1500 (43.3) | 2000 (49.1) |
| 135 | | 450 (30) | 1200 (40.4) | 1750 (45.9) |
| 140 | | | 900 (37.2) | 1350 (42.3) |
| 145 | | | 650 (33.9) | 900 (38.2) |
| 150 | | | | 600 (33.9) |
| Min. boom angle for indicated length (no load) | 29° | 30° | 30° | 31° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: (°) Boom angles are in degrees. 80059337

#LMI operating code. Refer to LMI manual for instructions.

*Loads are structurally limited.

**26 ft capacities are applicable to both 26 ft fixed and 26 ft tele extension.

BOOMEXTENSIONCAPACITYNOTES:

1. All capacities above the bold line are based on structural strength limitations.

2. 26 ft and 45 ft extension lengths may be used for single line lifting service.

3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.

4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.

5. Capacities listed are with outriggers properly extended and vertical jacks set only.

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 2722 kg (6000 lb) counterweight, over rear, outriggers 100% extended, (heavy lift)

| Radius in feet | 26 ft LENGTH | | 45 ft LENGTH | |
|--|-----------------|----------------|----------------|-----------------|
| | #0006 | #0008 | #0010 | #0012 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 5200 (68.4) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 5200 (66.7) | 4800 (71.7) | 3700 (69.9) | 2500 (77.0) |
| 70 | 4850 (64.7) | 4650 (69.7) | 3700 (68.4) | 2500 (75.2) |
| 75 | 4500 (62.6) | 4400 (67.5) | 3700 (66.9) | 2500 (73.5) |
| 80 | 4250 (60.5) | 4150 (65.2) | 3700 (65.4) | 2500 (71.7) |
| 85 | 3950 (58.3) | 4000 (62.9) | 3700 (63.8) | 2500 (69.8) |
| 90 | 3800 (56.1) | 3800 (60.5) | 3550 (61.9) | 2500 (67.9) |
| 95 | 3,650 (53.8) | 3650 (58.1) | 3250 (59.9) | 2500 (65.9) |
| 100 | 3150 (51.2) | 3350 (55.4) | 3000 (57.8) | 2500 (63.9) |
| 105 | 2600 (48.4) | 2900 (52.5) | 2700 (55.6) | 2450 (61.7) |
| 110 | 2100 (45.5) | 2550 (49.5) | 2500 (53.5) | 2,400 (59.5) |
| 115 | 1700 (42.5) | 2150 (46.3) | 2300 (51.2) | 2350 (57.1) |
| 120 | 1350 (39.3) | 1650 (42.7) | 2050 (48.7) | 2300 (54.7) |
| 125 | 950 (35.8) | 1200 (38.9) | 1750 (46.0) | 2250 (52.1) |
| 130 | 650 (32.1) | 850 (34.8) | 1500 (43.3) | 2000 (49.1) |
| 135 | | 450 (30) | 1200 (40.4) | 1750 (45.9) |
| 140 | | | 900 (37.2) | 1350 (42.3) |
| 145 | | | 650 (33.9) | 900 (38.2) |
| 150 | | | | 600 (33.9) |
| Min. boom angle for indicated length (no load) | 29° | 30° | 30° | 31° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees.

80059338

#LMI operating code. Refer to LMI manual for instructions.

*Loads are structurally limited.

**26 ft capacities are applicable to both 26 ft fixed and 26 ft tele extension.

BOOM EXTENSION CAPACITY NOTES:

1. All capacities above the bold line are based on structural strength limitations.
2. 26 ft and 45 ft extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.

4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only.

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load chart

NBT60: 39,01 m (128 ft) boom, 2722 kg (6000 lb) counterweight, 360°, outriggers 50% extended, (heavy lift)

| Radius in feet | #0401 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64.0) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 69,750 (53.1) | 50,000 (64.1) | 50,000 (70.0) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 38,200 (40.2) | 39,350 (56.2) | 40,000 (64.1) | 40,450 (68.8) | 34,100 (72.5) | 25,200 (75.0) | 21,000 (77.2) | | | |
| 25 | 24,800 (21.8) | 25,900 (47.5) | 26,450 (57.8) | 26,750 (63.7) | 27,100 (68.3) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 18,450 (37.3) | 19,000 (51.1) | 19,300 (58.4) | 19,600 (63.9) | 19,850 (67.9) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 13,750 (23.6) | 14,300 (43.7) | 14,600 (52.8) | 14,850 (59.4) | 15,100 (64.1) | 15,350 (67.9) | 14,700 (70.8) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 11,050 (36.0) | 11,350 (46.7) | 11,600 (54.6) | 11,750 (60.2) | 12,000 (64.5) | 12,200 (67.8) | 12,050 (70.8) | 9600 (72.8) |
| 45 | | | 8650 (25.2) | 8950 (40.7) | 9150 (50.1) | 9350 (56.5) | 9550 (61.3) | 9700 (64.9) | 9900 (68.2) | 9600 (70.6) |
| 50 | | | | 7200 (33.0) | 7450 (44.8) | 7650 (52.2) | 7800 (57.7) | 7950 (61.7) | 8100 (65.3) | 8300 (68.1) |
| 55 | | | | 5750 (23.2) | 6000 (38.9) | 6150 (47.7) | 6300 (54.0) | 6450 (58.4) | 6600 (62.4) | 6750 (65.4) |
| 60 | | | | | 4800 (32.1) | 5000 (42.9) | 5150 (50.1) | 5250 (55.0) | 5400 (59.4) | 5500 (62.6) |
| 65 | | | | | 3850 (23.6) | 4000 (37.5) | 4150 (45.9) | 4250 (51.5) | 4400 (56.3) | 4500 (59.9) |
| 70 | | | | | 3000 (9.2) | 3200 (31.4) | 3300 (41.4) | 3450 (47.8) | 3550 (53.1) | 3650 (57.0) |
| 75 | | | | | | 2500 (23.9) | 2600 (36.5) | 2700 (43.8) | 2800 (49.8) | 2900 (54.1) |
| 80 | | | | | | 1850 (12.6) | 2000 (30.9) | 2100 (39.6) | 2200 (46.3) | 2300 (51.0) |
| 85 | | | | | | | 1500 (24.2) | 1600 (34.9) | 1650 (42.7) | 1750 (47.9) |
| 90 | | | | | | | 1000 (14.8) | 1100 (29.6) | 1200 (38.7) | 1250 (44.5) |
| 95 | | | | | | | | 700 (23.3) | 800 (34.4) | 850 (41.0) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | | 17 | 30 | 37 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | | | | | 97 | | |

NOTE: () Boom angles are in degrees.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|------------------|----------------|----------------|----------------|----------------|---------------|--|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | | | |
| 0° | 17,950 (27.5) | 10,000 (38.8) | 6850 (49.8) | 4600 (59.8) | 2850 (70.8) | 1650 (81.8) | 750 (92.8) | | | |

NOTE: () Reference radii in feet.

80059331

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 2722 kg (6000 lb) counterweight, 360°, outriggers 50% extended, (heavy lift)

| Radius in feet | **26 ft LENGTH | | 45 ft LENGTH | |
|--|----------------|----------------|----------------|----------------|
| | #0405 | #0407 | #0409 | #0411 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 5200 (68.4) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 4300 (66.1) | 4800 (71.7) | 3700 (69.9) | 2500 (77.0) |
| 70 | 3450 (63.8) | 4550 (69.5) | 3700 (68.4) | 2500 (75.2) |
| 75 | 2650 (61.5) | 3600 (66.8) | 3700 (66.9) | 2500 (73.5) |
| 80 | 2000 (59.1) | 2800 (64.2) | 3050 (64.5) | 2500 (71.7) |
| 85 | 1450 (56.7) | 2150 (61.5) | 2400 (62.3) | 2500 (69.8) |
| 90 | 950 (54.2) | 1550 (58.8) | 1850 (60.1) | 2500 (67.9) |
| 95 | 550 (51.7) | 1050 (56.1) | 1400 (57.8) | 2400 (65.7) |
| 100 | | 600 (53.2) | 950 (55.5) | 1900 (63.1) |
| 105 | | | 600 (53.2) | 1400 (60.4) |
| 110 | | | | 1000 (57.8) |
| 115 | | | | 600 (55.1) |
| Min. boom angle for indicated length (no load) | 51° | 53° | 53° | 55° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees.

80059339

#LMI operating code. Refer to LMI manual for instructions.

*Loads are structurally limited.

**26 ft capacities are applicable to both 26 ft fixed and 26 ft tele extension.

BOOM EXTENSION CAPACITY

NOTES:

1. All capacities above the bold line are based on structural strength limitations.
2. 26ft and 45ft extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.

4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only.

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load chart

NBT60: 39,01 m (128 ft) boom, 2722 kg (6000 lb) counterweight, 360°, outriggers 0% extended, (heavy lift)

| Radius in feet | #0801 | | | | | | | | | |
|--|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 75,400 (68.1) | | | | | | | | | |
| 10 | 48,300 (64.0) | 49,550 (71.4) | | | | | | | | |
| 12 | 34,600 (59.8) | 35,650 (68.4) | 36,250 (73.2) | 36,750 (76.2) | | | | | | |
| 15 | 23,300 (53.1) | 24,250 (64.0) | 24,750 (69.8) | 25,150 (73.3) | 25,500 (76.1) | 25,850 (78.3) | | | | |
| 20 | 13,750 (40.2) | 14,600 (56.1) | 15,100 (63.8) | 15,400 (68.4) | 15,650 (71.9) | 15,900 (74.6) | 16,200 (76.9) | | | |
| 25 | 8650 (24.2) | 9550 (48.3) | 10,000 (58.3) | 10,250 (63.8) | 10,500 (68.1) | 10,650 (71.3) | 10,850 (73.9) | 11,100 (75.9) | 11,300 (77.5) | |
| 30 | | 6550 (38.3) | 6950 (51.6) | 7250 (58.6) | 7450 (63.9) | 7600 (67.6) | 7800 (70.7) | 7950 (72.9) | 8100 (75.0) | 8300 (76.7) |
| 35 | | 4350 (25.2) | 4800 (44.3) | 5050 (53.1) | 5250 (59.4) | 5400 (63.9) | 5550 (67.4) | 5700 (69.9) | 5850 (72.3) | 5950 (74.1) |
| 40 | | | 3200 (35.9) | 3500 (47.2) | 3650 (54.8) | 3800 (60.0) | 3950 (64.0) | 4050 (66.9) | 4200 (69.6) | 4300 (71.6) |
| 45 | | | 2000 (25.1) | 2300 (40.5) | 2450 (49.8) | 2600 (56.0) | 2750 (60.6) | 2850 (63.9) | 2950 (66.8) | 3000 (69.0) |
| 50 | | | | 1350 (32.9) | 1550 (44.5) | 1650 (51.8) | 1800 (57.0) | 1850 (60.7) | 1950 (64.0) | 2050 (66.5) |
| 55 | | | | 550 (23.0) | 800 (38.6) | 900 (47.3) | 1000 (53.3) | 1100 (57.5) | 1200 (61.1) | 1250 (63.8) |
| 60 | | | | | | | | | 550 (58.2) | 600 (61.2) |
| Minimum boom angle (°) for indicated length (no load) | | | | 20 | 35 | 44 | 50 | 54 | 58 | 61 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | 54 | | | | | | |

NOTE: () Boom angles are in degrees.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|----------------|----------------|--|--|--|--|--|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | | | | | | | |
| 0° | 7300 (27.5) | 3000 (38.8) | 1050 (49.8) | | | | | | | |

NOTE: () Reference radii in feet.

80059335

Load chart

NBT60: 39,01 m (128 ft) boom, 1361 kg (3000 lb) counterweight, 360°, outriggers 100% extended, (heavy lift)

| Radius in feet | #1001 | | | | | | | | | |
|---|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|--------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64.0) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 69,750 (53.1) | 50,000 (64.1) | 50,000 (70.0) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 53,150 (40.3) | 50,000 (56.2) | 47,950 (64.2) | 41,500 (68.8) | 34,100 (72.5) | 25,200 (75.0) | 21,000 (77.2) | | | |
| 25 | 36,400 (21.8) | 43,800 (47.6) | 43,450 (58.0) | 37,150 (63.9) | 30,100 (68.4) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 35,400 (37.4) | 36,600 (51.3) | 33,600 (58.7) | 27,100 (64.2) | 20,400 (68.0) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 26,350 (23.6) | 27,300 (43.9) | 27,700 (53.1) | 24,600 (59.8) | 18,500 (64.3) | 16,300 (68.0) | 14,700 (70.8) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 21,350 (35.2) | 21,700 (47.0) | 22,000 (55.1) | 17,050 (60.5) | 15,100 (64.8) | 13,650 (68.0) | 12,050 (70.8) | 9600 (72.8) |
| 45 | | | 17,150 (24.0) | 17,500 (40.3) | 17,750 (50.1) | 15,800 (56.5) | 14,000 (61.5) | 12,550 (65.0) | 11,300 (68.2) | 9600 (70.6) |
| 50 | | | | 14,350 (32.4) | 14,650 (44.6) | 14,600 (52.4) | 12,850 (58.0) | 11,750 (62.0) | 10,650 (65.9) | 9600 (68.4) |
| 55 | | | | 11,950 (22.2) | 12,200 (38.6) | 12,400 (47.8) | 12,000 (54.4) | 10,950 (59.2) | 10,000 (63.2) | 8750 (66.0) |
| 60 | | | | | 10,400 (32.4) | 10,600 (43.4) | 10,800 (50.8) | 10,300 (56.0) | 9400 (60.4) | 7850 (63.4) |
| 65 | | | | | 8850 (23.9) | 9050 (38.0) | 9250 (46.6) | 9400 (52.5) | 8850 (57.5) | 7000 (60.7) |
| 70 | | | | | *7150 (9.4) | 7750 (31.8) | 7900 (42.1) | 8050 (48.8) | 8200 (54.4) | 6300 (57.9) |
| 75 | | | | | | 6650 (24.3) | 6800 (37.2) | 6950 (44.8) | 7100 (51.1) | 5700 (55.1) |
| 80 | | | | | | 5700 (13.0) | 5900 (31.6) | 6000 (40.5) | 6150 (47.6) | 5150 (52.1) |
| 85 | | | | | | | 5050 (24.9) | 5200 (35.8) | 5300 (43.8) | 4650 (49.0) |
| 90 | | | | | | | 4350 (15.4) | 4450 (30.5) | 4600 (39.9) | 4150 (45.7) |
| 95 | | | | | | | | 3850 (24.1) | 3950 (35.5) | 3700 (42.2) |
| 100 | | | | | | | | 3250 (15.0) | 3400 (30.6) | 3300 (38.4) |
| 105 | | | | | | | | | 2900 (24.7) | 2950 (34.3) |
| 110 | | | | | | | | | 2400 (16.8) | 2500 (29.5) |
| 115 | | | | | | | | | | *1900 (23.8) |
| 120 | | | | | | | | | | *1100 (15.9) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | | | 3 | 11 |
| Maximum boom length (ft.) at 0° boom angle (no load) | | | | | | | | | 107 | |

NOTE: () Boom angles are in degrees.

*Loads are structurally limited.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|---------------|-------------|-------------|-------------|-------------|-------------|-------------|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | | |
| 0° | 17,950 (27.5) | 10,000 (38.8) | 6850 (49.8) | 6100 (59.8) | 4250 (70.8) | 2850 (81.8) | 1750 (92.8) | 800 (102.8) | | |

NOTE: () Reference radii in feet.

80059340

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load chart

NBT60: 39,01 m (128 ft) boom, 1361 kg (3000 lb) counterweight, over rear, outriggers 100% extended, (heavy lift)

| Radius in feet | #1003 | | | | | | | | | |
|---|--------------------------|------------------|-------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64.0) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 69,750 (53.1) | 50,000 (64.1) | 50,000 (70.0) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 53,150 (40.3) | 50,000 (56.2) | 47,950 (64.2) | 41,500 (68.8) | 34,100 (72.5) | 25,200 (75.0) | 21,000 (77.2) | | | |
| 25 | 36,400 (21.8) | 43,800 (47.6) | 43,450 (58.0) | 37,150 (63.9) | 30,100 (68.4) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 35,400 (37.4) | 36,600 (51.3) | 33,600 (58.7) | 27,100 (64.2) | 20,400 (68.0) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 26,350 (23.6) | 30,950 (43.9) | 30,900 (53.2) | 24,600 (59.8) | 18,500 (64.3) | 16,300 (68.0) | 14,700 (70.8) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 25,150 (35.3) | 25,500 (47.1) | 22,750 (55.2) | 17,050 (60.5) | 15,100 (64.8) | 13,650 (68.0) | 12,050 (70.8) | 9600 (72.8) |
| 45 | | | *19,950 (24.1) | 20,950 (40.4) | 21,200 (50.3) | 15,800 (56.5) | 14,000 (61.5) | 12,550 (65.0) | 11,300 (68.2) | 9600 (70.6) |
| 50 | | | | 17,550 (32.5) | 17,800 (44.8) | 14,600 (52.4) | 12,850 (58.0) | 11,750 (62.0) | 10,650 (65.9) | 9600 (68.4) |
| 55 | | | | 14,850 (22.3) | 15,100 (38.8) | 13,650 (47.9) | 12,000 (54.4) | 10,950 (59.2) | 10,000 (63.2) | 8750 (66.0) |
| 60 | | | | | 13,000 (31.8) | 12,750 (43.1) | 11,250 (50.9) | 10,300 (56.0) | 9400 (60.4) | 7850 (63.4) |
| 65 | | | | | 11,200 (24.0) | 11,400 (37.7) | 10,600 (46.8) | 9700 (52.6) | 8850 (57.5) | 7000 (60.7) |
| 70 | | | | | *7150 (9.4) | 10,050 (32.1) | 10,050 (42.5) | 9200 (49.0) | 8400 (54.5) | 6300 (57.9) |
| 75 | | | | | | 8800 (24.5) | 8950 (37.6) | 8700 (45.2) | 7950 (51.3) | 5700 (55.1) |
| 80 | | | | | | *6700 (13.1) | 7900 (31.9) | 8000 (41.0) | 7600 (48.0) | 5150 (52.1) |
| 85 | | | | | | | 6950 (25.2) | 7100 (36.3) | 7200 (44.5) | 4650 (49.0) |
| 90 | | | | | | | *5950 (15.6) | 6250 (30.9) | 6400 (40.5) | 4150 (45.7) |
| 95 | | | | | | | | 5550 (24.5) | 5650 (36.1) | 3700 (42.2) |
| 100 | | | | | | | | *4750 (15.4) | 5000 (31.1) | 3300 (38.4) |
| 105 | | | | | | | | | 4400 (25.2) | 3000 (34.3) |
| 110 | | | | | | | | | 3900 (17.3) | 2650 (29.6) |
| 115 | | | | | | | | | | 1900 (23.8) |
| 120 | | | | | | | | | | 1100 (15.9) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | | | 3 | 11 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | | | | | | 107 | |

NOTE: () Boom angles are in degrees.

*Loads are structurally limited.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | | |
| 0° | 17,950 (27.5) | 10,000 (38.8) | 6850 (49.8) | 6100 (59.8) | 4250 (70.8) | 2850 (81.8) | 1750 (92.8) | 800 (102.8) | | |

NOTE: () Reference radii in feet.

80059344

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 1361 kg (3000 lb) counterweight, 360°, outriggers 100% extended, (heavy lift)

| Radius in feet | 26 ft LENGTH | | 45 ft LENGTH | |
|--|----------------|----------------|----------------|-----------------|
| | #1005 | #1007 | #1009 | #1011 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 5200 (68.4) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 5200 (66.7) | 4800 (71.7) | 3700 (69.9) | 2500 (77.0) |
| 70 | 4850 (64.7) | 4650 (69.7) | 3700 (68.4) | 2500 (75.2) |
| 75 | 4500 (62.6) | 4400 (67.5) | 3700 (66.9) | 2500 (73.5) |
| 80 | 4250 (60.5) | 4150 (65.2) | 3700 (65.4) | 2500 (71.7) |
| 85 | 3950 (58.3) | 4000 (62.9) | 3700 (63.8) | 2500 (69.8) |
| 90 | 3800 (56.1) | 3800 (60.5) | 3550 (61.9) | 2500 (67.9) |
| 95 | 3650 (53.8) | 3650 (58.1) | 3250 (59.9) | 2500 (65.9) |
| 100 | 3150 (51.2) | 3350 (55.4) | 3000 (57.8) | 2500 (63.9) |
| 105 | 2600 (48.4) | 2900 (52.5) | 2700 (55.6) | 2450 (61.7) |
| 110 | 2100 (45.5) | 2550 (49.5) | 2500 (53.5) | 2400 (59.5) |
| 115 | 1700 (42.5) | 2150 (46.3) | 2300 (51.2) | 2350 (57.1) |
| 120 | 1350 (39.3) | 1650 (42.7) | 2050 (48.7) | 2300 (54.7) |
| 125 | 950 (35.8) | 1200 (38.9) | 1750 (46.0) | 2250 (52.1) |
| 130 | 650 (32.1) | 850 (34.8) | 1500 (43.3) | 2000 (49.1) |
| 135 | | 450 (30) | 1200 (40.4) | 1700 (45.6) |
| 140 | | | 900 (37.2) | *1350 (42.3) |
| 145 | | | 650 (33.9) | *900 (38.2) |
| 150 | | | | *600 (33.9) |
| Min. boom angle for indicated length (no load) | 29° | 30° | 30° | 31° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees.

80059352

*Loads are structurally limited.

#LMI operating code. Refer to LMI manual for instructions.

**26 ft capacities are applicable to both 26 ft fixed and 26 ft telescopic extension.

BOOM EXTENSION CAPACITY NOTES:

1. All capacities above the bold line are based on structural strength limitations.
2. 26 ft and 45 ft extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.
4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only.

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 1361 kg (3000 lb) counterweight, over rear, outriggers 100% extended, (heavy lift)

| Radius in feet | 26 ft LENGTH | | 45 ft LENGTH | |
|--|----------------|----------------|----------------|----------------|
| | #1006 | #1008 | #1010 | #1012 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 5200 (68.4) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 5200 (66.7) | 4800 (71.7) | 3700 (69.9) | 2500 (77.0) |
| 70 | 4850 (64.7) | 4650 (69.7) | 3700 (68.4) | 2500 (75.2) |
| 75 | 4500 (62.6) | 4400 (67.5) | 3700 (66.9) | 2500 (73.5) |
| 80 | 4250 (60.5) | 4150 (65.2) | 3700 (65.4) | 2500 (71.7) |
| 85 | 3950 (58.3) | 4000 (62.9) | 3700 (63.8) | 2500 (69.8) |
| 90 | 3800 (56.1) | 3800 (60.5) | 3550 (61.9) | 2500 (67.9) |
| 95 | 3650 (53.8) | 3650 (58.1) | 3250 (59.9) | 2500 (65.9) |
| 100 | 3150 (51.2) | 3350 (55.4) | 3000 (57.8) | 2500 (63.9) |
| 105 | 2600 (48.4) | 2900 (52.5) | 2700 (55.6) | 2450 (61.7) |
| 110 | 2100 (45.5) | 2550 (49.5) | 2500 (53.5) | 2400 (59.5) |
| 115 | 1700 (42.5) | 2150 (46.3) | 2300 (51.2) | 2350 (57.1) |
| 120 | 1350 (39.3) | 1650 (42.7) | 2050 (48.7) | 2300 (54.7) |
| 125 | 950 (35.8) | 1200 (38.9) | 1750 (46.0) | 2250 (52.1) |
| 130 | 650 (32.1) | 850 (34.8) | 1500 (43.3) | 2000 (49.1) |
| 135 | | 450 (30) | 1200 (40.4) | 1750 (45.9) |
| 140 | | | 900 (37.2) | 1350 (42.3) |
| 145 | | | 650 (33.9) | 900 (38.2) |
| 150 | | | | 600 (33.9) |
| Min. boom angle for indicated length (no load) | 29° | 30° | 30° | 31° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees.

80059353

#LMI operating code. Refer to LMI manual for instructions.

26 ft capacities are applicable to both 26 ft fixed and 26 ft telescopic extension.

BOOM EXTENSION CAPACITY NOTES:

1. All capacities above the bold line are based on structural strength limitations
2. 26ft and 45ft extension lengths may be used for single line lifting service.

3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.

4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are without outriggers properly extended and vertical jacks set only.

Load chart

NBT60: 39,01 m (128 ft) boom, 1361 kg (3000 lb) counterweight, 360°, outriggers 50% extended, (heavy lift)

| Radius in feet | #1401 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64.0) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 64,200 (53.1) | 50,000 (64.1) | 50,000 (70.0) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 34,650 (40.2) | 35,750 (56.2) | 36,400 (64.1) | 36,850 (68.8) | 34,100 (72.5) | 25,200 (75.0) | 21,000 (77.2) | | | |
| 25 | 22,250 (21.8) | 23,350 (47.5) | 23,900 (57.8) | 24,300 (63.6) | 24,650 (68.2) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 16,550 (37.3) | 17,050 (51.1) | 17,400 (58.3) | 17,600 (63.8) | 17,850 (67.8) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 12,150 (23.6) | 12,700 (43.7) | 13,000 (52.7) | 13,250 (59.3) | 13,450 (64.0) | 13,700 (67.8) | 13,950 (70.7) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 9700 (36.0) | 10,000 (47.3) | 10,200 (55.0) | 10,400 (60.4) | 10,600 (64.7) | 10,800 (67.8) | 11,000 (70.8) | 9600 (72.8) |
| 45 | | | 7600 (25.2) | 7900 (40.7) | 8150 (50.1) | 8300 (56.4) | 8350 (61.2) | 8500 (64.7) | 8650 (67.9) | 8850 (70.4) |
| 50 | | | | 6200 (33.0) | 6400 (44.8) | 6600 (52.1) | 6750 (57.6) | 6900 (61.5) | 7050 (65.1) | 7200 (67.8) |
| 55 | | | | 4850 (23.2) | 5100 (38.8) | 5250 (47.6) | 5400 (53.9) | 5500 (58.2) | 5650 (62.1) | 5800 (65.1) |
| 60 | | | | | 4000 (32.0) | 4150 (42.8) | 4300 (49.9) | 4400 (54.8) | 4550 (59.2) | 4650 (62.4) |
| 65 | | | | | 3100 (23.5) | 3250 (37.4) | 3400 (45.8) | 3500 (51.3) | 3600 (56.1) | 3700 (59.6) |
| 70 | | | | | 2300 (9.1) | 2500 (31.3) | 2600 (41.3) | 2700 (47.6) | 2800 (52.9) | 2900 (56.7) |
| 75 | | | | | | 1850 (23.8) | 1950 (36.4) | 2050 (43.7) | 2150 (49.6) | 2250 (53.8) |
| 80 | | | | | | 1250 (12.5) | 1400 (30.8) | 1500 (39.5) | 1600 (46.2) | 1650 (50.8) |
| 85 | | | | | | | 900 (24.1) | 1000 (34.8) | 1100 (42.5) | 1150 (47.6) |
| 90 | | | | | | | 500 (14.7) | 600 (29.5) | 650 (38.5) | 700 (44.3) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | 14 | 28 | 37 | 42 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | | | | 86 | | | |

NOTE: () Boom angles are in degrees.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|----------------|----------------|----------------|----------------|----------------|--|--|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | | | | |
| 0° | 17,950 (27.5) | 9950 (38.8) | 5850 (49.8) | 3750 (59.8) | 2200 (70.8) | 1050 (81.8) | | | | |

NOTE: () Reference radii in feet.

80059346

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 1361 kg (3000 lb) counterweight, 360°, outriggers 50% extended, (heavy lift)

| Radius in feet | **26 ft LENGTH | | 45 ft LENGTH | |
|--|----------------|----------------|----------------|----------------|
| | #1405 | #1407 | #1409 | #1411 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 25 | | | | |
| 30 | | | | |
| 35 | 5200 (77.1) | | | |
| 40 | 5200 (75.5) | | 3700 (77.3) | |
| 45 | 5200 (73.8) | | 3700 (75.8) | |
| 50 | 5200 (72.2) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.5) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 4450 (68.0) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 3500 (65.8) | 4750 (71.6) | 3700 (69.9) | 2500 (77.0) |
| 70 | 2650 (63.5) | 3750 (69.0) | 3700 (68.4) | 2500 (75.2) |
| 75 | 1950 (61.1) | 2850 (66.3) | 3000 (66.1) | 2500 (73.5) |
| 80 | 1350 (58.8) | 2150 (63.7) | 2300 (63.9) | 2500 (71.7) |
| 85 | 850 (56.3) | 1500 (61.1) | 1700 (61.7) | 2500 (69.8) |
| 90 | | 1000 (58.4) | 1250 (59.6) | 2400 (67.7) |
| 95 | | 500 (55.7) | 800 (57.3) | 1850 (65.1) |
| 100 | | | 450 (55.1) | 1350 (62.5) |
| 105 | | | | 900 (59.9) |
| 110 | | | | 500 (57.3) |
| Min. boom angle for indicated length (no load) | 55° | 56° | 55° | 57° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees.

80059354

#LMI operating code. Refer to LMI manual for instructions.

**26 ft capacities are applicable to both 26 ft fixed and 26 ft tele extension.

BOOM EXTENSION CAPACITY

NOTES:

1. All capacities above the bold line are based on structural strength limitations.
2. 26ft and 45ft extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.

4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only

Load chart

NBT60: 39,01 m (128 ft) boom, 1361 kg (3000 lb) counterweight, 360°, outriggers 0% extended, (heavy lift)

| Radius in feet | #1801 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|----------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 66,700 (68.0) | | | | | | | | | |
| 10 | 42,500 (64.0) | 43,700 (71.3) | | | | | | | | |
| 12 | 30,200 (59.8) | 31,250 (68.4) | 31,850 (73.2) | 32,300 (76.1) | | | | | | |
| 15 | 20,050 (53.1) | 21,000 (64.0) | 21,550 (69.7) | 21,900 (73.2) | 22,200 (76.0) | 22,550 (78.2) | | | | |
| 20 | 11,500 (40.2) | 12,400 (56.1) | 12,850 (63.8) | 13,150 (68.3) | 13,400 (71.9) | 13,650 (74.5) | 13,900 (76.7) | | | |
| 25 | 7150 (24.2) | 8000 (48.3) | 8450 (58.2) | 8550 (63.8) | 8750 (68.1) | 8950 (71.2) | 9100 (73.8) | 9300 (75.7) | 9500 (77.5) | |
| 30 | | 5150 (38.3) | 5600 (51.6) | 5850 (58.6) | 6050 (63.8) | 6200 (67.6) | 6400 (70.5) | 6500 (72.8) | 6700 (74.8) | 6800 (76.4) |
| 35 | | 3200 (25.2) | 3650 (44.3) | 3900 (53.1) | 4100 (59.4) | 4250 (63.8) | 4400 (67.3) | 4500 (69.8) | 4600 (72.1) | 4750 (73.9) |
| 40 | | | 2250 (35.9) | 2500 (47.1) | 2650 (54.7) | 2800 (59.9) | 2950 (63.9) | 3050 (66.8) | 3150 (69.4) | 3250 (71.4) |
| 45 | | | 1150 (25.1) | 1400 (40.5) | 1600 (49.8) | 1750 (55.9) | 1850 (60.5) | 1950 (63.7) | 2050 (66.6) | 2100 (68.8) |
| 50 | | | | 550 (32.8) | 750 (44.5) | 900 (51.7) | 1000 (56.9) | 1100 (60.6) | 1150 (63.8) | 1200 (66.3) |
| 55 | | | | | | | | | | 500 (63.6) |
| Minimum boom angle (°) for indicated length (no load) | | | 11 | 32 | 42 | 49 | 54 | 58 | 61 | 63 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | 43 | | | | | | | |

NOTE: () Boom angles are in degrees.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|----------------|--|--|--|--|--|--|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | | | | | | | | |
| 0° | 5750 (27.5) | 1950 (38.8) | | | | | | | | |

NOTE: () Reference radii in feet.

80059350

Load chart

NBT60: 39,01 m (128 ft) boom, 0 kg (0 lb) counterweight, 360°, outriggers 100% extended, (heavy lift)

| Radius in feet | #8001 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | T18-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64.0) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 69,750 (53.1) | 50,000 (64.1) | 50,000 (70.0) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 53,150 (40.3) | 50,000 (56.2) | 47,950 (64.2) | 41,500 (68.8) | 34,100 (72.5) | 25,200 (75.0) | 21,000 (77.2) | | | |
| 25 | 36,400 (21.8) | 43,800 (47.6) | 43,450 (58.0) | 37,150 (63.9) | 30,100 (68.4) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 31,900 (37.3) | 32,600 (51.3) | 33,000 (58.7) | 27,100 (64.2) | 20,400 (68.0) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 23,500 (23.6) | 24,150 (43.8) | 24,500 (53.0) | 24,600 (59.8) | 18,500 (64.3) | 16,300 (68.0) | 14,700 (70.8) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 18,700 (35.2) | 19,100 (47.0) | 19,400 (55.0) | 17,050 (60.5) | 15,100 (64.8) | 13,650 (68.0) | 12,050 (70.8) | 9600 (72.8) |
| 45 | | | 14,900 (24.0) | 15,250 (40.2) | 15,550 (50.0) | 15,750 (56.5) | 14,000 (61.5) | 12,550 (65.0) | 11,300 (68.2) | 9600 (70.6) |
| 50 | | | | 12,450 (32.4) | 12,700 (44.5) | 12,900 (52.2) | 12,850 (58.0) | 11,750 (62.0) | 10,650 (65.9) | 9600 (68.4) |
| 55 | | | | 10,350 (23.3) | 10,650 (39.2) | 10,850 (48.1) | 11,000 (54.6) | 10,950 (59.2) | 10,000 (63.2) | 8750 (66.0) |
| 60 | | | | | 8900 (32.3) | 9100 (43.2) | 9250 (50.6) | 9400 (55.8) | 9400 (60.4) | 7850 (63.4) |
| 65 | | | | | 7450 (23.8) | 7650 (37.9) | 7800 (46.4) | 7950 (52.2) | 8100 (57.3) | 7000 (60.7) |
| 70 | | | | | 6250 (9.3) | 6500 (31.7) | 6650 (41.9) | 6750 (48.5) | 6900 (54.1) | 6300 (57.9) |
| 75 | | | | | | 5500 (24.2) | 5650 (37.0) | 5750 (44.5) | 5900 (50.7) | 5700 (55.1) |
| 80 | | | | | | 4600 (12.9) | 4800 (31.4) | 4900 (40.3) | 5000 (47.2) | 5100 (52.1) |
| 85 | | | | | | | 4050 (24.7) | 4150 (35.6) | 4250 (43.5) | 4350 (48.9) |
| 90 | | | | | | | 3400 (15.2) | 3500 (30.3) | 3600 (39.5) | 3700 (45.5) |
| 95 | | | | | | | | 2950 (23.8) | 3050 (35.2) | 3150 (42.0) |
| 100 | | | | | | | | 2400 (14.8) | 2500 (30.2) | 2600 (38.1) |
| 105 | | | | | | | | | 2050 (24.4) | 2150 (33.9) |
| 110 | | | | | | | | | 1600 (16.5) | 1700 (29.2) |
| 115 | | | | | | | | | | 1300 (23.5) |
| 120 | | | | | | | | | | 950 (15.8) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | | | 3 | 11 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | | | | | | 107 | |

NOTE: (°) Boom angles are in degrees.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | | |
| 0° | 17,950 (27.5) | 10,000 (38.8) | 6,850 (49.8) | 6,100 (59.8) | 4,250 (70.8) | 2,850 (81.8) | 1,750 (92.8) | 800 (102.8) | | |

NOTE: (°) Reference radii in feet.

80059355

Load chart

NBT60: 39,01 m (128 ft) boom, 0 kg (0 lb) counterweight, over rear, outriggers 100% extended, (heavy lift)

| Radius in feet | #8003 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64.0) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 69,750 (53.1) | 50,000 (64.1) | 50,000 (70.0) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 53,150 (40.3) | 50,000 (56.2) | 47,950 (64.2) | 41,500 (68.8) | 34,100 (72.5) | 25,200 (75.0) | 21,000 (77.2) | | | |
| 25 | 36,400 (21.8) | 43,800 (47.6) | 43,450 (58.0) | 37,150 (63.9) | 30,100 (68.4) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 35,400 (37.4) | 36,600 (51.3) | 33,600 (58.7) | 27,100 (64.2) | 20,400 (68.0) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 26,350 (23.6) | 28,800 (43.9) | 29,150 (53.2) | 24,600 (59.8) | 18,500 (64.3) | 16,300 (68.0) | 14,700 (70.8) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 22,850 (35.3) | 23,200 (47.1) | 22,750 (55.2) | 17,050 (60.5) | 15,100 (64.8) | 13,650 (68.0) | 12,050 (70.8) | 9600 (72.8) |
| 45 | | | 18,650 (24.0) | 19,000 (40.3) | 19,250 (50.2) | 15,800 (56.5) | 14,000 (61.5) | 12,550 (65.0) | 11,300 (68.2) | 9600 (70.6) |
| 50 | | | | 15,800 (32.5) | 16,050 (44.7) | 14,600 (52.4) | 12,850 (58.0) | 11,750 (62.0) | 10,650 (65.9) | 9600 (68.4) |
| 55 | | | | 13,300 (22.2) | 13,600 (38.7) | 13,650 (47.9) | 12,000 (54.4) | 10,950 (59.2) | 10,000 (63.2) | 8750 (66.0) |
| 60 | | | | | 11,600 (31.7) | 11,800 (43.0) | 11,250 (50.9) | 10,300 (56.0) | 9400 (60.4) | 7850 (63.4) |
| 65 | | | | | 10,050 (23.9) | 10,250 (38.1) | 10,450 (46.8) | 9700 (52.6) | 8850 (57.5) | 7000 (60.7) |
| 70 | | | | | *7150 (9.4) | 8900 (32.0) | 9050 (42.3) | 9200 (49.0) | 8400 (54.5) | 6300 (57.9) |
| 75 | | | | | | 7750 (24.4) | 7900 (37.4) | 8050 (45.0) | 7950 (51.3) | 5700 (55.1) |
| 80 | | | | | | *6700 (13.1) | 6900 (31.8) | 7000 (40.8) | 7150 (47.9) | 5150 (52.1) |
| 85 | | | | | | | 6050 (25.0) | 6150 (36.1) | 6250 (44.2) | 4650 (49.0) |
| 90 | | | | | | | 5250 (15.5) | 5400 (30.7) | 5500 (40.2) | 4150 (45.7) |
| 95 | | | | | | | | 4700 (24.3) | 4850 (35.8) | 3700 (42.2) |
| 100 | | | | | | | | 4100 (15.2) | 4200 (30.8) | 3300 (38.4) |
| 105 | | | | | | | | | 3700 (25.0) | 3000 (34.3) |
| 110 | | | | | | | | | 3200 (17.1) | 2650 (29.6) |
| 115 | | | | | | | | | | 1900 (23.8) |
| 120 | | | | | | | | | | 1100 (15.9) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | | | 3 | 11 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | | | | | | 107 | |

NOTE: () Boom angles are in degrees.

*Loads are structurally limited.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | |
|--|--------------------------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|--|
| Boom angle | Main boom length in feet | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | |
| 0° | 17,950 (27.5) | 10,000 (38.8) | 6850 (49.8) | 6100 (59.8) | 4250 (70.8) | 2850 (81.8) | 1750 (92.8) | 800 (102.8) | |

NOTE: () Reference radii in feet.

80059359

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 0 kg (0 lb) counterweight, 360°, outriggers 100% extended, (heavy lift)

| Radius in feet | **26 ft LENGTH | | 45 ft LENGTH | |
|--|-----------------|-----------------|----------------|----------------|
| | #8005 | #8007 | #8009 | #8011 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 5200 (68.4) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 5200 (66.7) | 4800 (71.7) | 3700 (69.9) | 2500 (77.0) |
| 70 | 4850 (64.7) | 4650 (69.7) | 3700 (68.4) | 2500 (75.2) |
| 75 | 4500 (62.6) | 4400 (67.5) | 3700 (66.9) | 2500 (73.5) |
| 80 | 4250 (60.5) | 4150 (65.2) | 3700 (65.4) | 2500 (71.7) |
| 85 | 3950 (58.3) | 4000 (62.9) | 3700 (63.8) | 2500 (69.8) |
| 90 | 3550 (55.8) | 3,800 (60.5) | 3550 (61.9) | 2500 (67.9) |
| 95 | 2950 (53.2) | 3550 (57.8) | 3250 (59.9) | 2500 (65.9) |
| 100 | 2,400 (50.5) | 2950 (54.9) | 3000 (57.8) | 2500 (63.9) |
| 105 | 1950 (47.8) | 2400 (51.9) | 2700 (55.6) | 2450 (61.7) |
| 110 | 1500 (44.9) | 1900 (48.8) | 2400 (53.1) | 2400 (59.5) |
| 115 | 1150 (41.8) | 1450 (45.5) | 1950 (50.4) | 2350 (57.1) |
| 120 | 750 (38.6) | 1050 (42.0) | 1600 (47.9) | 2200 (54.4) |
| 125 | 450 (35.1) | 650 (38.2) | 1250 (45.2) | 1800 (51.4) |
| 130 | | | 950 (42.4) | 1400 (48.2) |
| 135 | | | 650 (39.5) | 1050 (44.9) |
| 140 | | | | 700 (41.3) |
| Min. boom angle for indicated length (no load) | 35° | 36° | 37° | 38° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees.

80059367

#LMI operating code. Refer to LMI manual for instructions.

**26 ft capacities are applicable to both 26 ft fixed and 26 ft telescopic extension.

BOOM EXTENSION CAPACITY NOTES:

1. All capacities above the bold line are based on structural strength limitations.
2. 26 ft and 45 ft extension lengths may be used for single line lifting service.

3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.

4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only.

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 0 kg (0 lb) counterweight, over rear, outriggers 100% extended, (heavy lift)

| Radius in feet | **26 ft LENGTH | | 45 ft LENGTH | |
|---|----------------|----------------|----------------|----------------|
| | #8006 | #8008 | #8010 | #8012 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 5200 (68.4) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 5200 (66.7) | 4800 (71.7) | 3700 (69.9) | 2500 (77.0) |
| 70 | 4850 (64.7) | 4650 (69.7) | 3700 (68.4) | 2500 (75.2) |
| 75 | 4500 (62.6) | 4400 (67.5) | 3700 (66.9) | 2500 (73.5) |
| 80 | 4250 (60.5) | 4150 (65.2) | 3700 (65.4) | 2500 (71.7) |
| 85 | 3950 (58.3) | 4000 (62.9) | 3700 (63.8) | 2500 (69.8) |
| 90 | 3800 (56.1) | 3800 (60.5) | 3550 (61.9) | 2500 (67.9) |
| 95 | 3650 (53.8) | 3650 (58.1) | 3250 (59.9) | 2500 (65.9) |
| 100 | 3150 (51.2) | 3350 (55.4) | 3000 (57.8) | 2500 (63.9) |
| 105 | 2600 (48.4) | 2900 (52.5) | 2700 (55.6) | 2450 (61.7) |
| 110 | 2100 (45.5) | 2550 (49.5) | 2500 (53.5) | 2400 (59.5) |
| 115 | 1700 (42.5) | 2150 (46.3) | 2300 (51.2) | 2350 (57.1) |
| 120 | 1350 (39.3) | 1650 (42.7) | 2050 (48.7) | 2300 (54.7) |
| 125 | 950 (35.8) | 1200 (38.9) | 1750 (46.0) | 2250 (52.1) |
| 130 | 650 (32.1) | 850 (34.8) | 1500 (43.3) | 2000 (49.1) |
| 135 | | 450 (30) | 1200 (40.4) | 1750 (45.9) |
| 140 | | | 900 (37.2) | 1350 (42.3) |
| 145 | | | 650 (33.9) | 900 (38.2) |
| 150 | | | | 600 (33.9) |
| Min. boom angle, for indicated length (no load) | 29° | 30° | 30° | 31° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees.

80059368

#LMI operating code. Refer to LMI manual for instructions.

**26 ft capacities are applicable to both 26 ft fixed and 26 ft telescopic extension.

BOOM EXTENSION CAPACITY NOTES:

1. All capacities above the bold line are based on structural strength limitations
2. 26 ft and 45 ft extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.

4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only.

Load chart

NBT60: 39,01 m (128 ft) boom, 0 kg (0 lb) counterweight, 360°, outriggers 50% extended, (heavy lift)

| Radius in feet | #8401 | | | | | | | | | |
|--|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|-----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64.0) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 56,050 (53.1) | 50,000 (64.1) | 50,000 (70.0) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 29,850 (40.2) | 31,000 (56.2) | 31,650 (64.0) | 32,100 (68.7) | 32,550 (72.4) | 25,200 (75.0) | 21,000 (77.2) | | | |
| 25 | 18,850 (21.8) | 19,950 (47.4) | 20,500 (57.7) | 20,850 (63.6) | 21,200 (68.1) | 21,500 (71.5) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 13,900 (37.2) | 14,400 (51.1) | 14,750 (58.3) | 15,000 (63.7) | 15,250 (67.7) | 15,550 (71.0) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 10,000 (25.2) | 10,550 (44.4) | 10,850 (53.3) | 11,100 (59.6) | 11,300 (63.9) | 11,500 (67.6) | 11,700 (70.4) | 11,950 (73.1) | 9600 (74.9) |
| 40 | | | 8000 (36.0) | 8300 (47.3) | 8400 (55.0) | 8550 (60.3) | 8750 (64.5) | 8900 (67.6) | 9100 (70.4) | 9600 (72.8) |
| 45 | | | 6000 (25.2) | 6300 (40.7) | 6550 (50.0) | 6700 (56.3) | 6900 (61.0) | 7050 (64.5) | 7200 (67.6) | 7350 (70.1) |
| 50 | | | | 4800 (33.0) | 5050 (44.7) | 5200 (52.0) | 5350 (57.4) | 5500 (61.3) | 5600 (64.8) | 5750 (67.4) |
| 55 | | | | 3600 (23.1) | 3850 (38.8) | 4000 (47.5) | 4150 (53.7) | 4250 (58.0) | 4350 (61.9) | 4500 (64.7) |
| 60 | | | | | 2850 (32.0) | 3000 (42.7) | 3150 (49.8) | 3250 (54.6) | 3350 (58.9) | 3450 (62.0) |
| 65 | | | | | 2050 (23.5) | 2200 (37.3) | 2350 (45.6) | 2450 (51.1) | 2550 (55.8) | 2650 (59.3) |
| 70 | | | | | 1350 (9.1) | 1550 (31.2) | 1650 (41.2) | 1750 (47.4) | 1850 (52.7) | 1,950 (56.4) |
| 75 | | | | | | 950 (23.7) | 1100 (36.3) | 1200 (43.5) | 1250 (49.4) | 1350 (53.5) |
| 80 | | | | | | | 600 (30.7) | 700 (39.3) | 750 (45.9) | 850 (50.5) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | 12 | 29 | 37 | 44 | 48 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | | | 75 | | | | |

NOTE: () Boom angles are in degrees.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|----------------|----------------|----------------|----------------|--|--|--|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | | | | | |
| 0° | 15,900 (27.5) | 7900 (38.8) | 4500 (49.8) | 2650 (59.8) | 1250 (70.8) | | | | | |

NOTE: () Reference radii in feet.

80059361

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 0 kg (0 lb) counterweight, 360°, outriggers 50% extended, (heavy lift)

| Radius in Feet | **26 ft LENGTH | | 45 ft LENGTH | |
|--|----------------|----------------|----------------|----------------|
| | #8405 | #8407 | #8409 | #8411 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 25 | | | | |
| 30 | | | | |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 4350 (69.8) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 3250 (67.5) | 4700 (73.5) | 3700 (71.4) | |
| 65 | 2400 (65.3) | 3550 (70.8) | 3500 (69.7) | 2500 (77.0) |
| 70 | 1650 (63.0) | 2600 (68.2) | 2550 (67.4) | 2500 (75.2) |
| 75 | 1050 (60.7) | 1900 (65.7) | 1900 (65.3) | 2500 (73.5) |
| 80 | 500 (58.3) | 1250 (63.1) | 1400 (63.3) | 2500 (71.7) |
| 85 | | 700 (60.5) | 900 (61.1) | 2050 (69.2) |
| 90 | | | 450 (59) | 1550 (66.7) |
| 95 | | | | 1050 (64.2) |
| 100 | | | | 600 (61.7) |
| Min. boom angle for indicated length (no load) | 58° | 60° | 59° | 61° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees.

80059369

#LMI operating code. Refer to LMI manual for instructions.

**26 ft capacities are applicable to both 26 ft fixed and 26 ft tele extension.

BOOM EXTENSION CAPACITY

NOTES:

1. All capacities above the bold line are based on structural strength limitations.
2. 26ft and 45ft extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.
4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only

Load chart

NBT60: 39,01 m (128 ft) boom, 0 kg (0 lb) counterweight, 360°, outriggers 0% extended, (heavy lift)

| Radius in feet | #8801 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|----------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 55,650 (68.0) | | | | | | | | | |
| 10 | 35,050 (64.0) | 36,250 (71.3) | | | | | | | | |
| 12 | 24,600 (59.8) | 25,700 (68.4) | 26,300 (73.1) | 26,650 (76.0) | | | | | | |
| 15 | 16,000 (53.1) | 16,950 (63.9) | 17,450 (69.7) | 17,750 (73.1) | 18,100 (75.9) | 18,350 (78.0) | | | | |
| 20 | 8700 (41.6) | 9550 (56.9) | 10,050 (64.4) | 10,300 (68.8) | 10,550 (72.2) | 10,800 (74.7) | 11,000 (76.8) | | | |
| 25 | 5000 (24.2) | 5850 (48.3) | 6300 (58.2) | 6550 (63.8) | 6800 (68.0) | 6,950 (71.1) | 7150 (73.6) | 7300 (75.5) | 7450 (77.3) | |
| 30 | | 3400 (38.3) | 3850 (51.6) | 4100 (58.6) | 4300 (63.7) | 4450 (67.5) | 4600 (70.4) | 4750 (72.6) | 4850 (74.6) | 5000 (76.1) |
| 35 | | 1750 (25.2) | 2200 (44.3) | 2450 (53.0) | 2650 (59.3) | 2750 (63.7) | 2900 (67.1) | 3000 (69.6) | 3100 (71.9) | 3200 (73.6) |
| 40 | | | 950 (35.9) | 1200 (47.1) | 1400 (54.7) | 1550 (59.9) | 1650 (63.8) | 1750 (66.6) | 1850 (69.2) | 1900 (71.1) |
| 45 | | | | | 500 (49.7) | 600 (55.8) | 750 (60.4) | 800 (63.6) | 900 (66.4) | 950 (68.6) |
| Minimum boom angle (°) for indicated length (no load) | | | 31 | 42 | 49 | 55 | 59 | 62 | 65 | 67 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | 43 | | | | | | | |

NOTE: () Boom angles are in degrees.

#LMI operating code. Refer to LMI manual for operating instructions.


| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|---------------|--|--|--|--|--|--|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | | | | | | | | |
| 0° | 3800 (27.5) | 700 (38.8) | | | | | | | | |

NOTE: () Reference radii in feet.

80059365

Working range

NBT60: 39,0 m (128 ft boom) with 7,9 m - 13,7 m (26 ft - 45 ft) extension (minimum truck)

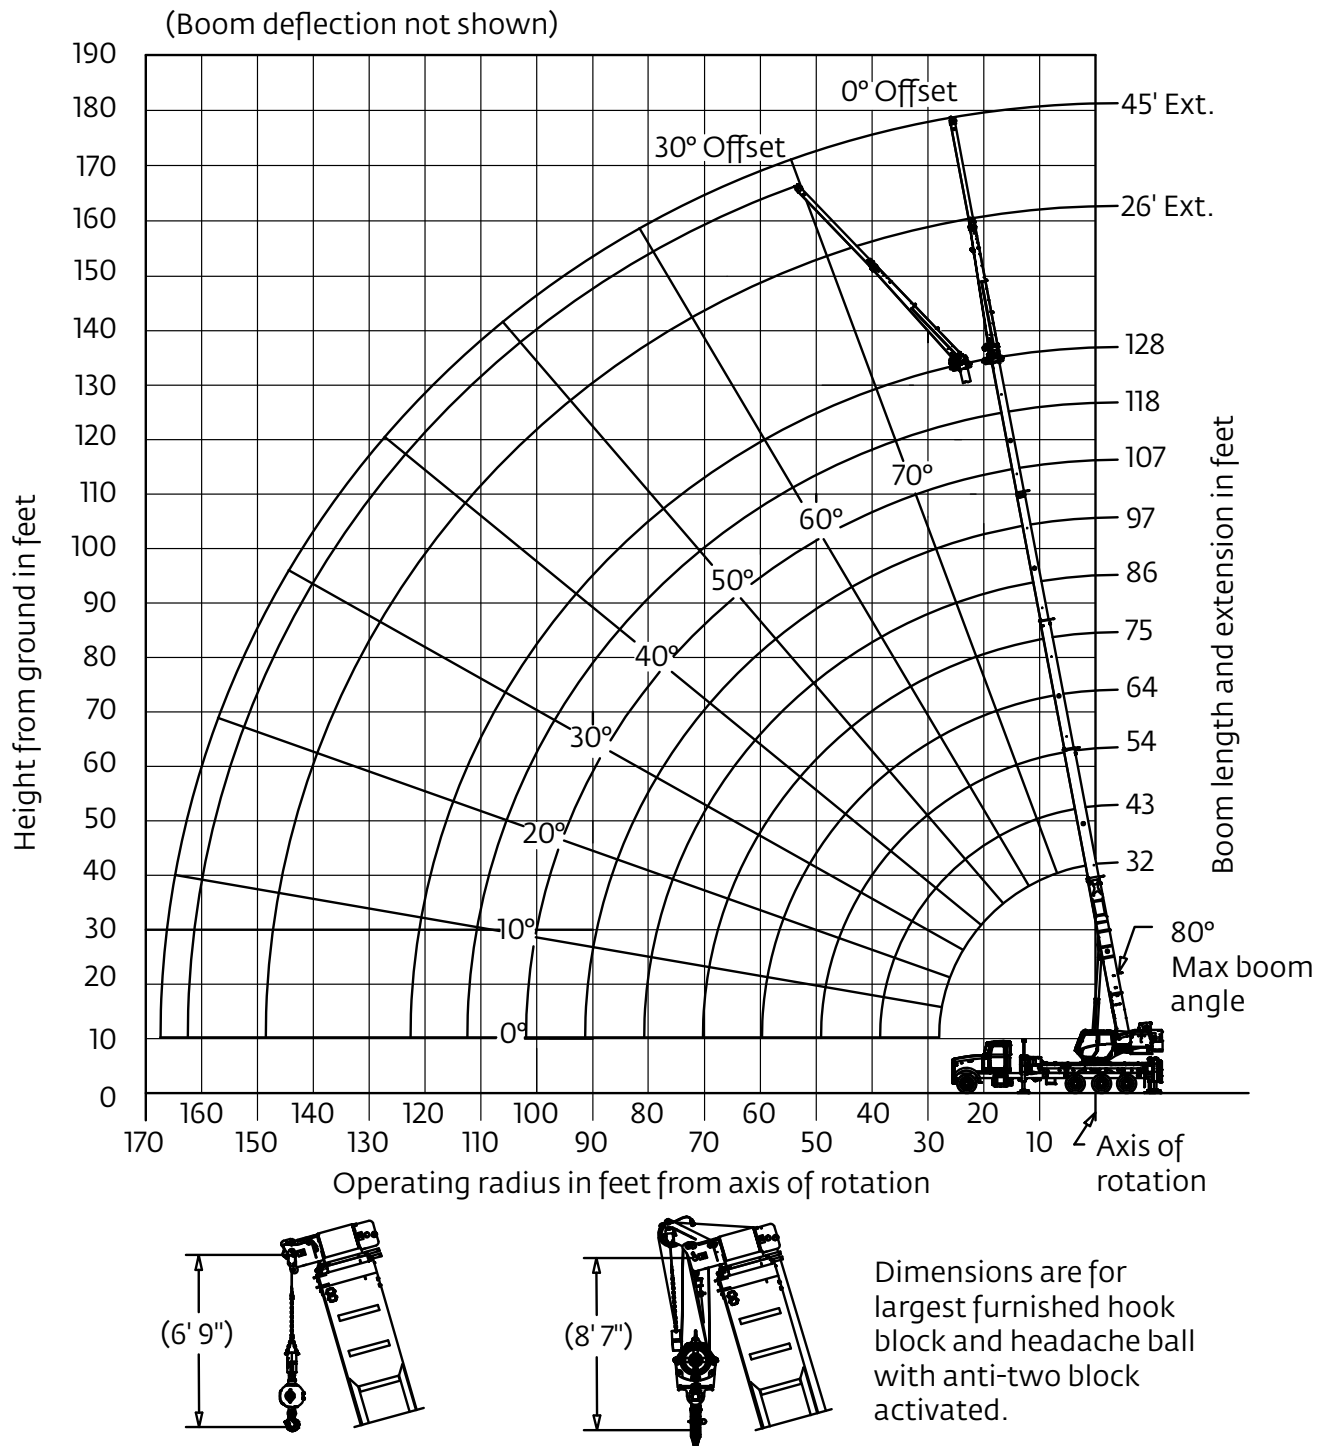

*This drawing shows the physical reach of the machine. Always refer to the load chart to see which portions of this diagram are valid for the specific machine configuration and where the loads are structurally or stability limited.

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load chart

NBT60: 39,01 m (128 ft) boom, 2722 kg (6000 lb) counterweight, 360°, outriggers 100% extended, (minimum truck)

| Radius in feet | #0001 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 69,750 (53.1) | 50,000 (64.1) | 50,000 (70) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 53,150 (40.3) | 50,000 (56.2) | 47,950 (64.2) | 41,500 (68.8) | 34,100 (72.5) | 25,200 (75) | 21,000 (77.2) | | | |
| 25 | 36,400 (21.8) | 43,800 (47.6) | 43,450 (58) | 37,150 (63.9) | 30,100 (68.4) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 35,400 (37.4) | 36,600 (51.3) | 33,600 (58.7) | 27,100 (64.2) | 20,400 (68) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 26,350 (23.6) | 28,100 (43.9) | 28,500 (53.1) | 24,600 (59.8) | 18,500 (64.3) | 16,300 (68) | 14,700 (70.8) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 22,000 (35.2) | 22,350 (47) | 22,600 (55.2) | 17,050 (60.5) | 15,100 (64.8) | 13,650 (68) | 12,050 (70.8) | 9600 (72.8) |
| 45 | | | 17,700 (24) | 18,050 (40.3) | 18,300 (50.1) | 15,800 (56.5) | 14,000 (61.5) | 12,550 (65) | 11,300 (68.2) | 9600 (70.6) |
| 50 | | | | 14,850 (32.4) | 15,100 (44.7) | 14,600 (52.4) | 12,850 (58) | 11,750 (62) | 10,650 (65.9) | 9600 (68.4) |
| 55 | | | | 12,400 (22.2) | 12,650 (38.7) | 12,850 (47.8) | 12,000 (54.4) | 10,950 (59.2) | 10,000 (63.2) | 8750 (66) |
| 60 | | | | | 10,800 (32.4) | 11,000 (43.4) | 11,050 (50.9) | 10,300 (56) | 9400 (60.4) | 7850 (63.4) |
| 65 | | | | | 9200 (23.9) | 9400 (38) | 9600 (46.7) | 9700 (52.6) | 8850 (57.5) | 7000 (60.7) |
| 70 | | | | | *7150 (9.4) | 8050 (31.9) | 8250 (42.2) | 8400 (48.8) | 8400 (54.5) | 6300 (57.9) |
| 75 | | | | | | 6950 (24.3) | 7100 (37.3) | 7250 (44.9) | 7400 (51.2) | 5700 (55.1) |
| 80 | | | | | | 6000 (13) | 6150 (31.7) | 6250 (40.6) | 6400 (47.6) | 5150 (52.1) |
| 85 | | | | | | | 5300 (24.9) | 5450 (35.9) | 5550 (43.9) | 4650 (49) |
| 90 | | | | | | | 4600 (15.4) | 4700 (30.6) | 4800 (39.9) | 4150 (45.7) |
| 95 | | | | | | | | 4050 (24.1) | 4150 (35.6) | 3700 (42.2) |
| 100 | | | | | | | | 3500 (15.1) | 3600 (30.6) | 3300 (38.4) |
| 105 | | | | | | | | | 3100 (24.8) | 3000 (34.3) |
| 110 | | | | | | | | | 2600 (16.9) | 2650 (29.6) |
| 115 | | | | | | | | | | 1900 (23.8) |
| 120 | | | | | | | | | | 1100 (15.9) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | | | 3 | 11 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | | | | | | 1 07 | |

NOTE: () Boom angles are in degrees.

*Loads are structurally limited.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting Capacities at Zero Degree Boom Angle | | | | | | | | | |
|--|--------------------------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|--|
| Boom Angle | Main Boom Length in Feet | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | |
| 0° | 17,950 (27.5) | 10,000 (38.8) | 6850 (49.8) | 6100 (59.8) | 4250 (70.8) | 2850 (81.8) | 1750 (92.8) | 800 (102.8) | |

NOTE: () Reference radii in feet.

80060367

Load chart

NBT60: 39,01 m (128 ft) boom, 2722 kg (6000 lb) counterweight, over rear, outriggers 100% extended, (minimum truck)

| Radius in feet | #0003 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 69,750 (53.1) | 50,000 (64.1) | 50,000 (70) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 53,150 (40.3) | 50,000 (56.2) | 47,950 (64.2) | 41,500 (68.8) | 34,100 (72.5) | 25,200 (75) | 21,000 (77.2) | | | |
| 25 | 36,400 (21.8) | 43,800 (47.6) | 43,450 (58) | 37,150 (63.9) | 30,100 (68.4) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 35,400 (37.4) | 36,600 (51.3) | 33,600 (58.7) | 27,100 (64.2) | 20,400 (68) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 26,350 (23.6) | 29,400 (43.9) | 29,750 (53.2) | 24,600 (59.8) | 18,500 (64.3) | 16,300 (68) | 14,700 (70.8) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 23,350 (35.3) | 23,700 (47.1) | 22,750 (55.2) | 17,050 (60.5) | 15,100 (64.8) | 13,650 (68) | 12,050 (70.8) | 9600 (72.8) |
| 45 | | | 19,100 (24.1) | 19,400 (40.3) | 19,700 (50.2) | 15,800 (56.5) | 14,000 (61.5) | 12,550 (65) | 11,300 (68.2) | 9600 (70.6) |
| 50 | | | | 16,200 (32.5) | 16,450 (44.7) | 14,600 (52.4) | 12,850 (58) | 11,750 (62) | 10,650 (65.9) | 9600 (68.4) |
| 55 | | | | 13,650 (22.2) | 13,900 (38.7) | 13,650 (47.9) | 12,000 (54.4) | 10,950 (59.2) | 10,000 (63.2) | 8750 (66) |
| 60 | | | | | 11,900 (31.8) | 12,100 (43) | 11,250 (50.9) | 10,300 (56) | 9400 (60.4) | 7850 (63.4) |
| 65 | | | | | 10,350 (24) | 10,550 (38.1) | 10,600 (46.8) | 9700 (52.6) | 8850 (57.5) | 7000 (60.7) |
| 70 | | | | | *7150 (9.4) | 9150 (32) | 9300 (42.4) | 9200 (49) | 8400 (54.5) | 6300 (57.9) |
| 75 | | | | | | 7950 (24.4) | 8100 (37.4) | 8250 (45.1) | 7950 (51.3) | 5700 (55.1) |
| 80 | | | | | | *6700 (13.1) | 7,100 (31.8) | 7250 (40.8) | 7350 (47.9) | 5150 (52.1) |
| 85 | | | | | | | 6250 (25.1) | 6350 (36.1) | 6500 (44.2) | 4650 (49) |
| 90 | | | | | | | 5450 (15.6) | 5600 (30.8) | 5700 (40.2) | 4150 (45.7) |
| 95 | | | | | | | | 4900 (24.3) | 5000 (35.8) | 3700 (42.2) |
| 100 | | | | | | | | 4250 (15.2) | 4400 (30.9) | 3300 (38.4) |
| 105 | | | | | | | | | 3,850 (25) | 3000 (34.3) |
| 110 | | | | | | | | | 3350 (17.1) | 2650 (29.6) |
| 115 | | | | | | | | | | 1900 (23.8) |
| 120 | | | | | | | | | | 1100 (15.9) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | | | 3 | 11 |
| Maximum boom length (ft.) at 0° boom angle (no load) | | | | | | | | | 107 | |

NOTE: () Boom angles are in degrees.

*Loads are structurally limited.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | |
|--|--------------------------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|--|
| Boom angle | Main boom length in feet | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | |
| 0° | 17,950 (27.5) | 10,000 (38.8) | 6850 (49.8) | 6100 (59.8) | 4250 (70.8) | 2850 (81.8) | 1750 (92.8) | 800 (102.8) | |

NOTE: () Reference radii in feet.

80060371

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 2722 kg (6000 lb) counterweight, 360°, outriggers 100% extended, (minimum truck)

| Radius in feet | **26 ft LENGTH | | 45 ft LENGTH | |
|--|----------------|----------------|----------------|----------------|
| | #0005 | #0007 | #0009 | #0011 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 5200 (68.4) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 5200 (66.7) | 4800 (71.7) | 3700 (69.9) | 2500 (77) |
| 70 | 4850 (64.7) | 4650 (69.7) | 3700 (68.4) | 2500 (75.2) |
| 75 | 4500 (62.6) | 4400 (67.5) | 3700 (66.9) | 2500 (73.5) |
| 80 | 4250 (60.5) | 4150 (65.2) | 3700 (65.4) | 2500 (71.7) |
| 85 | 3950 (58.3) | 4000 (62.9) | 3700 (63.8) | 2500 (69.8) |
| 90 | 3800 (56.1) | 3800 (60.5) | 3550 (61.9) | 2500 (67.9) |
| 95 | 3650 (53.8) | 3650 (58.1) | 3250 (59.9) | 2500 (65.9) |
| 100 | 3150 (51.2) | 3350 (55.4) | 3000 (57.8) | 2500 (63.9) |
| 105 | 2600 (48.4) | 2900 (52.5) | 2700 (55.6) | 2450 (61.7) |
| 110 | 2100 (45.5) | 2550 (49.5) | 2500 (53.5) | 2400 (59.5) |
| 115 | 1700 (42.5) | 2150 (46.3) | 2300 (51.2) | 2350 (57.1) |
| 120 | 1350 (39.3) | 1650 (42.7) | 2050 (48.7) | 2300 (54.7) |
| 125 | 950 (35.8) | 1200 (38.9) | 1750 (46) | 2250 (52.1) |
| 130 | 650 (32.1) | 850 (34.8) | 1500 (43.3) | 2000 (49.1) |
| 135 | | 450 (30) | 1200 (40.4) | 1750 (45.9) |
| 140 | | | 900 (37.2) | 1350 (42.3) |
| 145 | | | 650 (33.9) | 900 (38.2) |
| 150 | | | | 600 (33.9) |
| Min. boom angle for indicated length (no load) | 29° | 30° | 30° | 31° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees.

80060379

#LMI operating code. Refer to LMI manual for instructions.

**26 ft capacities are applicable to both 26 ft fixed and 26 ft tele extension.

BOOM EXTENSION CAPACITY NOTES:

1. All capacities above the bold line are based on structural strength limitations.
2. 26 ft and 45 ft extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.
4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only.

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 2722 kg (6000 lb) counterweight, over rear, outriggers 100% extended, (minimum truck)

| Radius in feet | 26 ft LENGTH | | 45 ft LENGTH | |
|--|-----------------|----------------|----------------|----------------|
| | #0006 | #0008 | #0010 | #0012 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 5200 (68.4) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 5,200 (66.7) | 4800 (71.7) | 3700 (69.9) | 2500 (77) |
| 70 | 4850 (64.7) | 4650 (69.7) | 3700 (68.4) | 2500 (75.2) |
| 75 | 4500 (62.6) | 4400 (67.5) | 3700 (66.9) | 2500 (73.5) |
| 80 | 4250 (60.5) | 4150 (65.2) | 3700 (65.4) | 2500 (71.7) |
| 85 | 3950 (58.3) | 4000 (62.9) | 3700 (63.8) | 2500 (69.8) |
| 90 | 3800 (56.1) | 3800 (60.5) | 3550 (61.9) | 2500 (67.9) |
| 95 | 3650 (53.8) | 3650 (58.1) | 3250 (59.9) | 2500 (65.9) |
| 100 | 3,150 (51.2) | 3350 (55.4) | 3000 (57.8) | 2500 (63.9) |
| 105 | 2600 (48.4) | 2900 (52.5) | 2700 (55.6) | 2450 (61.7) |
| 110 | 2100 (45.5) | 2550 (49.5) | 2500 (53.5) | 2400 (59.5) |
| 115 | 1700 (42.5) | 2150 (46.3) | 2300 (51.2) | 2350 (57.1) |
| 120 | 1350 (39.3) | 1650 (42.7) | 2050 (48.7) | 2300 (54.7) |
| 125 | 950 (35.8) | 1200 (38.9) | 1750 (46) | 2250 (52.1) |
| 130 | 650 (32.1) | 850 (34.8) | 1500 (43.3) | 2000 (49.1) |
| 135 | | 450 (30) | 1200 (40.4) | 1750 (45.9) |
| 140 | | | 900 (37.2) | 1350 (42.3) |
| 145 | | | 650 (33.9) | 900 (38.2) |
| 150 | | | | 600 (33.9) |
| Min. boom angle for indicated length (no load) | 29° | 30° | 30° | 31° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees.

80060380

#LMI operating code. Refer to LMI manual for instructions.

26 ft capacities are applicable to both 26 ft fixed and 26 ft tele extension.

BOOM EXTENSION CAPACITY NOTES:

1. All capacities above the bold line are based on structural strength limitations
2. 26 ft and 45 ft extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.
4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only.

Load chart

NBT60: 39,01 m (128 ft) boom, 2722 kg (6000 lb) counterweight, 360°, outriggers 50% extended, (minimum truck)

| Radius in feet | #0401 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 67,050 (53.1) | 50,000 (64.1) | 50,000 (70) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 36,250 (40.2) | 37,400 (56.2) | 38,050 (64.1) | 38,500 (68.8) | 34,100 (72.5) | 25,200 (75) | 21,000 (77.2) | | | |
| 25 | 23,450 (21.8) | 24,500 (47.5) | 25,100 (57.8) | 25,450 (63.7) | 25,800 (68.2) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 17,450 (37.3) | 17,900 (51.1) | 18,250 (58.3) | 18,500 (63.8) | 18,750 (67.9) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 12,900 (23.6) | 13,450 (43.7) | 13,750 (52.8) | 14,000 (59.3) | 14,200 (64) | 14,450 (67.9) | 14,700 (70.8) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 10,300 (36) | 10,600 (47.3) | 10,850 (55.1) | 11,050 (60.5) | 11,250 (64.7) | 11,450 (67.7) | 11,650 (70.7) | 9600 (72.8) |
| 45 | | | 8150 (25.2) | 8450 (40.7) | 8550 (50.1) | 8700 (56.4) | 8900 (61.2) | 9050 (64.8) | 9250 (68) | 9600 (70.6) |
| 50 | | | | 6650 (33) | 6900 (44.8) | 7050 (52.2) | 7250 (57.6) | 7400 (61.6) | 7550 (65.2) | 7700 (67.9) |
| 55 | | | | 5250 (23.2) | 5500 (38.9) | 5650 (47.7) | 5800 (53.9) | 5950 (58.3) | 6100 (62.3) | 6200 (65.2) |
| 60 | | | | | 4350 (32.1) | 4550 (42.8) | 4700 (50) | 4800 (54.9) | 4900 (59.3) | 5050 (62.5) |
| 65 | | | | | 3450 (23.5) | 3600 (37.5) | 3750 (45.8) | 3850 (51.4) | 3950 (56.2) | 4050 (59.7) |
| 70 | | | | | 2600 (9.1) | 2800 (31.3) | 2950 (41.4) | 3050 (47.7) | 3150 (53) | 3250 (56.9) |
| 75 | | | | | | 2150 (23.9) | 2250 (36.5) | 2350 (43.8) | 2450 (49.7) | 2550 (53.9) |
| 80 | | | | | | 1550 (12.6) | 1700 (30.9) | 1800 (39.5) | 1850 (46.2) | 1950 (50.9) |
| 85 | | | | | | | 1200 (24.2) | 1250 (34.9) | 1350 (42.6) | 1450 (47.7) |
| 90 | | | | | | | 750 (14.8) | 850 (29.6) | 900 (38.6) | 950 (44.4) |
| 95 | | | | | | | | | 500 (34.3) | 550 (40.9) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | | 23 | 34 | 40 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | | | | | 97 | | |

NOTE: () Boom angles are in degrees.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|------------------|----------------|----------------|----------------|----------------|---------------|--|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | | | |
| 0° | 17,950 (27.5) | 10,000 (38.8) | 6350 (49.8) | 4150 (59.8) | 2500 (70.8) | 1350 (81.8) | 500 (92.8) | | | |

NOTE: () Reference radii in feet.

80060373

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 2722 kg (6000 lb) counterweight, 360°, outriggers 50% extended, (minimum truck)

| Radius in feet | **26 ft LENGTH | | 45 ft LENGTH | |
|--|----------------|----------------|----------------|----------------|
| | #0405 | #0407 | #0409 | #0411 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 4900 (68.2) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 3900 (65.9) | 4800 (71.7) | 3700 (69.9) | 2500 (77) |
| 70 | 3000 (63.6) | 4100 (69.2) | 3700 (68.4) | 2500 (75.2) |
| 75 | 2300 (61.3) | 3200 (66.5) | 3350 (66.4) | 2500 (73.5) |
| 80 | 1650 (58.9) | 2450 (63.9) | 2650 (64.2) | 2500 (71.7) |
| 85 | 1150 (56.5) | 1800 (61.3) | 2050 (62) | 2500 (69.8) |
| 90 | 650 (54) | 1250 (58.6) | 1550 (59.8) | 2500 (67.9) |
| 95 | | 750 (55.9) | 1100 (57.6) | 2100 (65.4) |
| 100 | | | 700 (55.3) | 1600 (62.8) |
| 105 | | | | 1150 (60.2) |
| 110 | | | | 750 (57.5) |
| Min. boom angle for indicated length (no load) | 53° | 54° | 54° | 56° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees. 80060381

#LMI operating code. Refer to LMI manual for instructions.

**26 ft capacities are applicable to both 26 ft fixed and 26ft tele extension.

BOOM EXTENSION CAPACITY

NOTES:

1. All capacities above the bold line are based on structural strength limitations.
2. 26 ft and 45 ft extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.
4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only

Load chart

NBT60: 39,01 m (128 ft) boom, 2722 kg (6000 lb) counterweight, 360°, outriggers 0% extended, (minimum truck)

| Radius in feet | #0801 | | | | | | | | | |
|---|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|-------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 72,600 (68) | | | | | | | | | |
| 10 | 46,400 (64) | 47,600 (71.4) | | | | | | | | |
| 12 | 33,200 (59.8) | 34,250 (68.4) | 34,900 (73.2) | 35,350 (76.2) | | | | | | |
| 15 | 22,250 (53.1) | 23,200 (64) | 23,700 (69.8) | 24,100 (73.2) | 24,450 (76.1) | 24,750 (78.3) | | | | |
| 20 | 13,000 (40.2) | 13,900 (56.1) | 14,350 (63.8) | 14,650 (68.4) | 14,950 (71.9) | 15,150 (74.6) | 15,450 (76.8) | | | |
| 25 | 8300 (24.2) | 9000 (48.3) | 9450 (58.3) | 9700 (63.8) | 9900 (68.1) | 10,100 (71.3) | 10,300 (73.8) | 10,500 (75.8) | 10,750 (77.7) | |
| 30 | | 6100 (38.3) | 6550 (51.6) | 6800 (58.6) | 7000 (63.8) | 7150 (67.6) | 7350 (70.6) | 7500 (72.9) | 7650 (75) | 7800 (76.6) |
| 35 | | 3950 (25.2) | 4450 (44.3) | 4700 (53.1) | 4900 (59.4) | 5050 (63.9) | 5150 (67.3) | 5300 (69.9) | 5450 (72.2) | 5550 (74) |
| 40 | | | 2900 (35.9) | 3150 (47.1) | 3350 (54.7) | 3500 (60) | 3600 (64) | 3750 (66.9) | 3850 (69.5) | 3950 (71.5) |
| 45 | | | 1750 (25.1) | 2000 (40.5) | 2200 (49.8) | 2350 (56) | 2450 (60.5) | 2550 (63.8) | 2650 (66.8) | 2700 (69) |
| 50 | | | | 1100 (32.9) | 1300 (44.5) | 1400 (51.7) | 1550 (57) | 1600 (60.7) | 1700 (64) | 1750 (66.4) |
| 55 | | | | | 550 (38.6) | 700 (47.3) | 800 (53.3) | 850 (57.4) | 950 (61.1) | 1000 (63.8) |
| Minimum boom angle (°) for indicated length (no load) | | | | 25 | 38 | 46 | 52 | 56 | 59 | 62 |
| Maximum boom length (ft.) at 0° boom angle (no load) | | | | 54 | | | | | | |

NOTE: () Boom angles are in degrees.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|-------------|------------|--|--|--|--|--|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | | | | | | | |
| 0° | 6800 (27.5) | 2650 (38.8) | 800 (49.8) | | | | | | | |

NOTE: () Reference radii in feet.

80060377

Load chart

NBT60: 39,01 m (128 ft) boom, 1361 kg (3000 lb) counterweight, 360°, outriggers 100% extended, (minimum truck)

| Radius in feet | #1001 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|-----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 69,750 (53.1) | 50,000 (64.1) | 50,000 (70) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 53,150 (40.3) | 50,000 (56.2) | 47,950 (64.2) | 41,500 (68.8) | 34,100 (72.5) | 25,200 (75) | 21,000 (77.2) | | | |
| 25 | 36,400 (21.8) | 43,800 (47.6) | 43,450 (58) | 37,150 (63.9) | 30,100 (68.4) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 33,650 (37.3) | 34,250 (51.3) | 33,600 (58.7) | 27,100 (64.2) | 20,400 (68) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 24,850 (23.6) | 25,500 (43.9) | 25,850 (53.1) | 24,600 (59.8) | 18,500 (64.3) | 16,300 (68) | 14,700 (70.8) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 19,850 (35.2) | 20,200 (47) | 20,500 (55.1) | 17,050 (60.5) | 15,100 (64.8) | 13,650 (68) | 12,050 (70.8) | 9600 (72.8) |
| 45 | | | 15,850 (24) | 16,200 (40.2) | 16,500 (50) | 15,800 (56.5) | 14,000 (61.5) | 12,550 (65) | 11,300 (68.2) | 9600 (70.6) |
| 50 | | | | 13,250 (32.4) | 13,500 (44.6) | 13,700 (52.3) | 12,850 (58) | 11,750 (62) | 10,650 (65.9) | 9600 (68.4) |
| 55 | | | | 11,000 (23.3) | 11,250 (39.2) | 11,450 (47.7) | 11,600 (54.3) | 10,950 (59.2) | 10,000 (63.2) | 8750 (66) |
| 60 | | | | | 9550 (32.4) | 9750 (43.3) | 9900 (50.7) | 10,100 (55.9) | 9400 (60.4) | 7850 (63.4) |
| 65 | | | | | 8050 (23.8) | 8250 (37.9) | 8450 (46.5) | 8550 (52.3) | 8750 (57.5) | 7000 (60.7) |
| 70 | | | | | 6800 (9.3) | 7050 (31.8) | 7200 (42) | 7300 (48.6) | 7450 (54.2) | 6300 (57.9) |
| 75 | | | | | | 6000 (24.2) | 6150 (37.1) | 6250 (44.6) | 6400 (50.9) | 5700 (55.1) |
| 80 | | | | | | 5100 (12.9) | 5250 (31.5) | 5350 (40.4) | 5500 (47.4) | 5150 (52.1) |
| 85 | | | | | | | 4500 (24.8) | 4600 (35.7) | 4700 (43.6) | 4650 (49) |
| 90 | | | | | | | 3800 (15.3) | 3900 (30.4) | 4050 (39.7) | 4100 (45.7) |
| 95 | | | | | | | | 3350 (23.9) | 3450 (35.3) | 3500 (42.1) |
| 100 | | | | | | | | 2800 (14.9) | 2900 (30.4) | 3000 (38.3) |
| 105 | | | | | | | | | 2400 (24.5) | 2500 (34.1) |
| 110 | | | | | | | | | 2000 (16.7) | 2100 (29.3) |
| 115 | | | | | | | | | | 1700 (23.7) |
| 120 | | | | | | | | | | *1100 (15.8) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | | | 3 | 11 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | | | | | | 107 | |

NOTE: () Boom angles are in degrees.

*Loads are structurally limited.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | | |
| 0° | 17,950 (27.5) | 10,000 (38.8) | 6850 (49.8) | 6100 (59.8) | 4250 (70.8) | 2850 (81.8) | 1750 (92.8) | 800 (102.8) | | |

NOTE: () Reference radii in feet.

80060382

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load chart

NBT60: 39,01 m (128 ft) boom, 1361 kg (3000 lb) counterweight, over rear, outriggers 100% extended, (minimum truck)

| Radius in feet | #1003 | | | | | | | | | |
|---|--------------------------|-------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 69,750 (53.1) | 50,000 (64.1) | 50,000 (70) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 53,150 (40.3) | 50,000 (56.2) | 47,950 (64.2) | 41,500 (68.8) | 34,100 (72.5) | 25,200 (75) | 21,000 (77.2) | | | |
| 25 | 36,400 (21.8) | 43,800 (47.6) | 43,450 (58) | 37,150 (63.9) | 30,100 (68.4) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 35,000 (37.4) | 35,600 (51.3) | 33,600 (58.7) | 27,100 (64.2) | 20,400 (68) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | *26,350 (23.6) | 27,100 (43.9) | 27,450 (53.1) | 24,600 (59.8) | 18,500 (64.3) | 16,300 (68) | 14,700 (70.8) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 21,500 (35.2) | 21,850 (47) | 22,150 (55.1) | 17,050 (60.5) | 15,100 (64.8) | 13,650 (68) | 12,050 (70.8) | 9600 (72.8) |
| 45 | | | 17,450 (24) | 17,800 (40.3) | 18,050 (50.1) | 15,800 (56.5) | 14,000 (61.5) | 12,550 (65) | 11,300 (68.2) | 9600 (70.6) |
| 50 | | | | 14,750 (32.4) | 15,000 (44.7) | 14,600 (52.4) | 12,850 (58) | 11,750 (62) | 10,650 (65.9) | 9600 (68.4) |
| 55 | | | | 12,400 (22.2) | 12,650 (38.7) | 12,850 (47.8) | 12,000 (54.4) | 10,950 (59.2) | 10,000 (63.2) | 8750 (66) |
| 60 | | | | | 10,850 (32.4) | 11,050 (43.4) | 11,250 (50.9) | 10,300 (56) | 9400 (60.4) | 7850 (63.4) |
| 65 | | | | | 9300 (23.9) | 9500 (38) | 9650 (46.7) | 9700 (52.6) | 8850 (57.5) | 7000 (60.7) |
| 70 | | | | | *7150 (9.4) | 8200 (31.9) | 8350 (42.2) | 8500 (48.9) | 8400 (54.5) | 6300 (57.9) |
| 75 | | | | | | 7100 (24.4) | 7250 (37.3) | 7350 (44.9) | 7500 (51.2) | 5700 (55.1) |
| 80 | | | | | | 6100 (13) | 6300 (31.7) | 6400 (40.6) | 6550 (47.7) | 5150 (52.1) |
| 85 | | | | | | | 5450 (24.9) | 5600 (35.9) | 5700 (44) | 4650 (49) |
| 90 | | | | | | | 4750 (15.4) | 4850 (30.6) | 4950 (40) | 4150 (45.7) |
| 95 | | | | | | | | 4200 (24.2) | 4350 (35.6) | 3700 (42.2) |
| 100 | | | | | | | | 3650 (15.1) | 3750 (30.7) | 3300 (38.4) |
| 105 | | | | | | | | | 3250 (24.8) | 3000 (34.3) |
| 110 | | | | | | | | | 2750 (16.9) | 2650 (29.6) |
| 115 | | | | | | | | | | 1900 (23.8) |
| 120 | | | | | | | | | | 1100 (15.9) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | | | 3 | 11 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | | | | | | 107 | |

NOTE: () Boom angles are in degrees.

*Loads are structurally limited.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | | |
| 0° | 17,950 (27.5) | 10,000 (38.8) | 6850 (49.8) | 6100 (59.8) | 4250 (70.8) | 2850 (81.8) | 1750 (92.8) | 800 (102.8) | | |

NOTE: () Reference radii in feet.

80060386

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 1361 kg (3000 lb) counterweight, 360°, outriggers 100% extended, (minimum truck)

| Radius in feet | 26 ft LENGTH | | 45 ft LENGTH | |
|--|----------------|----------------|-----------------|----------------|
| | #1005 | #1007 | #1009 | #1011 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 5200 (68.4) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 5200 (66.7) | 4800 (71.7) | 3700 (69.9) | 2500 (77) |
| 70 | 4850 (64.7) | 4650 (69.7) | 3700 (68.4) | 2500 (75.2) |
| 75 | 4500 (62.6) | 4400 (67.5) | 3700 (66.9) | 2500 (73.5) |
| 80 | 4250 (60.5) | 4150 (65.2) | 3700 (65.4) | 2500 (71.7) |
| 85 | 3950 (58.3) | 4000 (62.9) | 3700 (63.8) | 2500 (69.8) |
| 90 | 3800 (56.1) | 3800 (60.5) | 3550 (61.9) | 2500 (67.9) |
| 95 | 3350 (53.4) | 3650 (58.1) | 3250 (59.9) | 2500 (65.9) |
| 100 | 2800 (50.8) | 3300 (55.2) | 3000 (57.8) | 2500 (63.9) |
| 105 | 2300 (48) | 2750 (52.2) | 2700 (55.6) | 2450 (61.7) |
| 110 | 1850 (45.1) | 2250 (49) | 2,500 (53.5) | 2400 (59.5) |
| 115 | 1450 (42.1) | 1800 (45.7) | 2300 (51.2) | 2350 (57.1) |
| 120 | 1100 (38.8) | 1350 (42.2) | 1900 (48.2) | 2300 (54.7) |
| 125 | 750 (35.4) | 1000 (38.5) | 1550 (45.5) | 2100 (51.7) |
| 130 | 450 (31.6) | 650 (34.2) | 1250 (42.8) | 1700 (48.5) |
| 135 | | | 950 (39.8) | 1350 (45.2) |
| 140 | | | 700 (36.7) | 1000 (41.6) |
| 145 | | | 450 (33.3) | 700 (37.7) |
| Min. boom angle for indicated length (no load) | 31° | 32° | 33° | 34° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees.

80060394

#LMI operating code. Refer to LMI manual for instructions.

**26 ft capacities are applicable to both 26 ft fixed and 26 ft tele extension.

BOOM EXTENSION CAPACITY NOTES:

1. All capacities above the bold line are based on structural strength limitations.
2. 26 ft and 45 ft extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.
4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only.

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 1361 kg (3000 lb) counterweight, over rear, outriggers 100% extended, (minimum truck)

| Radius in feet | °°26 ft LENGTH | | 45 ft LENGTH | |
|--|----------------|----------------|----------------|-----------------|
| | #1006 | #1008 | #1010 | #1012 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 5200 (68.4) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 5200 (66.7) | 4800 (71.7) | 3700 (69.9) | 2500 (77) |
| 70 | 4850 (64.7) | 4650 (69.7) | 3700 (68.4) | 2500 (75.2) |
| 75 | 4500 (62.6) | 4400 (67.5) | 3700 (66.9) | 2500 (73.5) |
| 80 | 4250 (60.5) | 4150 (65.2) | 3700 (65.4) | 2500 (71.7) |
| 85 | 3950 (58.3) | 4000 (62.9) | 3700 (63.8) | 2500 (69.8) |
| 90 | 3800 (56.1) | 3800 (60.5) | 3550 (61.9) | 2500 (67.9) |
| 95 | 3650 (53.8) | 3650 (58.1) | 3250 (59.9) | 2500 (65.9) |
| 100 | 3150 (51.2) | 3350 (55.4) | 3000 (57.8) | 2,500 (63.9) |
| 105 | 2600 (48.4) | 2900 (52.5) | 2700 (55.6) | 2450 (61.7) |
| 110 | 2100 (45.5) | 2550 (49.5) | 2500 (53.5) | 2400 (59.5) |
| 115 | 1700 (42.5) | 2150 (46.3) | 2300 (51.2) | 2,350 (57.1) |
| 120 | 1350 (39.3) | 1650 (42.7) | 2050 (48.7) | 2300 (54.7) |
| 125 | 950 (35.8) | 1200 (38.9) | 1750 (46) | 2250 (52.1) |
| 130 | 650 (32.1) | 850 (34.8) | 1500 (43.3) | 2000 (49.1) |
| 135 | | 450 (30) | 1200 (40.4) | 1750 (45.9) |
| 140 | | | 900 (37.2) | 1350 (42.3) |
| 145 | | | 650 (33.9) | 900 (38.2) |
| 150 | | | | 600 (33.9) |
| Min. boom angle for indicated length (no load) | 29° | 30° | 30° | 31° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees.

80060395

#LMI operating code. Refer to LMI manual for instructions.

°°26 ft capacities are applicable to both 26 ft fixed and 26 ft telescopic extension.

BOOM EXTENSION CAPACITY NOTES:

1. All capacities above the bold line are based on structural strength limitations
2. 26ft and 45ft extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.
4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are without outriggers properly extended and vertical jacks set only.

Load chart

NBT60: 39,01 m (128 ft) boom, 1361 kg (3000 lb) counterweight, 360°, outriggers 50% extended, (minimum truck)

| Radius in feet | #1401 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 60,400 (53.1) | 50,000 (64.1) | 50,000 (70) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 32,400 (40.2) | 33,550 (56.2) | 34,200 (64) | 34,650 (68.7) | 34,100 (72.5) | 25,200 (75) | 21,000 (77.2) | | | |
| 25 | 20,650 (21.8) | 21,750 (47.4) | 22,300 (57.8) | 22,650 (63.6) | 23,000 (68.1) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 15,300 (37.2) | 15,800 (51.1) | 16,150 (58.3) | 16,450 (63.8) | 16,700 (67.8) | 16,950 (71.1) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 11,150 (25.2) | 11,700 (43.7) | 12,000 (52.7) | 12,250 (59.3) | 12,450 (63.9) | 12,700 (67.7) | 12,900 (70.6) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 8850 (36) | 9150 (47.3) | 9350 (55) | 9550 (60.4) | 9750 (64.6) | 9900 (67.7) | 10,100 (70.6) | 9600 (72.8) |
| 45 | | | 6850 (25.2) | 7150 (40.7) | 7400 (50.1) | 7550 (56.3) | 7750 (61.1) | 7900 (64.6) | 8050 (67.8) | 8600 (70.4) |
| 50 | | | | 5550 (33) | 5750 (44.7) | 5950 (52.1) | 6100 (57.5) | 6250 (61.4) | 6400 (64.9) | 7000 (67.7) |
| 55 | | | | 4250 (23.1) | 4500 (38.8) | 4650 (47.6) | 4800 (53.8) | 4900 (58.1) | 5050 (62) | 5600 (65) |
| 60 | | | | | 3450 (32) | 3600 (42.7) | 3750 (49.9) | 3850 (54.7) | 4000 (59) | 4450 (62.3) |
| 65 | | | | | 2600 (23.5) | 2750 (37.4) | 2900 (45.7) | 3000 (51.2) | 3100 (56) | 3550 (59.5) |
| 70 | | | | | 1850 (9.1) | 2050 (31.3) | 2150 (41.2) | 2250 (47.5) | 2350 (52.8) | 2750 (56.7) |
| 75 | | | | | | 1450 (23.8) | 1550 (36.3) | 1650 (43.6) | 1750 (49.5) | 2100 (53.8) |
| 80 | | | | | | 900 (12.5) | 1000 (30.8) | 1100 (39.4) | 1200 (46) | 1550 (50.7) |
| 85 | | | | | | | 550 (24.1) | 650 (34.7) | 750 (42.4) | 1050 (47.6) |
| 90 | | | | | | | | | | 600 (44.2) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | 22 | 33 | 40 | 44 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | | | | 86 | | | |

NOTE: () Boom angles are in degrees.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|----------------|----------------|----------------|----------------|---------------|--|--|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | | | | |
| 0° | 17,500 (27.5) | 9050 (38.8) | 5200 (49.8) | 3200 (59.8) | 1750 (70.8) | 700 (81.8) | | | | |

NOTE: () Reference radii in feet.

80060388

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 1361 kg (3000 lb) counterweight, 360°, outriggers 50% extended, (minimum truck)

| Radius in feet | **26 ft LENGTH | | 45 ft LENGTH | |
|--|----------------|----------------|----------------|----------------|
| | #1405 | #1407 | #1409 | #1411 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (77.1) | | | |
| 40 | 5200 (75.5) | | 3700 (77.3) | |
| 45 | 5200 (73.8) | | 3700 (75.8) | |
| 50 | 5200 (72.2) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5050 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 3900 (67.8) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 3000 (65.5) | 4200 (71.2) | 3700 (69.9) | 2500 (77) |
| 70 | 2200 (63.2) | 3200 (68.6) | 3250 (67.9) | 2500 (75.2) |
| 75 | 1550 (60.9) | 2400 (66) | 2550 (65.8) | 2500 (73.5) |
| 80 | 950 (58.5) | 1750 (63.5) | 1850 (63.6) | 2500 (71.7) |
| 85 | 500 (56.1) | 1150 (60.8) | 1350 (61.5) | 2500 (69.8) |
| 90 | | 650 (58.2) | 900 (59.3) | 2050 (67.3) |
| 95 | | | 500 (57.1) | 1500 (64.7) |
| 100 | | | | 1000 (62.1) |
| 105 | | | | 600 (59.6) |
| Min. boom angle for indicated length (no load) | 56° | 58° | 57° | 59° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees. 80060396

#LMI operating code. Refer to LMI manual for instructions.

**26 ft capacities are applicable to both 26 ft fixed and 26 ft tele extension.

BOOM EXTENSION CAPACITY NOTES:

1. All capacities above the bold line are based on structural strength limitations.
2. 26ft and 45ft extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.
4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only

Load chart

NBT60: 39,01 m (128 ft) boom, 1361 kg (3000 lb) counterweight, 360°, outriggers 0% extended, (minimum truck)

| Radius in feet | #1801 | | | | | | | | | |
|--|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|----------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 63,400 (68) | | | | | | | | | |
| 10 | 40,250 (64) | 41,450 (71.3) | | | | | | | | |
| 12 | 28,500 (59.8) | 29,550 (68.4) | 30,200 (73.2) | 30,650 (76.1) | | | | | | |
| 15 | 18,850 (53.1) | 19,750 (63.9) | 20,300 (69.7) | 20,650 (73.2) | 21,000 (76) | 21,300 (78.1) | | | | |
| 20 | 10,700 (41.6) | 11,550 (56.1) | 12,000 (63.8) | 12,300 (68.3) | 12,550 (71.8) | 12,800 (74.5) | 13,050 (76.7) | | | |
| 25 | 6500 (24.2) | 7350 (48.3) | 7800 (58.2) | 8100 (63.8) | 8300 (68.1) | 8300 (71.2) | 8450 (73.7) | 8650 (75.6) | 8850 (77.4) | |
| 30 | | 4650 (38.3) | 5100 (51.6) | 5350 (58.6) | 5550 (63.8) | 5700 (67.5) | 5850 (70.5) | 6000 (72.7) | 6150 (74.8) | 6300 (76.3) |
| 35 | | 2750 (25.2) | 3200 (44.3) | 3450 (53.1) | 3650 (59.3) | 3800 (63.8) | 3950 (67.2) | 4050 (69.7) | 4150 (72) | 4300 (73.8) |
| 40 | | | 1850 (35.9) | 2100 (47.1) | 2300 (54.7) | 2450 (59.9) | 2550 (63.9) | 2650 (66.7) | 2750 (69.3) | 2850 (71.3) |
| 45 | | | 800 (25.1) | 1100 (40.5) | 1250 (49.8) | 1400 (55.9) | 1500 (60.4) | 1600 (63.7) | 1700 (66.6) | 1750 (68.7) |
| 50 | | | | | | 600 (51.7) | 700 (56.9) | 800 (60.5) | 850 (63.8) | 900 (66.2) |
| Minimum boom angle (°) for indicated length (no load) | | | 19 | 35 | 45 | 51 | 56 | 59 | 62 | 65 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | 43 | | | | | | | |

NOTE: () Boom angles are in degrees.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|-----------------|--|--|--|--|--|--|--|--|
| Boom angle | Main boom length in Feet | | | | | | | | | |
| | 31.7 | 43-A | | | | | | | | |
| 0° | 5,150 (27.5) | 1,600 (38.8) | | | | | | | | |

NOTE: () Reference radii in feet.

80060392

Load chart

NBT60: 39,01 m (128 ft) boom, 0 kg (0 lb) counterweight, 360°, outriggers 100% extended, (minimum truck)

| Radius in feet | #8001 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 69,750 (53.1) | 50,000 (64.1) | 50,000 (70) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 53,150 (40.3) | 50,000 (56.2) | 47,950 (64.2) | 41,500 (68.8) | 34,100 (72.5) | 25,200 (75) | 21,000 (77.2) | | | |
| 25 | 36,400 (21.8) | 43,400 (47.6) | 43,450 (58) | 37,150 (63.9) | 30,100 (68.4) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 29,550 (37.3) | 30,250 (51.3) | 30,650 (58.6) | 27,100 (64.2) | 20,400 (68) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 21,700 (23.6) | 22,350 (43.8) | 22,650 (53) | 23,000 (59.7) | 18,500 (64.3) | 16,300 (68) | 14,700 (70.8) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 17,200 (35.2) | 17,600 (46.9) | 17,850 (54.9) | 17,050 (60.5) | 15,100 (64.8) | 13,650 (68) | 12,050 (70.8) | 9600 (72.8) |
| 45 | | | 13,650 (24) | 14,000 (40.2) | 14,250 (49.9) | 14,450 (56.4) | 14,000 (61.5) | 12,550 (65) | 11,300 (68.2) | 9600 (70.6) |
| 50 | | | | 11,300 (32.3) | 11,600 (44.5) | 11,750 (52.1) | 11,950 (57.9) | 11,750 (62) | 10,650 (65.9) | 9600 (68.4) |
| 55 | | | | 9400 (23.3) | 9650 (39.1) | 9850 (48) | 10,050 (54.5) | 10,200 (59.1) | 10,000 (63.2) | 8750 (66) |
| 60 | | | | | 8000 (32.3) | 8200 (43.1) | 8350 (50.5) | 8500 (55.6) | 8700 (60.2) | 7850 (63.4) |
| 65 | | | | | 6650 (23.7) | 6850 (37.8) | 7000 (46.3) | 7150 (52.1) | 7300 (57.1) | 7000 (60.7) |
| 70 | | | | | 5550 (9.3) | 5750 (31.6) | 5900 (41.8) | 6050 (48.3) | 6150 (53.9) | 6300 (57.9) |
| 75 | | | | | | 4800 (24.1) | 4950 (36.9) | 5100 (44.4) | 5200 (50.5) | 5300 (54.9) |
| 80 | | | | | | 4000 (12.8) | 4150 (31.3) | 4300 (40.1) | 4400 (47) | 4500 (51.9) |
| 85 | | | | | | | 3450 (24.6) | 3600 (35.4) | 3700 (43.3) | 3750 (48.6) |
| 90 | | | | | | | 2850 (15.1) | 2950 (30.1) | 3050 (39.3) | 3150 (45.3) |
| 95 | | | | | | | | 2450 (23.7) | 2550 (35) | 2600 (41.7) |
| 100 | | | | | | | | 1950 (14.7) | 2050 (30.1) | 2150 (37.9) |
| 105 | | | | | | | | | 1650 (24.2) | 1700 (33.7) |
| 110 | | | | | | | | | 1250 (16.4) | 1300 (29) |
| 115 | | | | | | | | | | 950 (23.3) |
| 120 | | | | | | | | | | 650 (15.7) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | | | 3 | 11 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | | | | | | 107 | |

NOTE: () Boom angles are in degrees.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | |
|--|--------------------------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|--|
| Boom angle | Main boom length in feet | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | |
| 0° | 17,950 (27.5) | 10,000 (38.8) | 6850 (49.8) | 6100 (59.8) | 4250 (70.8) | 2850 (81.8) | 1750 (92.8) | 800 (102.8) | |

NOTE: () Reference radii in feet.

80060397

Load chart

NBT60: 39,01 m (128 ft) boom, 0 kg (0 lb) counterweight, over rear, outriggers 100% extended, (minimum truck)

| Radius in feet | #8003 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|-----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 69,750 (53.1) | 50,000 (64.1) | 50,000 (70) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 53,150 (40.3) | 50,000 (56.2) | 47,950 (64.2) | 41,500 (68.8) | 34,100 (72.5) | 25,200 (75) | 21,000 (77.2) | | | |
| 25 | 36,400 (21.8) | 43,800 (47.6) | 43,450 (58) | 37,150 (63.9) | 30,100 (68.4) | 22,650 (71.6) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 31,550 (37.3) | 32,150 (51.3) | 32,550 (58.7) | 27,100 (64.2) | 20,400 (68) | 17,800 (71.2) | 15,750 (73.5) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 23,750 (23.6) | 24,350 (43.8) | 24,700 (53) | 24,600 (59.8) | 18,500 (64.3) | 16,300 (68) | 14,700 (70.8) | 12,900 (73.2) | 9600 (74.9) |
| 40 | | | 19,200 (35.2) | 19,500 (47) | 19,800 (55) | 17,050 (60.5) | 15,100 (64.8) | 13,650 (68) | 12,050 (70.8) | 9600 (72.8) |
| 45 | | | 15,450 (24) | 15,800 (40.2) | 16,050 (50) | 15,800 (56.5) | 14,000 (61.5) | 12,550 (65) | 11,300 (68.2) | 9600 (70.6) |
| 50 | | | | 13,000 (32.4) | 13,250 (44.6) | 13,450 (52.3) | 12,850 (58) | 11,750 (62) | 10,650 (65.9) | 9600 (68.4) |
| 55 | | | | 10,950 (23.3) | 11,200 (39.2) | 11,300 (47.7) | 11,450 (54.3) | 10,950 (59.2) | 10,000 (63.2) | 8750 (66) |
| 60 | | | | | 9500 (32.4) | 9650 (43.3) | 9850 (50.7) | 10,000 (55.9) | 9400 (60.4) | 7850 (63.4) |
| 65 | | | | | 8050 (23.8) | 8250 (37.9) | 8400 (46.5) | 8550 (52.3) | 8700 (57.5) | 7000 (60.7) |
| 70 | | | | | 6800 (9.3) | 7050 (31.8) | 7200 (42) | 7300 (48.6) | 7450 (54.2) | 6300 (57.9) |
| 75 | | | | | | 6000 (24.2) | 6200 (37.1) | 6300 (44.6) | 6400 (50.9) | 5700 (55.1) |
| 80 | | | | | | 5150 (12.9) | 5300 (31.5) | 5400 (40.4) | 5550 (47.4) | 5150 (52.1) |
| 85 | | | | | | | 4550 (24.8) | 4650 (35.7) | 4750 (43.7) | 4650 (49) |
| 90 | | | | | | | 3850 (15.3) | 4000 (30.4) | 4100 (39.7) | 4150 (45.7) |
| 95 | | | | | | | | 3400 (24) | 3500 (35.3) | 3600 (42.2) |
| 100 | | | | | | | | 2850 (14.9) | 3000 (30.4) | 3050 (38.3) |
| 105 | | | | | | | | | 2500 (24.6) | 2600 (34.1) |
| 110 | | | | | | | | | 2100 (16.7) | 2150 (29.4) |
| 115 | | | | | | | | | | 1750 (23.7) |
| 120 | | | | | | | | | | *1100 (15.9) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | | | | 3 | 11 |
| Maximum boom length (ft.) at 0° boom angle (no load) | | | | | | | | | 107 | |

NOTE: () Boom angles are in degrees.

*Loads are structurally limited.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | |
|--|--------------------------|------------------|----------------|----------------|----------------|----------------|----------------|----------------|--|
| Boom angle | Main boom length in feet | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | |
| 0° | 17,950 (27.5) | 10,000 (38.8) | 6850 (49.8) | 6100 (59.8) | 4250 (70.8) | 2850 (81.8) | 1750 (92.8) | 800 (102.8) | |

NOTE: () Reference radii in feet.

80060401

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE.

The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 0 kg (0 lb) counterweight, 360°, outriggers 100% extended, (minimum truck)

| Radius in feet | **26 ft LENGTH | | 45 ft LENGTH | |
|--|----------------|----------------|----------------|----------------|
| | #8005 | #8007 | #8009 | #8011 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 5200 (68.4) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 5200 (66.7) | 4800 (71.7) | 3700 (69.9) | 2500 (77) |
| 70 | 4850 (64.7) | 4650 (69.7) | 3700 (68.4) | 2500 (75.2) |
| 75 | 4500 (62.6) | 4400 (67.5) | 3700 (66.9) | 2500 (73.5) |
| 80 | 4250 (60.5) | 4150 (65.2) | 3700 (65.4) | 2500 (71.7) |
| 85 | 3650 (57.9) | 4000 (62.9) | 3700 (63.8) | 2500 (69.8) |
| 90 | 3000 (55.4) | 3650 (60.2) | 3550 (61.9) | 2500 (67.9) |
| 95 | 2400 (52.8) | 3000 (57.4) | 3250 (59.9) | 2500 (65.9) |
| 100 | 1900 (50.2) | 2450 (54.6) | 2800 (57.5) | 2500 (63.9) |
| 105 | 1450 (47.4) | 1900 (51.6) | 2300 (54.9) | 2450 (61.7) |
| 110 | 1050 (44.5) | 1450 (48.5) | 1900 (52.5) | 2400 (59.5) |
| 115 | 700 (41.5) | 1050 (45.2) | 1500 (50) | 2200 (56.8) |
| 120 | | 650 (41.7) | 1150 (47.4) | 1800 (53.9) |
| 125 | | | 850 (44.8) | 1400 (51) |
| 130 | | | 550 (42) | 1050 (47.8) |
| 135 | | | | 700 (44.5) |
| Min. boom angle for indicated length (no load) | 39° | 40° | 41° | 42° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees.

80060409

#LMI operating code. Refer to LMI manual for instructions.

**26 ft capacities are applicable to both 26 ft fixed and 26 ft tele extension.

BOOM EXTENSION CAPACITY NOTES:

1. All capacities above the bold line are based on structural strength limitations.
2. 26 ft. and 45 ft. extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.
4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only.

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 0 kg (0 lb) counterweight, over rear, outriggers 100% extended, (minimum truck)

| Radius in feet | 26 ft LENGTH | | 45 ft LENGTH | |
|--|----------------|----------------|----------------|----------------|
| | #8006 | #8008 | #8010 | #8012 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 5200 (71.9) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 5200 (70.1) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 5200 (68.4) | 4800 (73.7) | 3700 (71.4) | |
| 65 | 5200 (66.7) | 4800 (71.7) | 3700 (69.9) | 2500 (77) |
| 70 | 4850 (64.7) | 4650 (69.7) | 3700 (68.4) | 2500 (75.2) |
| 75 | 4500 (62.6) | 4400 (67.5) | 3700 (66.9) | 2500 (73.5) |
| 80 | 4250 (60.5) | 4150 (65.2) | 3700 (65.4) | 2500 (71.7) |
| 85 | 3950 (58.3) | 4000 (62.9) | 3700 (63.8) | 2500 (69.8) |
| 90 | 3800 (56.1) | 3800 (60.5) | 3550 (61.9) | 2500 (67.9) |
| 95 | 3400 (53.5) | 3650 (58.1) | 3250 (59.9) | 2500 (65.9) |
| 100 | 2850 (50.8) | 3300 (55.2) | 3000 (57.8) | 2500 (63.9) |
| 105 | 2350 (48) | 2750 (52.2) | 2700 (55.6) | 2450 (61.7) |
| 110 | 1900 (45.1) | 2300 (49.1) | 2500 (53.5) | 2400 (59.5) |
| 115 | 1550 (42.1) | 1850 (45.8) | 2300 (51.2) | 2350 (57.1) |
| 120 | 1150 (38.9) | 1450 (42.3) | 1950 (48.3) | 2300 (54.7) |
| 125 | 850 (35.4) | 1050 (38.5) | 1600 (45.6) | 2150 (51.7) |
| 130 | 550 (31.6) | 700 (34.3) | 1300 (42.8) | 1750 (48.6) |
| 135 | | | 1000 (39.9) | 1400 (45.3) |
| 140 | | | 750 (36.8) | 1050 (41.6) |
| 145 | | | 500 (33.4) | 750 (37.8) |
| 150 | | | | 450 (33.4) |
| Min. boom angle for indicated length (no load) | 30° | 31° | 33° | 33° |
| Max. boom length at 0° boom angle (no load) | 64 ft | | 64 ft | |

NOTE: () Boom angles are in degrees.

80060410

#LMI operating code. Refer to LMI manual for instructions.

26 ft capacities are applicable to both 26 ft fixed and 26 ft telescopic extension.

BOOM EXTENSION CAPACITY NOTES:

1. All capacities above the bold line are based on structural strength limitations
2. 26 ft and 45 ft extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.

4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only.

Load chart

NBT60: 39,01 m (128 ft) boom, 0 kg (0 lb) counterweight, 360°, outriggers 50% extended, (minimum truck)

| Radius in feet | #8401 | | | | | | | | | |
|---|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|----------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 120,000 (68.1) | | | | | | | | | |
| 10 | 94,150 (64) | 50,000 (71.4) | | | | | | | | |
| 12 | 82,850 (59.8) | 50,000 (68.5) | 50,000 (73.3) | 49,550 (76.4) | | | | | | |
| 15 | 52,350 (53.1) | 50,000 (64.1) | 50,000 (70) | 46,500 (73.6) | 39,300 (76.4) | 27,200 (78.3) | | | | |
| 20 | 27,650 (40.2) | 28,800 (56.2) | 29,450 (64) | 29,850 (68.6) | 30,300 (72.3) | 25,200 (75) | 21,000 (77.2) | | | |
| 25 | 17,300 (21.8) | 18,400 (47.4) | 18,950 (57.7) | 19,300 (63.5) | 19,600 (68) | 19,900 (71.4) | 19,400 (74.2) | 16,900 (76.2) | 13,350 (77.8) | |
| 30 | | 12,700 (37.2) | 13,200 (51) | 13,550 (58.2) | 13,800 (63.7) | 14,050 (67.6) | 14,300 (70.9) | 14,550 (73.4) | 13,350 (75.6) | 9600 (76.9) |
| 35 | | 9050 (25.2) | 9550 (44.4) | 9850 (53.2) | 10,100 (59.6) | 10,300 (64.2) | 10,500 (67.8) | 10,700 (70.5) | 10,950 (73.1) | 9600 (74.9) |
| 40 | | | 7200 (36) | 7450 (47.3) | 7700 (54.9) | 7900 (60.3) | 8050 (64.4) | 8250 (67.5) | 8450 (70.3) | 9600 (72.8) |
| 45 | | | 5300 (25.2) | 5600 (40.6) | 5850 (50) | 6000 (56.2) | 6150 (60.9) | 6300 (64.4) | 6450 (67.5) | 6600 (69.9) |
| 50 | | | | 4200 (33) | 4400 (44.6) | 4550 (52) | 4700 (57.3) | 4850 (61.2) | 4950 (64.6) | 5100 (67.2) |
| 55 | | | | 3050 (23.1) | 3250 (38.7) | 3450 (47.5) | 3550 (53.6) | 3700 (57.9) | 3800 (61.7) | 3900 (64.6) |
| 60 | | | | | 2350 (31.9) | 2500 (42.6) | 2650 (49.7) | 2750 (54.5) | 2850 (58.8) | 2950 (61.9) |
| 65 | | | | | 1600 (23.4) | 1750 (37.3) | 1900 (45.6) | 1950 (51) | 2050 (55.7) | 2150 (59.1) |
| 70 | | | | | 950 (9.1) | 1100 (31.2) | 1250 (41.1) | 1350 (47.3) | 1400 (52.5) | 1500 (56.3) |
| 75 | | | | | | 550 (23.7) | 700 (36.2) | 800 (43.4) | 850 (49.2) | 950 (53.4) |
| Minimum boom angle (°) for indicated length (no load) | | | | | | 21 | 34 | 41 | 47 | 51 |
| Maximum boom length (ft) at 0° boom angle (no load) | | | | | | 75 | | | | |

NOTE: () Boom angles are in degrees.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|----------------|----------------|----------------|---------------|--|--|--|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | | | | | |
| 0° | 14,500 (27.5) | 7050 (38.8) | 3850 (49.8) | 2100 (59.8) | 850 (70.8) | | | | | |

NOTE: () Reference radii in feet.

80060403

Load chart

NBT60: 7,9 m (26 ft) fixed and 7,9 m - 13,7 m (26 ft - 45 ft) offsettable extension, 0 kg (0 lb) counterweight, 360°, outriggers 50% extended, (minimum truck)

| Radius in feet | **26 ft LENGTH | | 45 ft LENGTH | |
|--|----------------|----------------|----------------|----------------|
| | #8405 | #8407 | #8409 | #8411 |
| | 0° OFFSET | 30° OFFSET | 0° OFFSET | 30° OFFSET |
| 35 | 5200 (76.9) | | | |
| 40 | 5200 (75.3) | | 3700 (77.3) | |
| 45 | 5200 (73.6) | | 3700 (75.8) | |
| 50 | 4950 (71.8) | 4800 (77.4) | 3700 (74.4) | |
| 55 | 3750 (69.6) | 4800 (75.6) | 3700 (72.9) | |
| 60 | 2700 (67.3) | 4100 (73.1) | 3700 (71.4) | |
| 65 | 1900 (65.1) | 3000 (70.5) | 2900 (69.3) | 2500 (77) |
| 70 | 1200 (62.8) | 2200 (68) | 2150 (67.2) | 2500 (75.2) |
| 75 | 600 (60.4) | 1450 (65.4) | 1500 (65) | 2500 (73.5) |
| 80 | | 850 (62.9) | 1000 (63) | 2400 (71.4) |
| 85 | | | 500 (60.8) | 1750 (68.9) |
| 90 | | | | 1200 (66.4) |
| 95 | | | | 750 (63.9) |
| Min. boom angle for indicated length (no load) | 60° | 61° | 60° | 63° |
| Max. boom length at 0° boom angle (no load) | 54 ft | | 54 ft | |

NOTE: () Boom angles are in degrees.

80060411

#LMI operating code. Refer to LMI manual for instructions.

**26 ft capacities are applicable to both 26 ft fixed and 26 ft telescopic extension.

BOOM EXTENSION CAPACITY

NOTES:

1. All capacities above the bold line are based on structural strength limitations.
2. 26ft and 45ft extension lengths may be used for single line lifting service.
3. Radii listed are for a fully extended boom with the boom extension erected. For main boom lengths less than fully extended, the rated loads are determined by boom angle. Use only the column which corresponds to the boom extension length and offset for which the machine is configured. For boom angles not shown, use the rating of the next lower boom angle.

WARNING: Operation of this machine with heavier loads than the capacities listed is strictly prohibited. Machine tipping with boom extension occurs rapidly and without advance warning.
4. Boom angle is the angle above or below horizontal of the longitudinal axis of the boom base section after lifting rated load.
5. Capacities listed are with outriggers properly extended and vertical jacks set only

Load chart

NBT60: 39,01 m (128 ft) boom, 0 kg (0 lb) counterweight, 360°, outriggers 0% extended, (minimum truck)

| Radius in Feet | #8801 | | | | | | | | | |
|---|--------------------------|---------------|---------------|---------------|---------------|-------------|---------------|-------------|-------------|-------------|
| | Main boom length in feet | | | | | | | | | |
| | 31.7 | 43-A | 54-B | 64-C | 75-D | 86-E | 97-F | 107-G | 118-H | 128 |
| 8 | 52,400 (68) | | | | | | | | | |
| 10 | 32,850 (64) | 34,050 (71.3) | | | | | | | | |
| 12 | 22,950 (59.8) | 24,000 (68.4) | 24,650 (73.1) | 25,050 (76) | | | | | | |
| 15 | 14,800 (53.1) | 15,700 (63.9) | 16,250 (69.7) | 16,600 (73.1) | 16,950 (75.9) | 17,200 (78) | | | | |
| 20 | 8100 (41.6) | 8750 (56.9) | 9200 (64.4) | 9500 (68.8) | 9700 (72.2) | 9950 (74.7) | 10,150 (76.8) | | | |
| 25 | 4350 (24.2) | 5200 (48.3) | 5650 (58.2) | 5950 (63.8) | 6150 (68) | 6300 (71.1) | 6500 (73.6) | 6650 (75.5) | 6800 (77.2) | |
| 30 | | 2900 (38.3) | 3350 (51.6) | 3600 (58.6) | 3800 (63.7) | 3950 (67.5) | 4100 (70.4) | 4200 (72.5) | 4350 (74.5) | 4450 (76) |
| 35 | | 1300 (25.2) | 1750 (44.3) | 2000 (53) | 2200 (59.3) | 2350 (63.7) | 2,450 (67.1) | 2550 (69.6) | 2650 (71.8) | 2750 (73.5) |
| 40 | | | 600 (35.9) | 850 (47.1) | 1050 (54.6) | 1150 (59.8) | 1300 (63.8) | 1350 (66.6) | 1450 (69.1) | 1550 (71) |
| 45 | | | | | | | | | 550 (66.4) | 600 (68.5) |
| Minimum boom angle (°) for indicated length (no load) | | 23 | 35 | 45 | 52 | 57 | 61 | 64 | 66 | 68 |
| Maximum boom length (ft.) at 0° boom angle (no load) | 32 | | | | | | | | | |

NOTE: () Boom angles are in degrees.

#LMI operating code. Refer to LMI manual for operating instructions.

| Lifting capacities at zero degree boom angle | | | | | | | | | | |
|--|--------------------------|--|--|--|--|--|--|--|--|--|
| Boom angle | Main boom length in feet | | | | | | | | | |
| | 31.7 | | | | | | | | | |
| 0° | 3200 (27.5) | | | | | | | | | |

NOTE: () Reference radii in feet.

80060407

Accessories

Radio Remote Controls –

Eliminate the handling and maintenance concerns that accompany cabled remotes. Operate to a range of about 76 m (250 ft), varying with conditions. Remote transmitter displays LMI information on LCD screen.

• NB6R

Personnel Platforms –

Rotating style, 72 in x 42 in (1829 mm x 1067 mm) steel platform on a 4 ft (1,2 m) yoke extension, gravity hung, adjustable friction brake lock (does not side stow). Extension angles with two(2) pin positions. platform rotates 90o each side from normal platform position when extension is in lower position. Includes rapid attach boom attachment.

• R-RAP2

Yoke style, 72 in x 36 in (1829 mm x 914 mm) steel platform, gravity hung with cylinder brake lock (does not side stow). Includes rapid attach boom attachment.

• Y-RAP2

** Platform capacities: 1,200 lbs (544,3 kg) main boom & 500 lbs (226,7 kg) on jib.*

Calibration for customer jib

• CJIB

Auxiliary Winch –

Second winch redundant to the main, 15,000 lb gear set, two-speed piston motor, cable packer, grooved drum, DRI/LLI standard with 5/8 in Dyform 34LR wire rope

• AW

Spanish-Language Danger Decals, Control Knobs, and Operators' Manuals

• SDD
• SOM

Rotation Bearing Lock

Manual applied lock on rotation bearing (360° positioning)

• MRL

Metric Capacity Charts

• MCC

Dual-Axis Electronic Joysticks

In place of single-axis joysticks

• DAJS

Special Paint

One color in lieu of standard paint color-non metallic

• SPECIAL PAINT

Auxiliary access step

• AAS

Notes

Manitowoc Cranes

Regional headquarters

Americas

Manitowoc, Wisconsin, USA
Tel: +1 920 684 4410

Shady Grove, Pennsylvania, USA
Tel: +1 717 597 8121

Europe, Middle East, Africa

Dardilly, France - TOWERS
Tel: +33 (0)4 72 18 20 20

Wilhelmshaven, Germany - MOBILE
Tel: +49 (0) 4421 294 0

China

Shanghai, China
Tel: +86 21 6457 0066

Middle East and
Greater Asia-Pacific
Singapore
Tel: +65 6264 1188

Dubai, UAE
Tel: +9714 8862677



This document is non-contractual. Constant improvement and engineering progress make it necessary that we reserve the right to make specification, equipment, and price changes without notice. Illustrations shown may include optional equipment and accessories and may not include all standard equipment.

www.manitowoc.com