




TECHNICAL DATA | IMPERIAL

AC 4.100L-1

120 US TON MAX. CRANE CAPACITY

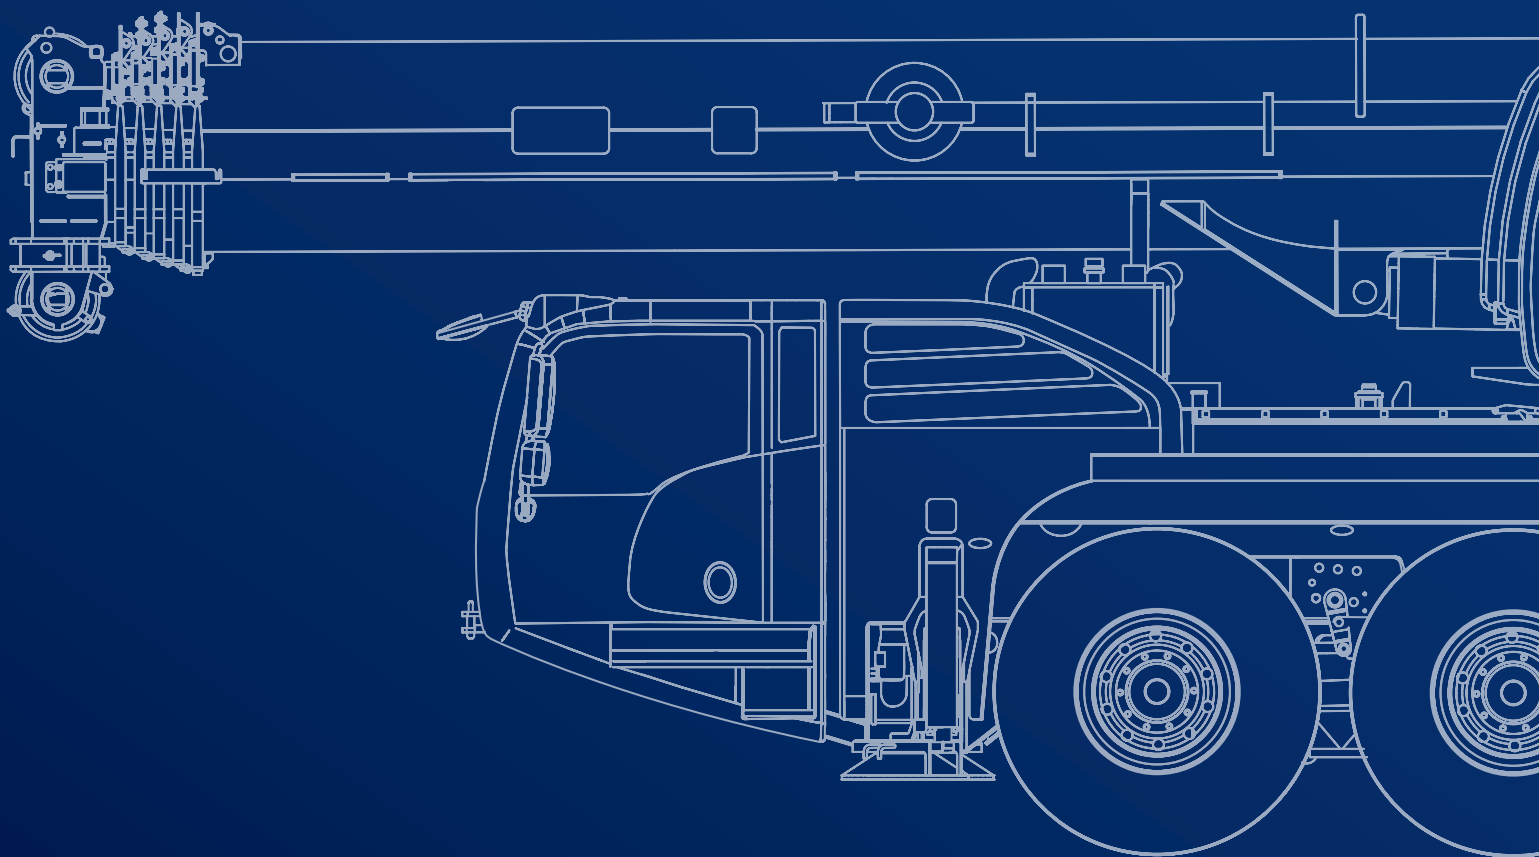




February 2023. Unless otherwise specified, all information in this brochure refers to a standard crane equipment, and it is intended as general information only. No liability is assumed. Errors reserved. Product specifications and prices are subject to changes without notice. The photographs and/or drawings in this brochure are for illustrative purposes only. For correct and safe crane operation, the original operating manual and lifting capacity charts are essential. Failure to follow the corresponding Operator's Manual when using our equipment or failure to otherwise act responsibly may result in property damage, serious injury or death. The sole warranty applicable with respect to our equipment is the standard warranty as per general terms and conditions of sales and service (ask your local Tadano dealer for details), and Tadano makes no other warranty, express or implied. All rights reserved. Any use of the trademarks, logos, brand names and model names used herein is prohibited.

© Tadano Ltd. 2023


Contents

General	5
Vehicle dimensions	6
Boom combinations	7-8
On-road and off-road driving	9
Axle loads	10
Speeds and gradeability	10
Steering	10
Transportation	11
Counterweight	12-13
Configurations	12
Jib	14-15
Operation	17
Main boom	19
Slewing	19
Hoist	19
Outrigger cylinders	19
Hook Blocks	19
HA (HA60): Main boom	20-23
HAV (HA60): Folding swing-away jib	24-27
HAV-VA (HA60): Variable extension with swing-away jib	28-34
MS (HA60): Runner	36-39
HA (HA50): Main boom	40-44
HAV (HA50): Folding swing-away jib	46-50
HAV-VA (HA50): Variable extension with swing-away jib	52-60
MS (HA50): Runner	62-65
Notes to Lifting Capacity	66
Technical Description	67
Basic machine	68
Additional equipment	69

Key



	Counterweight		Transport storage HAV at main boom
	Lifting capacities on outriggers - 360°		Dolly
	Radius		Working speeds
	Main boom		Slewing
	Folding swing-away jib		Max. line pull
	Runner		Rope diameter
	Adapter		Rope length
	Max. axle loads		Hook block
	Mechanism		Number of lines
	Tires		Possible load of hook block
	Hook block		Weight of hook block
	Hoist		Distance head sheave axle – hook ground
	Travel speed		Number of sheaves in hook block
	Gradeability		Max. outrigger load
	Off road / On road		Length of stroke (support cylinders)
	Boom telescoping		Additional parts for hydraulic system
	Boom elevation		Payload incl. rear storage box

GENERAL TECHNICAL DATA

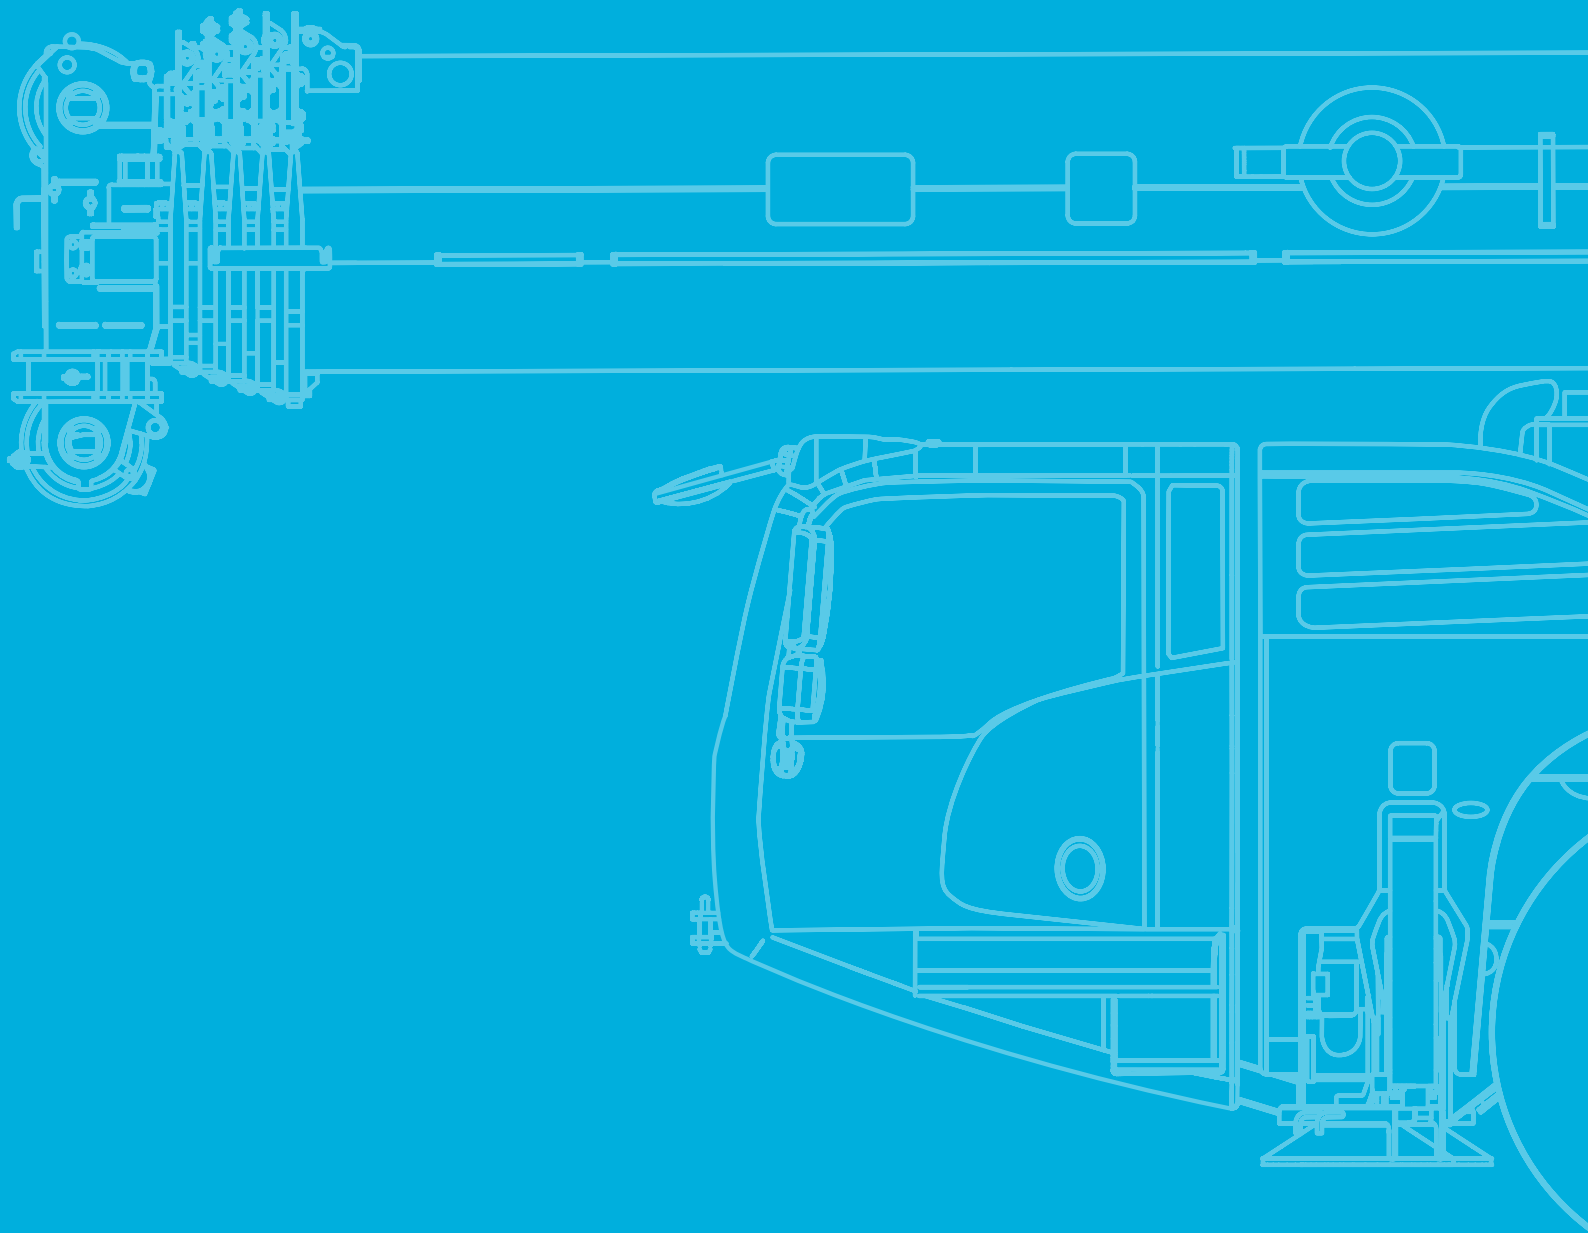



General

Vehicle dimensions

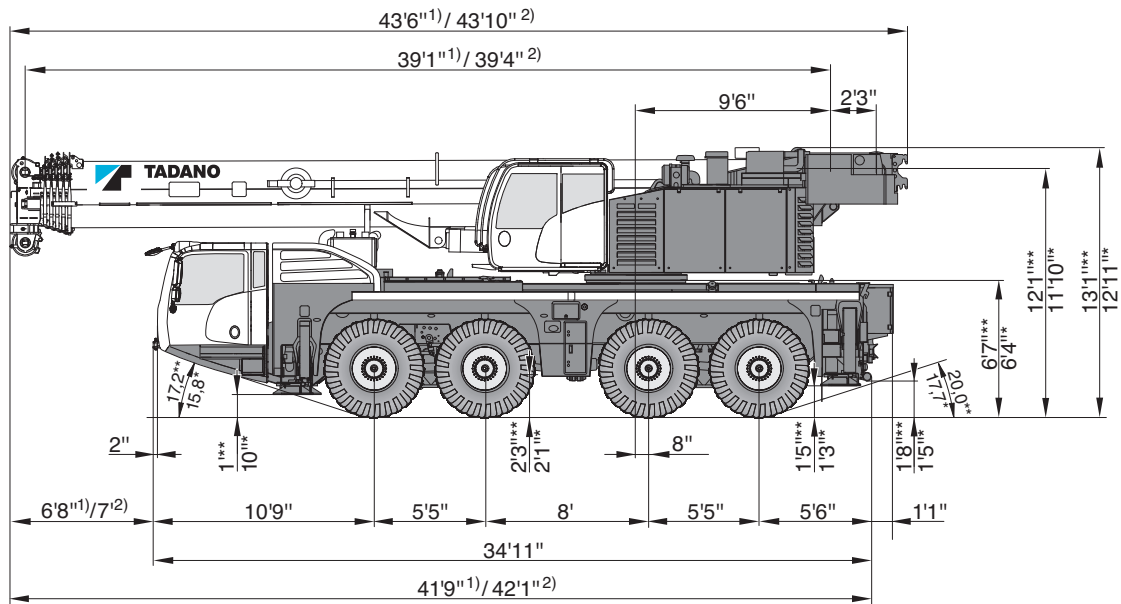

*  385/95 R25

**** 445/95 R25 / 525/80 R25**

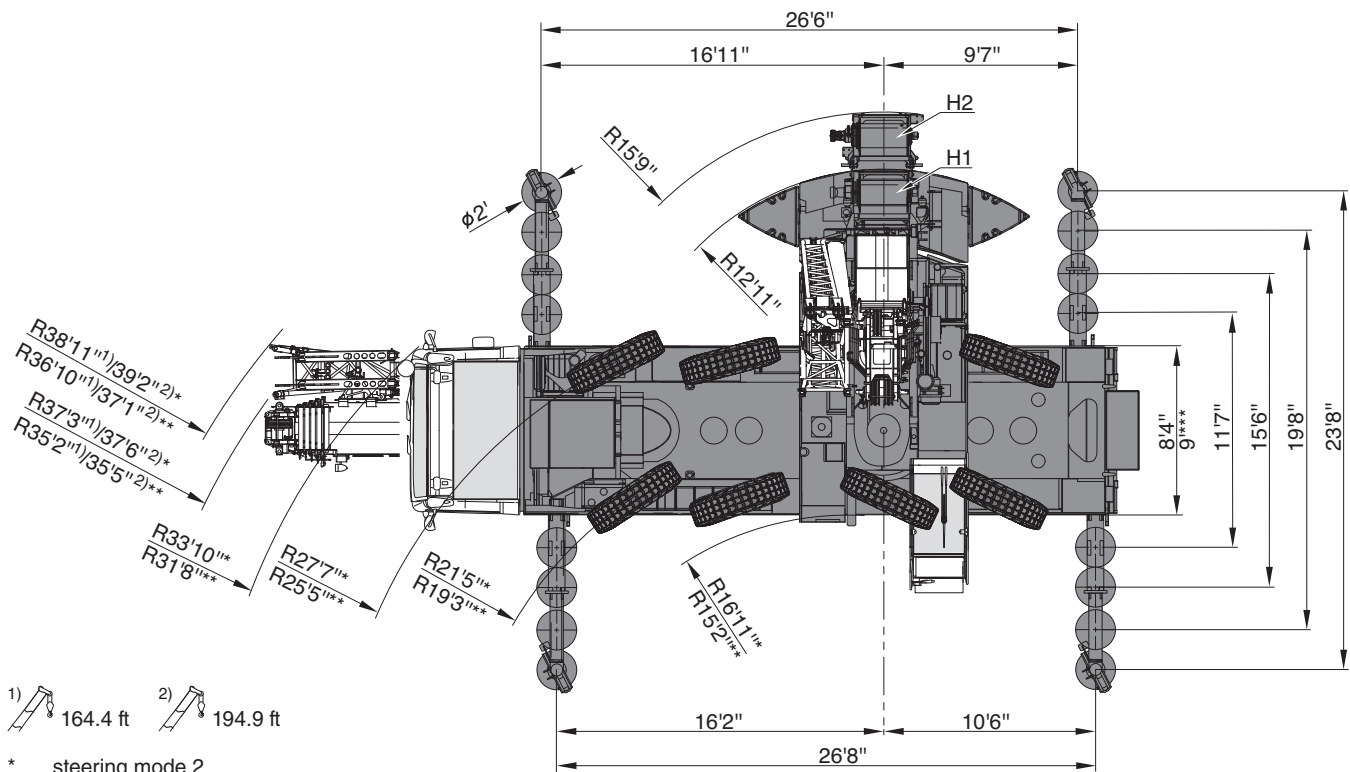


* steering mode 2


** steering mode 3

*** 525/80 R25


Boom combinations

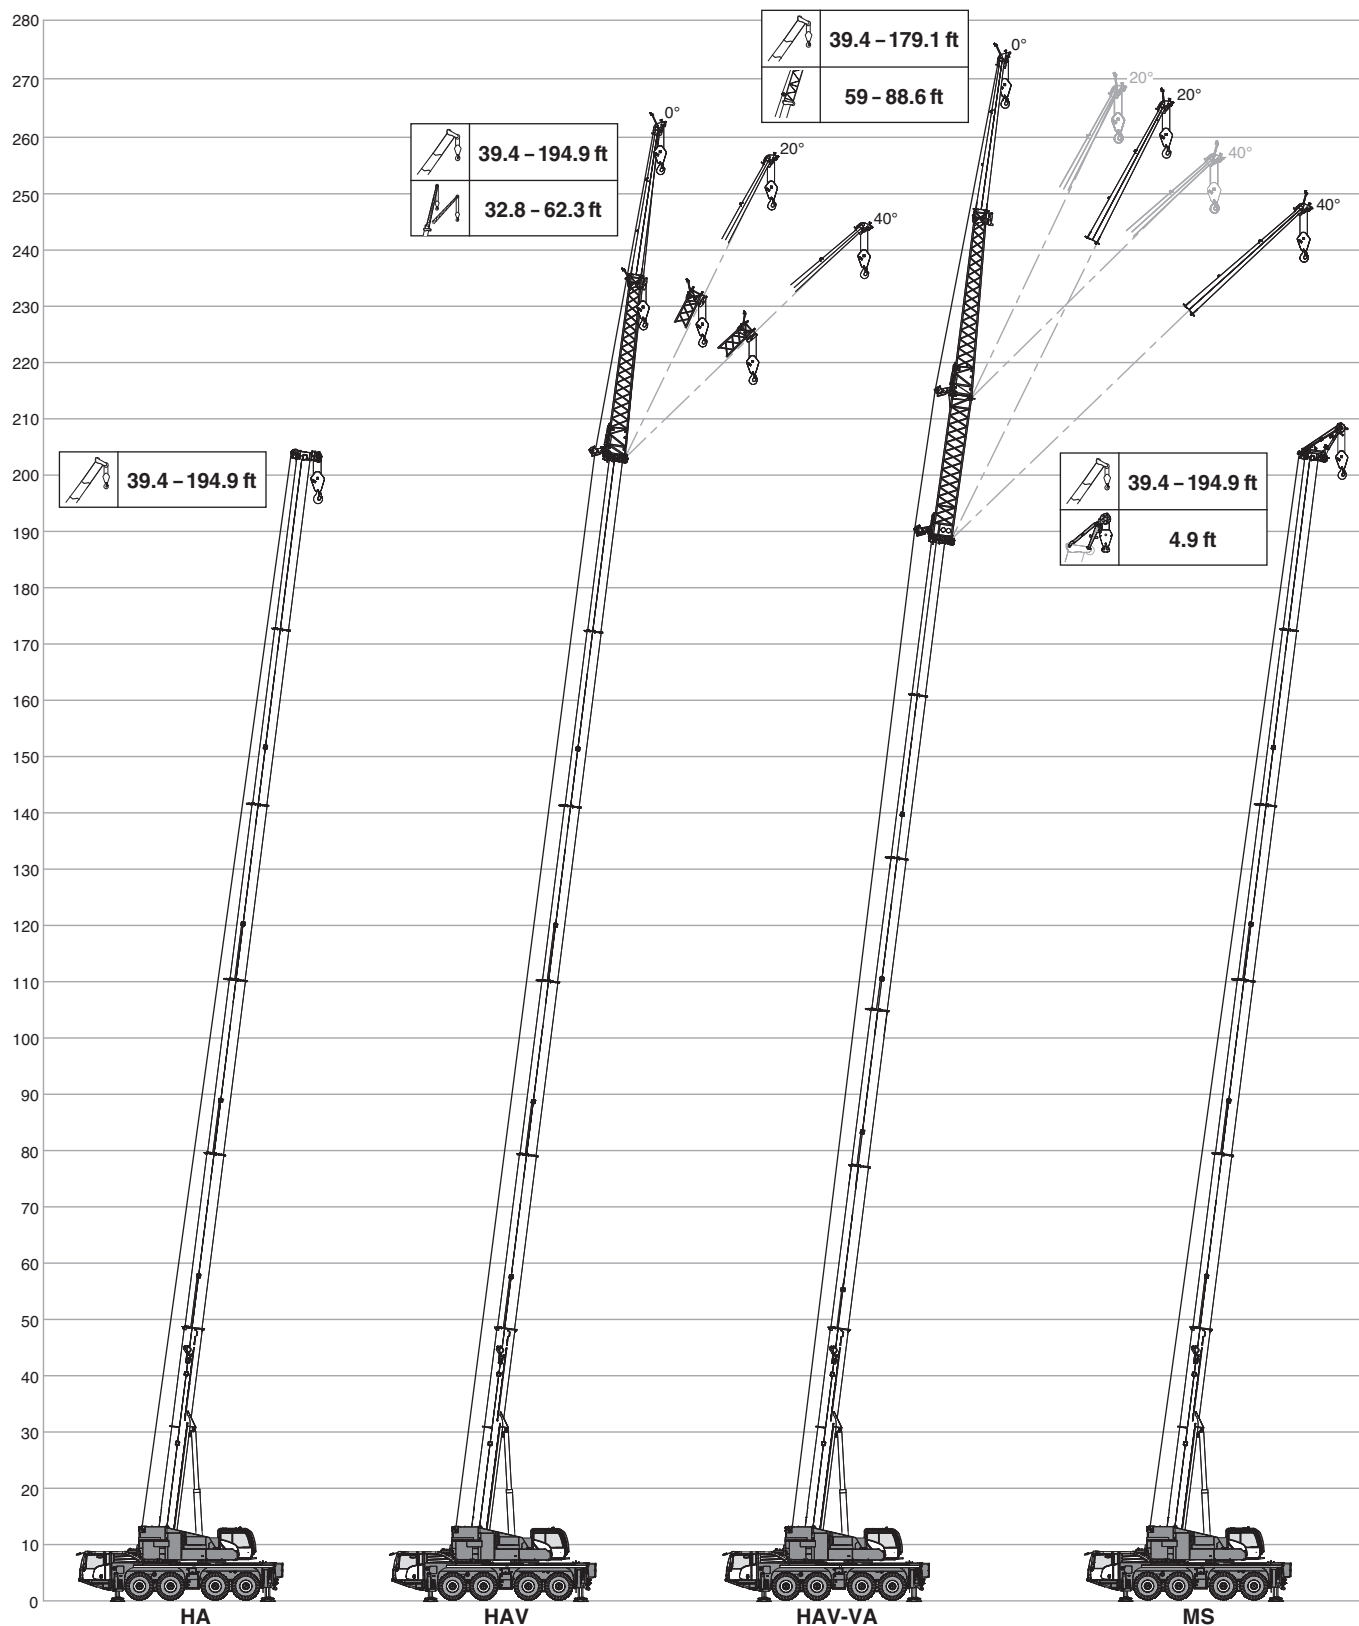

Boom combinations

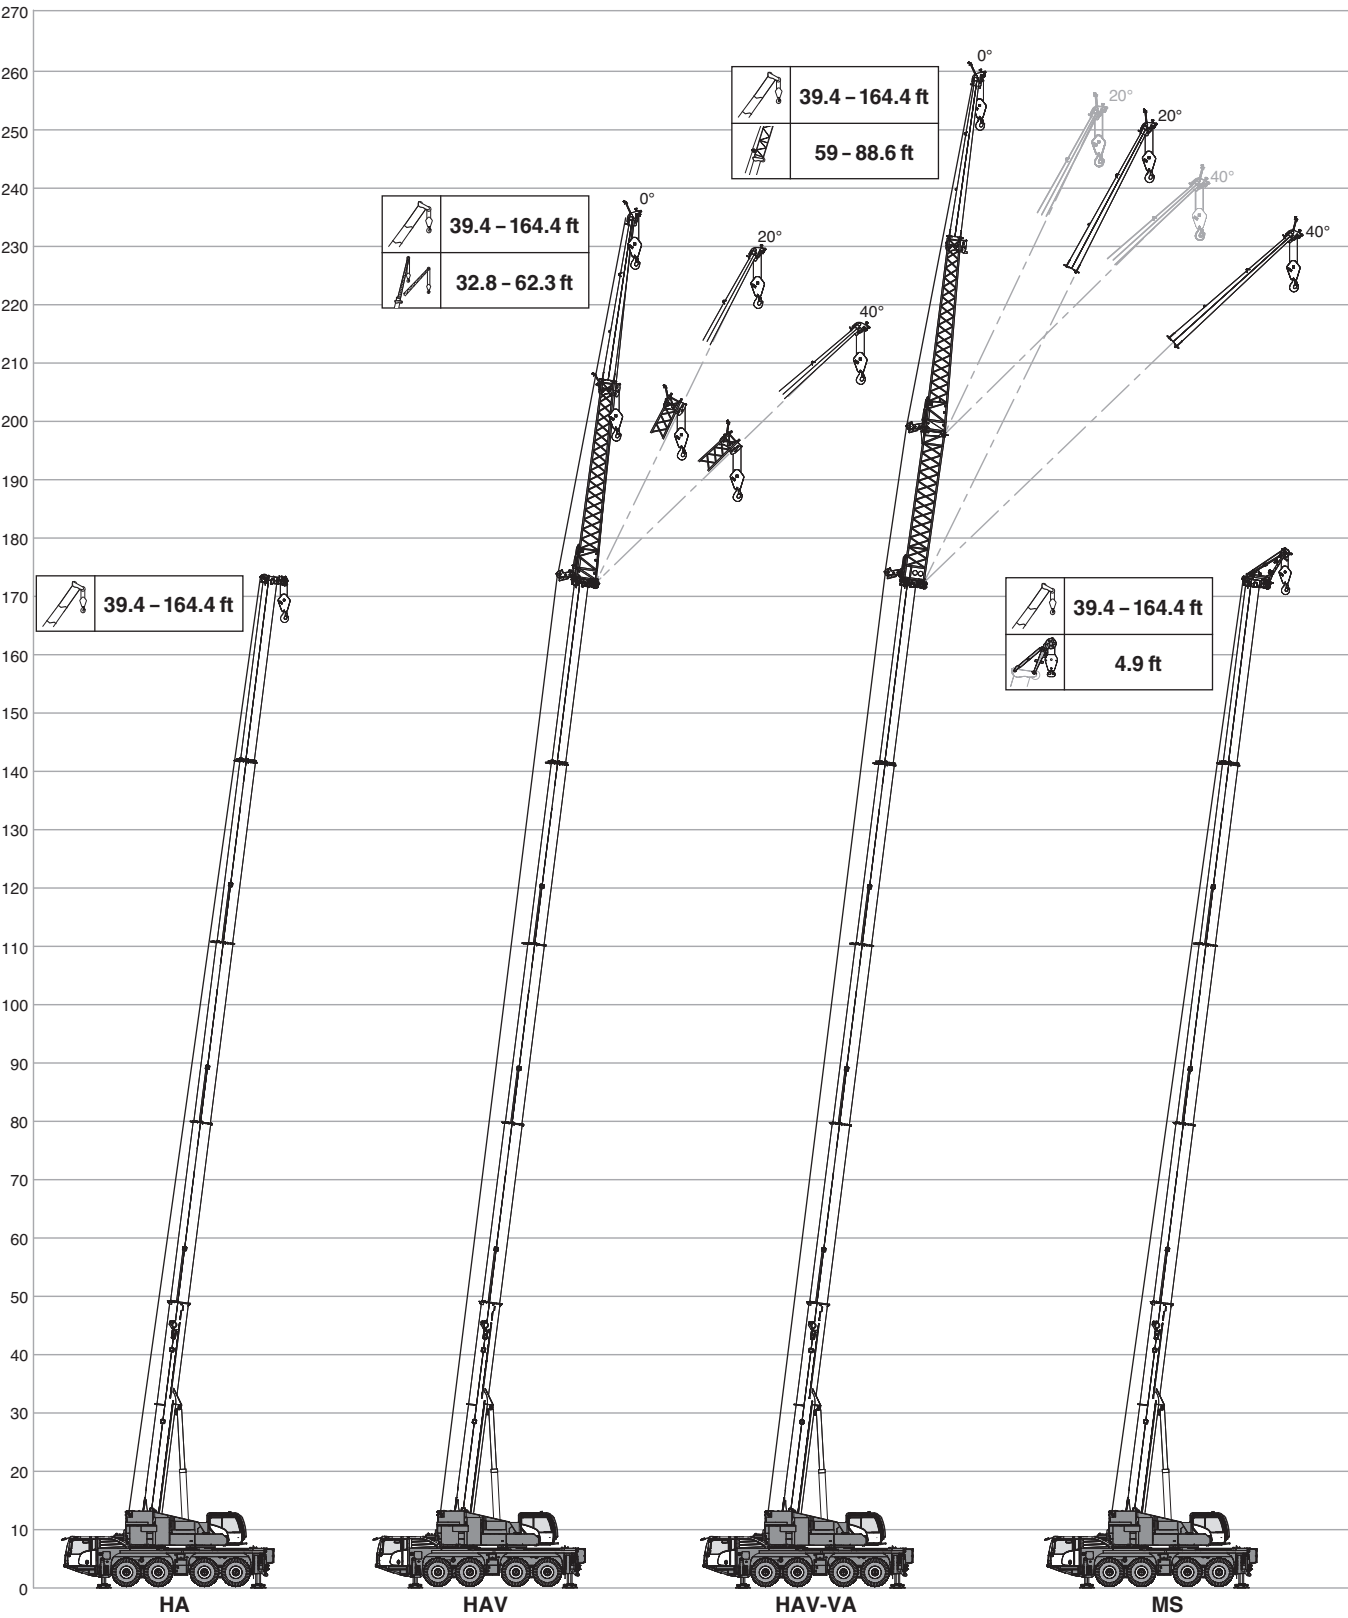

TECHNICAL DATA FOR ON-ROAD AND OFF-ROAD DRIVING

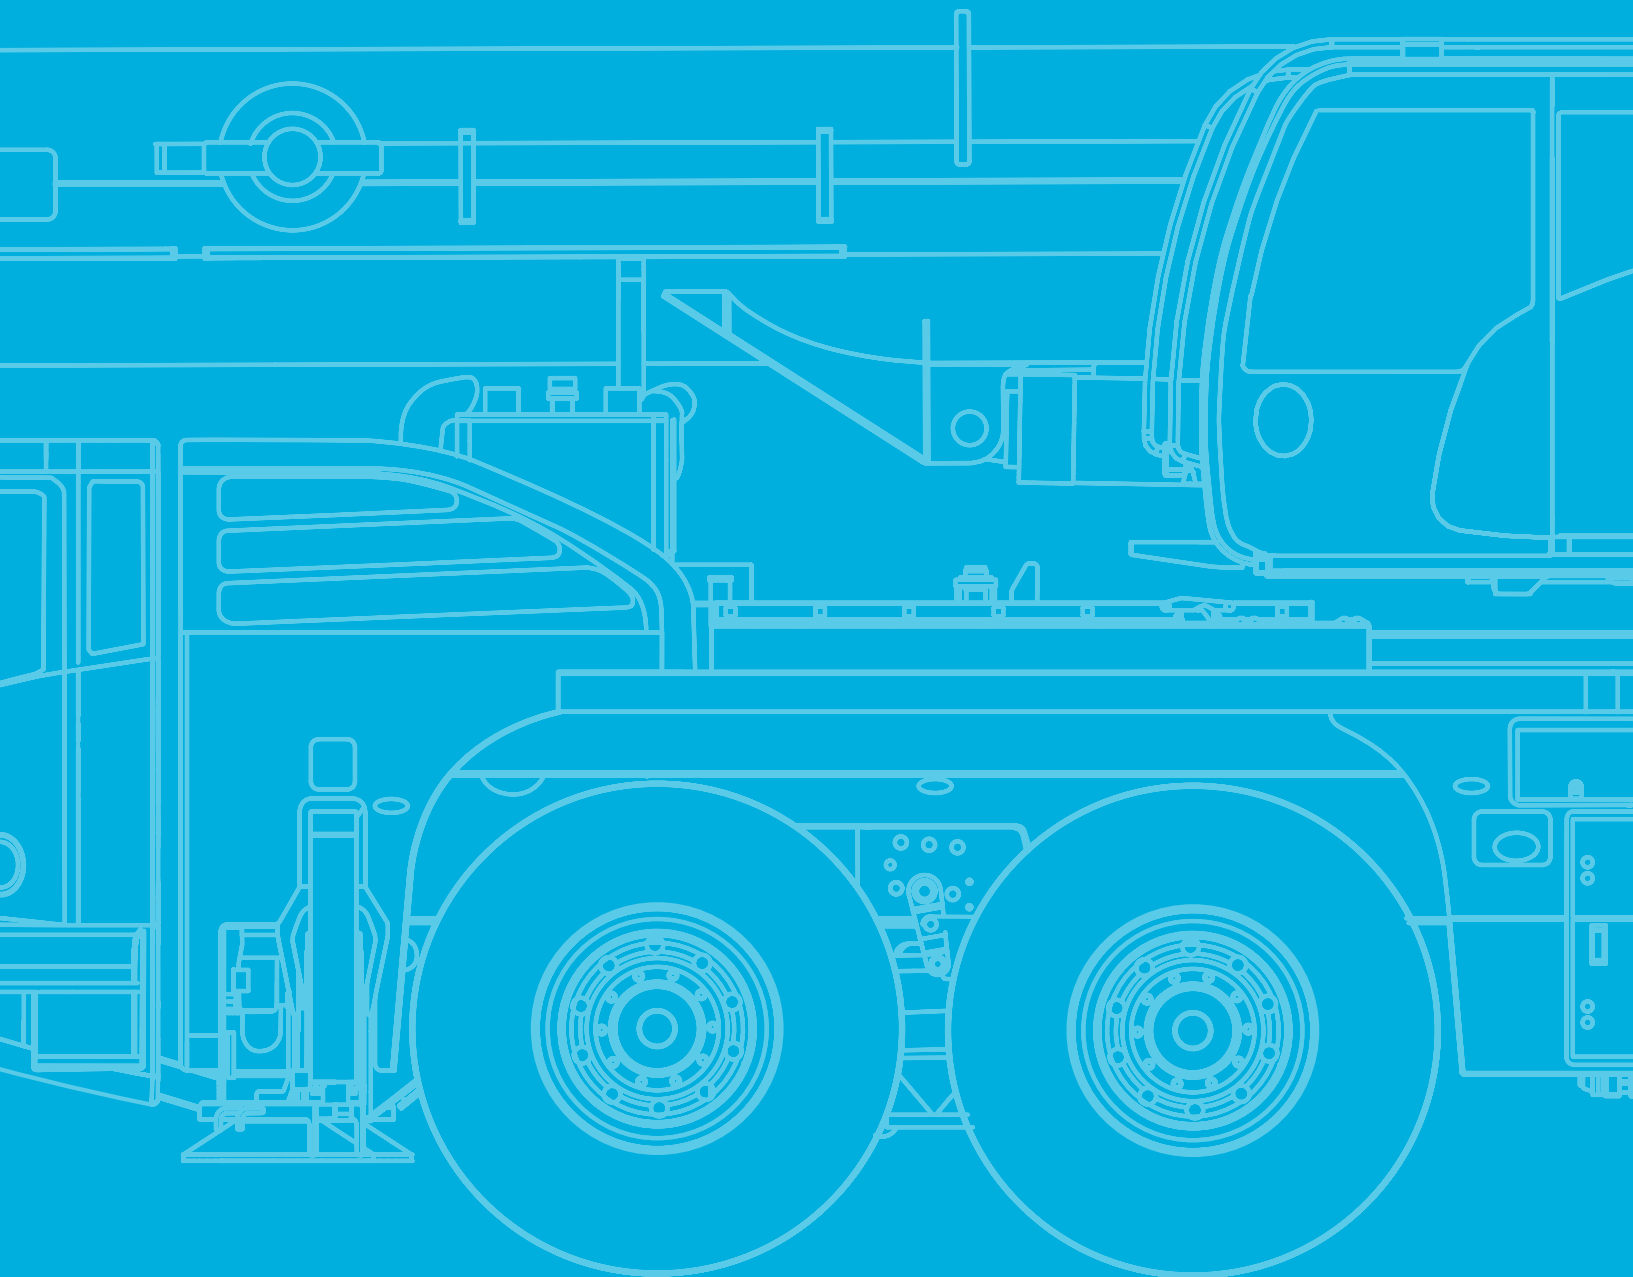

On-road and off-road driving

Axle loads

	Total			TELMA									
< 20,000 lbs	On request!												X
< 26,500 lbs	< 106,000 lbs	8 x 6 x 8	445/95R25	X	17,600 lbs	13,400 lbs	—	X	—	X	—	—	—
< 26,500 lbs	< 106,000 lbs	8 x 6 x 8	445/95R25	X	17,600 lbs	9,500 lbs	62.3 ft	X	—	X	—	—	—
< 36,400 lbs	< 143,300 lbs	8 x 6 x 8	445/95R25	X	110,200 lbs	42,500 lbs	62.3 ft*	X	X	X	—	1,320 lbs	—
< 26,500 lbs	< 106,000 lbs	8 x 6 x 8	445/95R25	X	110,200 lbs	9,500 lbs	—	X	X	—	X	1,320 lbs	—
< 26,500 lbs	< 106,000 lbs	8 x 6 x 8	445/95R25	—	17,600 lbs	9,500 lbs	32.8 ft	X	—	—	X	660 lbs	—
< 26,500 lbs	< 106,000 lbs	8 x 4 x 8	445/95R25	X	17,600 lbs	9,500 lbs	32.8 ft	X	—	—	X	880 lbs	—
< 36,400 lbs	< 145,500 lbs	8 x 6 x 8	445/95R25	X	110,200 lbs	42,500 lbs	62.3 ft*	X	X	—	X	1,320 lbs	—

Further configurations on request!





* hydraulic

Speeds and gradeability

	385/95 R 25 14.00 R 25	445/95 R 25 16.00 R 25	525/80 R 25 20.50 R 25
 %	46 %	42 %	42 %
 %	> 70 %	> 60 %	> 60 %
	max. 52.8 mph ¹⁾		


¹⁾ Depending on tire type, size and country specific legislation

Steering

	1 Highway > 28 mph
	2 City < 28 mph
	3* Minimum turning radius < 3 mph
	4* Off-wall
	5* Crab steer mode
	6* All wheel steering


* must be activated

TECHNICAL DATA FOR TRANSPORT

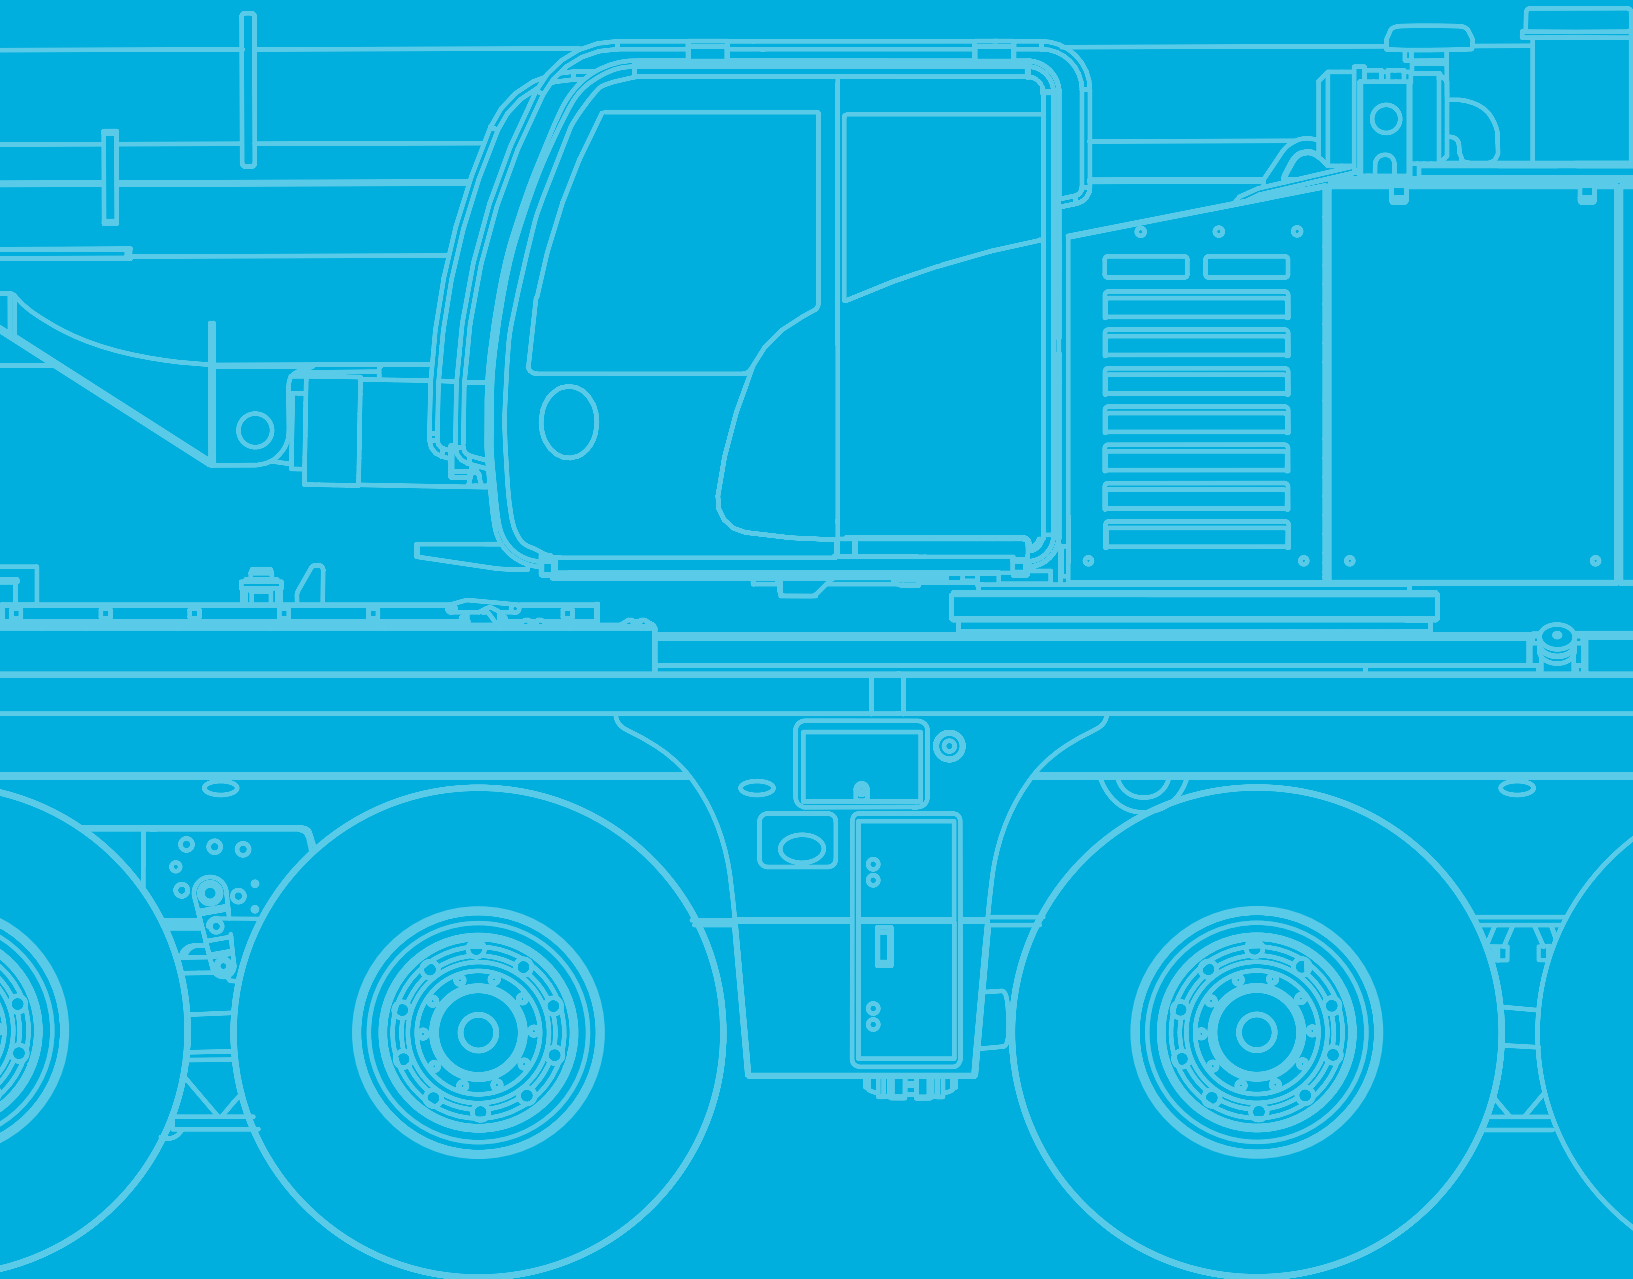

Transportation

Counterweight

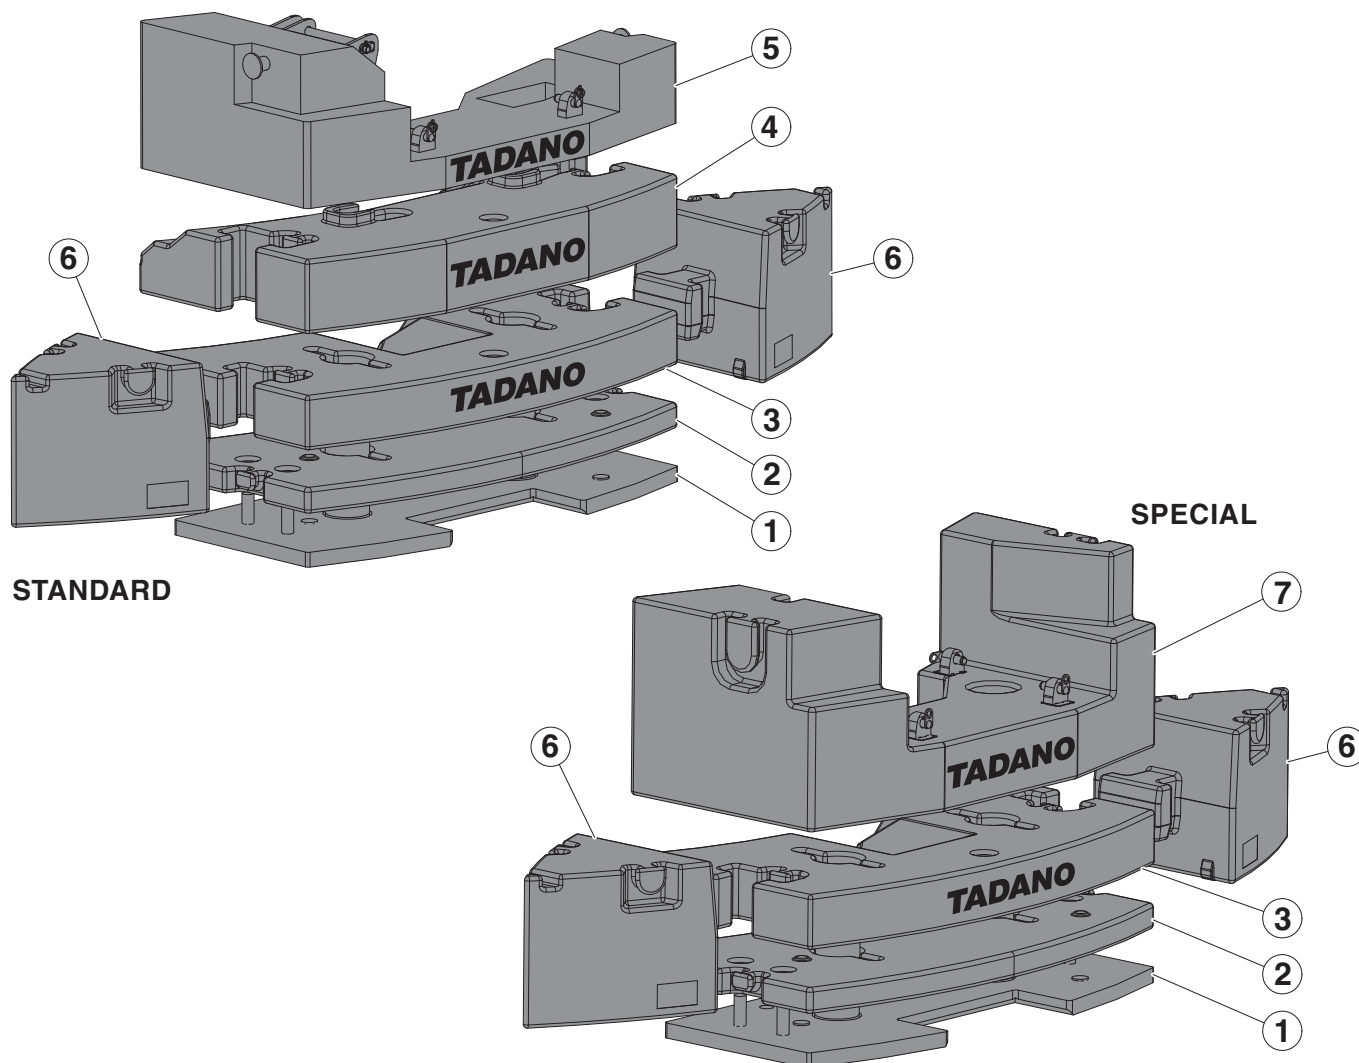



Configurations

	STANDARD											SPECIAL				
lbs	4,000	9,500	9,500	13,400	19,000	20,000	29,500	33,000	42,500	44,500	54,000	22,500	26,500	32,000	42,500	54,000
① 4,000 lbs	1		1	1	1	1	1	1	1	1	1		1	1	1	1
② 5,500 lbs			1		1	1	1	1	1	1	1			1	1	1
③ 10,600 lbs						1	1	1	1	1	1				1	1
④ 13,000 lbs								1	1	1	1					
⑤ 9,500 lbs		1		1	1		1		1		1					
⑥ 5,700 lbs										1	1					1
⑥ 5,700 lbs										1	1					1
⑦ 22,500 lbs												1	1	1	1	1



Transportation

Counterweight


①

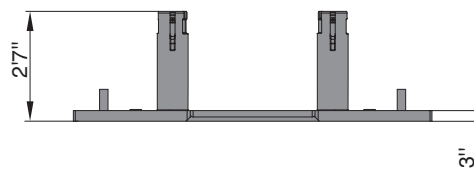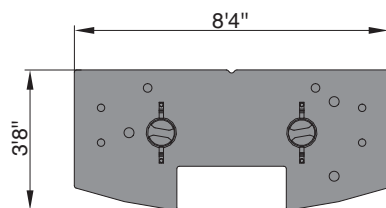



②

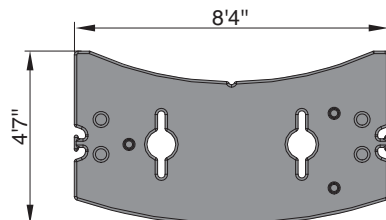



③

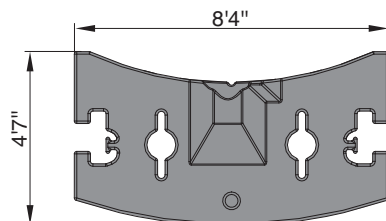

④

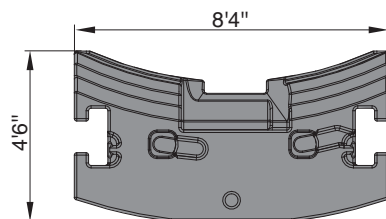



⑤

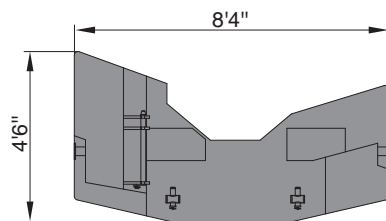

⑥




⑦

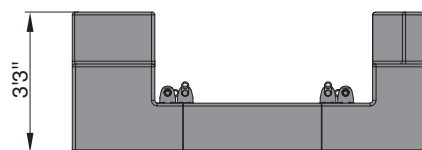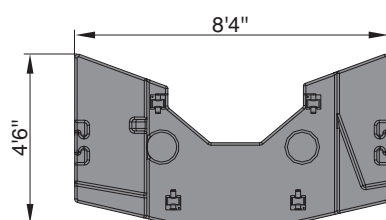

Transportation

Jib


HAV / HAV-VA

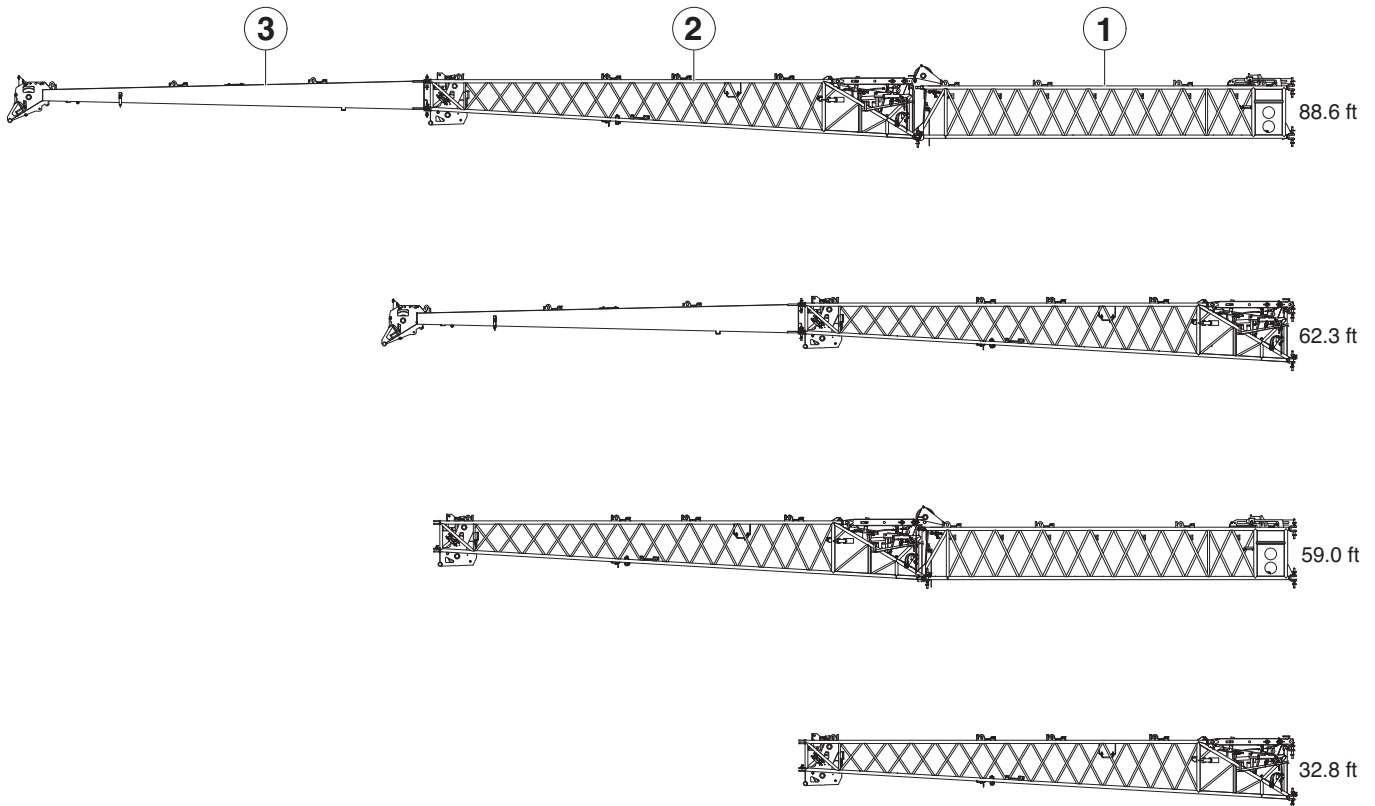


Transportation

Jib


1  2,650

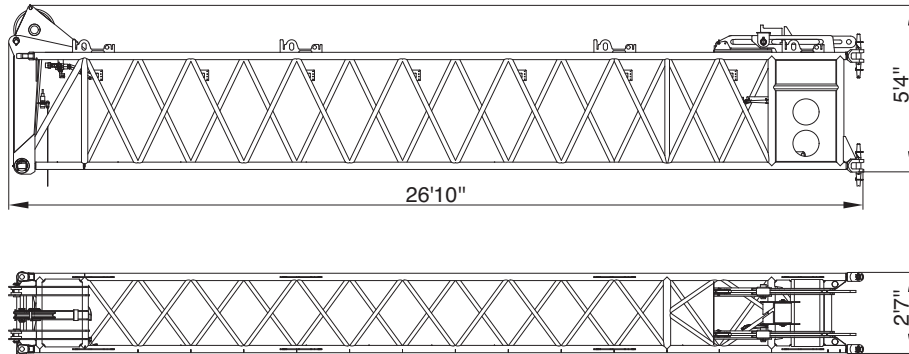


2  2,540 / 2,870 (HY)

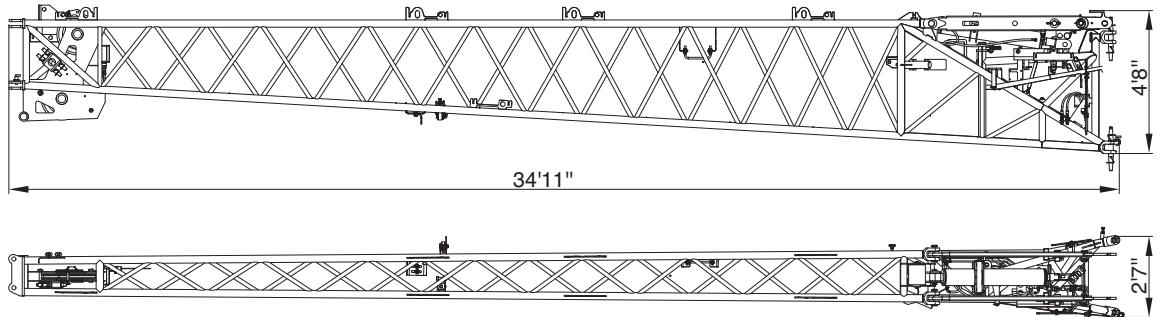

3  1,320

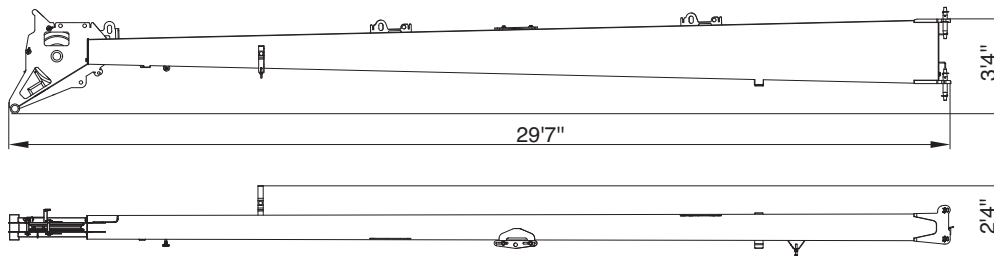


 770

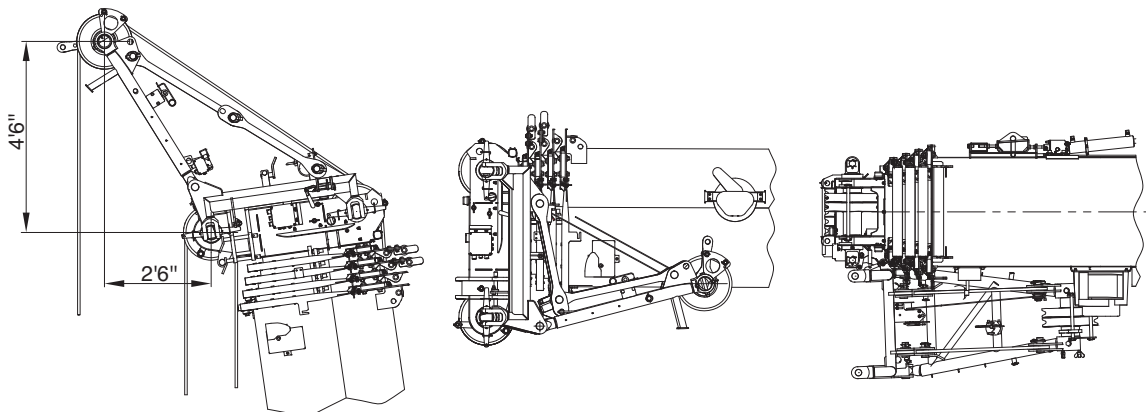

Notes

TECHNICAL DATA FOR OPERATION

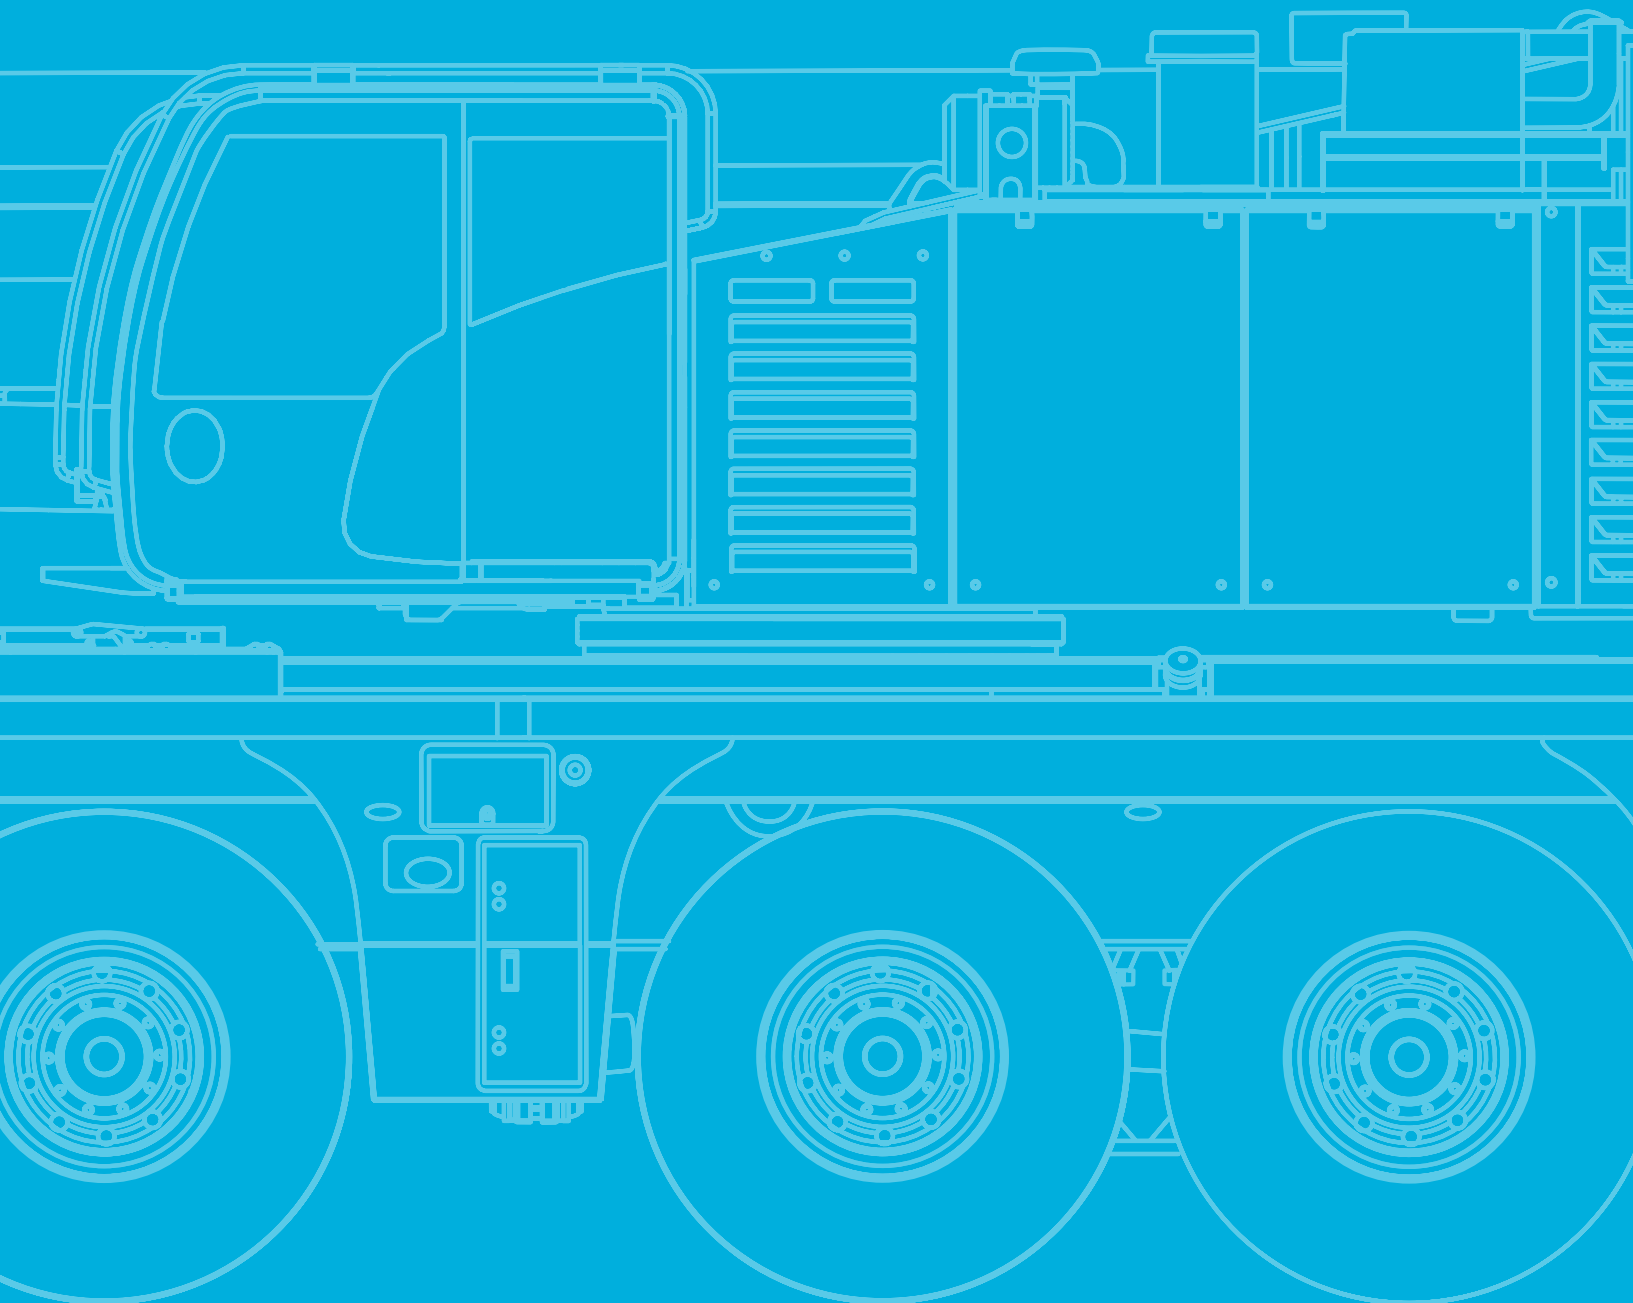

Notes

Operation

Main boom



 HA50	approx. 490 s (39.4 – 164.4 ft)		approx. 60 s (0° - 82°)
 HA60	approx. 590 s (39.4 – 194.9 ft)		approx. 60 s (0° - 82°)


Slewing

	1,9 min ⁻¹
---	-----------------------

Hoist

				
1	361 ft/min	14,500 lbf	0.72"	870 ft
2	361 ft/min	14,500 lbf	0.72"	870 ft


Outrigger cylinders

		
	94,800 lbs	134,500 lbs
	22.4"	25.2"

Hook Blocks



					
17,600 lbs	15,000 lbs	—	1	375 lbs	3.3 ft
44,100 lbs	44,100 lbs	1	3	660 lbs	5.9 ft
110,200 lbs	101,200 lbs	3	7	1,320 lbs	5.9 ft
176,400 lbs	155,700 lbs	5	11	2,360 lbs	6.6 ft
220,500 lbs	176,400 lbs	7	13	2,320 lbs	6.6 ft

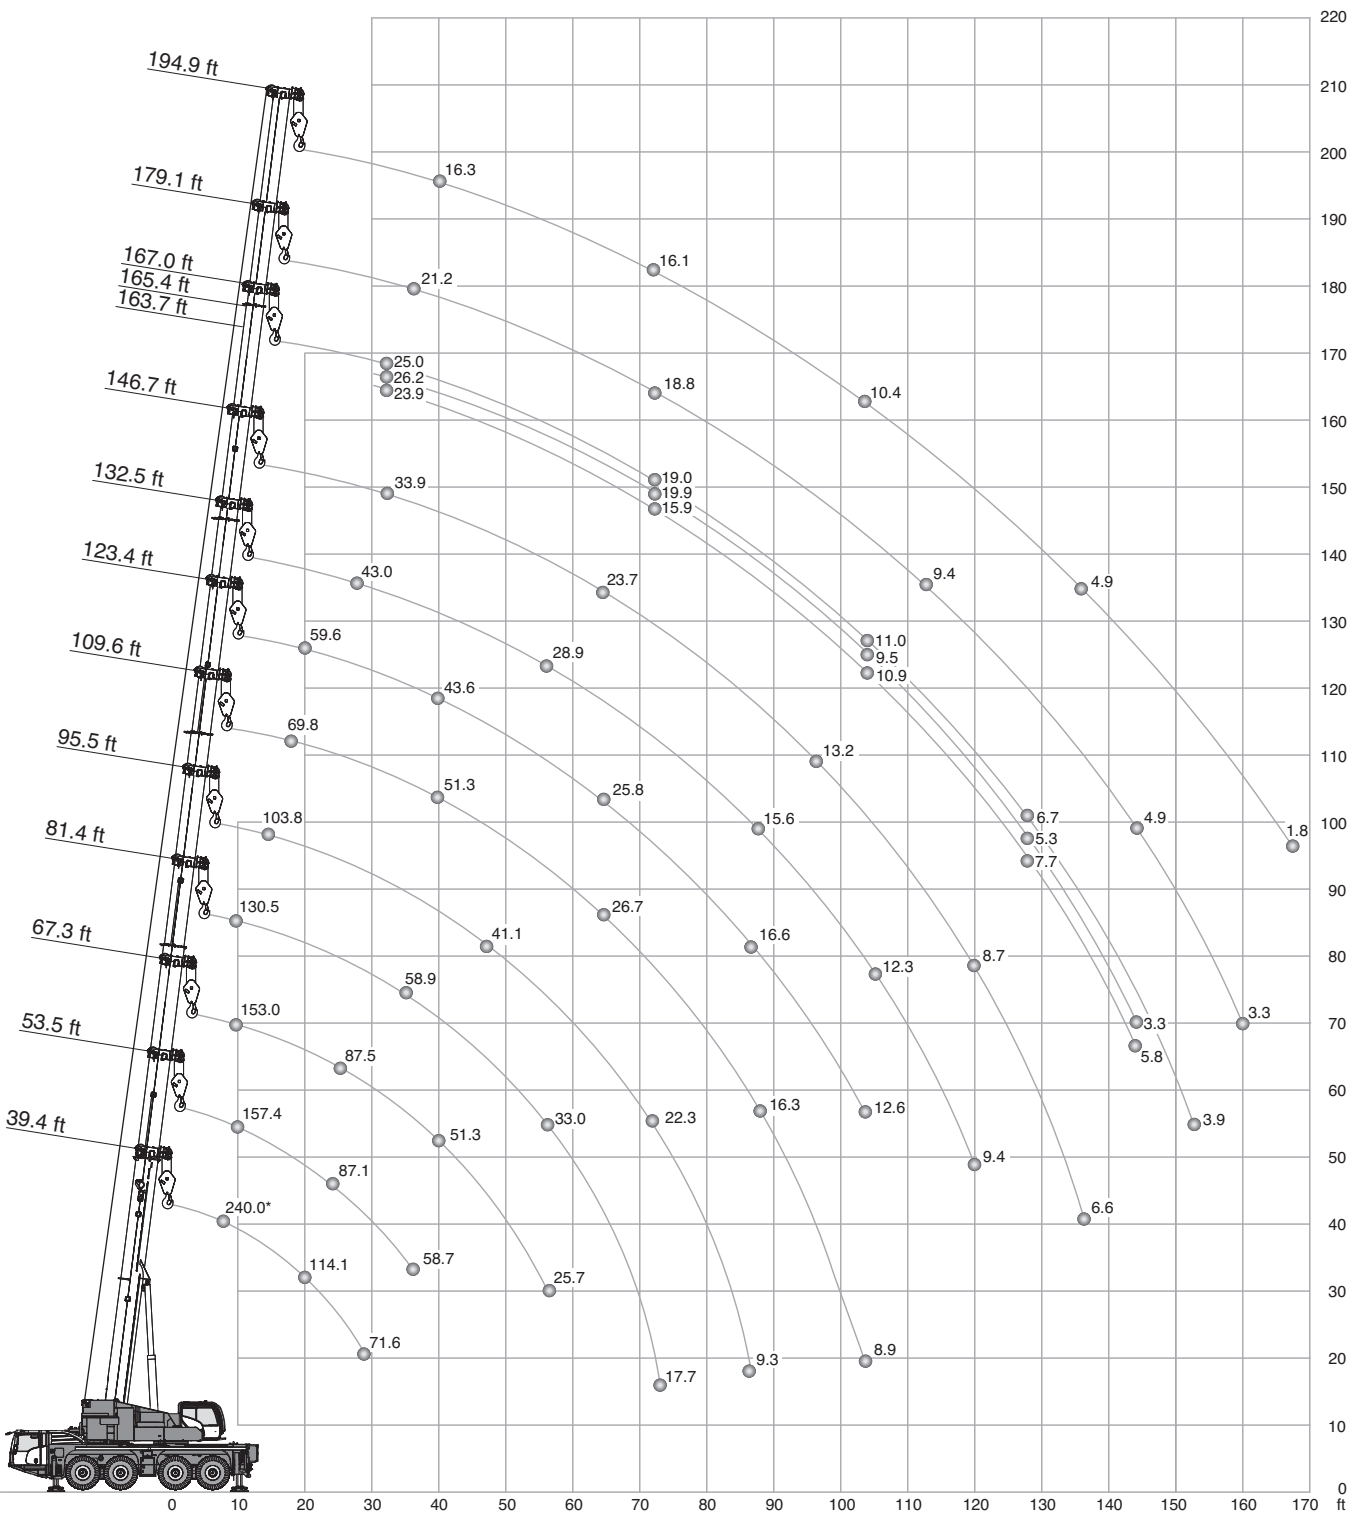

* Max. crane capacity – with additional special equipment

Operation

HA
(HA60)

 54,000 lbs		 26.6 ft x 23.6 ft		360°		ASME B30.5												
 (0°)	39.4	39.4	53.5	67.3	81.4	95.5	109.6	(ft)		123.4	132.5	146.7	163.7	165.4	167.0	179.1	194.9	
ft	1,000 lbs																	ft
8	240.0*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	8
10	175.1	161.2	157.4	153.0	130.5	-	-	-	-	-	-	-	-	-	-	-	-	10
12	160.1	145.0	143.8	139.6	127.0	-	-	-	-	-	-	-	-	-	-	-	-	12
14	147.3	130.8	131.4	128.3	121.9	103.8	-	-	-	-	-	-	-	-	-	-	-	14
16	135.8	118.5	119.4	118.5	116.1	97.8	-	-	-	-	-	-	-	-	-	-	-	16
18	125.0	108.6	109.5	110.1	108.8	92.3	69.8	-	-	-	-	-	-	-	-	-	-	18
20	114.1	99.4	101.3	101.6	101.1	87.2	68.4	59.6	-	-	-	-	-	-	-	-	-	20
24	92.3	85.3	87.1	87.5	86.9	81.2	65.6	55.1	-	-	-	-	-	-	-	-	-	24
28	71.6	67.1	76.1	76.5	75.9	74.8	62.3	51.9	43.0	-	-	-	-	-	-	-	-	28
32	-	-	67.0	67.3	66.8	65.7	58.7	49.5	41.2	33.9	23.9	26.2	25.0	-	-	-	-	32
36	-	-	58.7	59.0	58.9	59.0	55.2	46.6	39.6	33.0	23.6	26.2	24.9	21.2	-	-	-	36
40	-	-	-	51.3	53.1	52.4	51.3	43.6	37.8	32.2	23.3	26.2	24.9	21.2	16.3	-	-	40
48	-	-	-	41.8	41.7	41.1	39.6	37.0	33.3	29.8	21.9	25.9	24.3	21.2	16.3	-	-	48
56	-	-	-	25.7	33.0	32.3	31.0	31.5	28.9	26.7	19.7	24.3	22.9	20.9	16.3	-	-	56
64	-	-	-	-	26.9	26.1	26.7	25.8	24.5	23.7	17.7	22.1	20.9	20.1	16.3	-	-	64
72	-	-	-	-	17.7	22.3	22.6	21.3	21.9	20.3	15.9	19.9	19.0	18.8	16.1	-	-	72
80	-	-	-	-	-	19.7	19.2	18.7	18.3	18.0	14.3	16.7	17.2	17.1	15.5	-	-	80
88	-	-	-	-	-	9.3	16.3	16.6	15.6	15.6	13.1	13.9	15.3	14.7	14.2	-	-	88
96	-	-	-	-	-	-	14.1	14.5	13.8	13.2	12.0	11.5	13.0	12.8	12.3	-	-	96
104	-	-	-	-	-	-	8.9	12.6	12.3	11.9	10.9	9.5	11.0	11.0	10.4	-	-	104
112	-	-	-	-	-	-	-	-	10.7	10.3	10.1	7.9	9.4	9.4	8.7	-	-	112
120	-	-	-	-	-	-	-	-	9.4	8.7	8.9	6.5	7.9	8.1	7.2	-	-	120
128	-	-	-	-	-	-	-	-	-	7.7	7.7	5.3	6.7	6.8	5.9	-	-	128
136	-	-	-	-	-	-	-	-	-	6.6	6.6	4.2	5.5	5.8	4.9	-	-	136
144	-	-	-	-	-	-	-	-	-	-	5.8	3.3	4.7	4.9	4.0	-	-	144
152	-	-	-	-	-	-	-	-	-	-	-	-	3.9	3.9	3.2	-	-	152
160	-	-	-	-	-	-	-	-	-	-	-	-	-	3.3	2.5	-	-	160
168	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.8	-	-	168

* Max. crane capacity – with additional special equipment

Operation

HA
(HA60)

 42,500 lbs		 26.6 ft x 23.6 ft		360° / Max.*								ASME B30.5				
		360° 39.4ft	Max. 39.4ft	360° 53.5ft	Max. 53.5ft	360° 67.3ft	Max. 67.3ft	360° 81.4ft	Max. 81.4ft	360° 95.5ft	Max. 95.5ft	360° 109.6ft	Max. 109.6ft	360° 123.4ft	Max. 123.4ft	
1,000 lbs																ft
10	160.5	161.2	157.4	157.4	153.0	153.0	130.5	130.5	-	-	-	-	-	-	-	10
12	143.9	145.0	143.6	143.9	139.6	139.6	127.0	127.0	-	-	-	-	-	-	-	12
14	129.4	130.8	130.1	131.4	128.3	128.3	121.9	121.9	103.8	103.8	-	-	-	-	-	14
16	117.2	118.5	118.0	119.4	118.4	118.5	116.1	116.1	97.8	97.8	-	-	-	-	-	16
18	107.4	108.6	109.0	109.5	109.6	110.1	108.2	108.7	92.3	92.3	69.8	69.8	-	-	-	18
20	98.3	99.4	100.2	101.3	100.5	101.6	100.0	101.1	87.2	87.2	68.4	68.4	59.6	59.6	-	20
24	84.2	85.3	86.2	87.1	86.5	87.5	86.0	86.9	81.1	81.2	65.6	65.6	55.1	55.1	-	24
28	66.7	67.1	74.4	74.9	74.7	75.2	74.2	74.7	73.2	73.5	62.3	62.3	51.9	51.9	-	28
32	-	-	63.2	64.0	63.7	64.2	64.3	64.5	63.6	64.0	58.7	58.7	49.5	49.5	-	32
36	-	-	54.2	55.6	54.6	55.8	56.5	57.5	55.7	56.8	52.6	53.6	46.6	46.6	-	36
40	-	-	-	-	48.4	49.5	48.4	50.1	47.5	49.2	46.0	47.9	43.3	43.5	-	40
48	-	-	-	-	36.5	38.1	36.5	38.0	35.6	37.3	34.3	36.1	35.0	35.6	-	48
56	-	-	-	-	23.0	24.5	28.7	30.0	27.8	29.4	28.8	29.4	27.7	29.1	-	56
64	-	-	-	-	-	-	23.1	24.4	24.0	24.6	23.5	24.8	22.6	23.5	-	64
72	-	-	-	-	-	-	17.0	17.0	20.1	21.2	19.3	20.6	19.7	20.3	-	72
80	-	-	-	-	-	-	-	-	17.0	18.1	16.5	17.4	16.6	17.7	-	80
88	-	-	-	-	-	-	-	-	9.3	9.2	14.9	15.2	14.0	15.1	-	88
96	-	-	-	-	-	-	-	-	-	-	12.9	13.7	12.5	13.1	-	96
104	-	-	-	-	-	-	-	-	-	-	8.9	8.9	10.8	11.4	-	104

		360° 132.5ft	Max. 132.5ft	360° 146.7ft	Max. 146.7ft	360° 163.7ft	Max. 163.7ft	360° 165.4ft	Max. 165.4ft	360° 167.0ft	Max. 167.0ft	360° 179.1ft	Max. 179.1ft	360° 194.9ft	Max. 194.9ft	
1,000 lbs																ft
28	43.0	43.0	-	-	-	-	-	-	-	-	-	-	-	-	-	28
32	41.2	41.2	33.9	33.9	23.9	26.2	26.2	26.2	25.0	25.0	-	-	-	-	-	32
36	39.6	39.6	33.0	33.0	23.6	26.2	26.2	26.2	24.9	24.9	21.2	21.2	-	-	-	36
40	37.8	37.8	32.2	32.2	23.3	26.2	26.2	26.2	24.9	24.9	21.2	21.2	16.3	16.3	-	40
48	32.4	33.0	29.8	29.8	21.9	25.9	25.9	25.9	24.3	24.3	21.2	21.2	16.3	16.3	-	48
56	26.7	27.4	25.5	26.5	19.7	24.3	24.3	24.3	22.9	22.9	20.9	20.9	16.3	16.3	-	56
64	22.7	23.6	21.9	22.6	17.7	22.1	20.9	22.1	20.9	20.9	20.1	20.1	16.3	16.3	-	64
72	18.6	19.9	18.6	19.7	15.9	19.0	17.1	18.4	18.4	19.0	17.7	18.8	16.1	16.1	-	72
80	16.4	16.8	15.9	16.8	14.3	16.6	13.9	15.2	15.2	16.6	15.3	15.9	14.2	15.4	-	80
88	14.0	14.9	13.5	14.4	13.1	14.0	11.2	12.6	12.6	14.0	12.9	13.8	11.8	13.3	-	88
96	12.0	13.1	11.4	12.6	11.6	12.0	9.0	10.5	10.5	11.8	10.7	11.9	9.8	11.2	-	96
104	10.2	11.3	9.8	10.8	9.9	10.9	7.3	8.6	8.8	9.9	8.8	10.1	8.1	9.5	-	104
112	8.7	9.8	9.0	9.2	8.3	9.4	5.9	7.2	7.2	8.5	7.4	8.5	6.5	7.9	-	112
120	7.5	8.6	7.7	8.3	7.0	8.1	4.6	5.9	5.9	7.2	6.1	7.2	5.3	6.6	-	120
128	-	-	6.6	7.6	5.9	7.0	3.5	4.8	4.8	6.2	5.1	6.2	4.2	5.5	-	128
136	-	-	4.8	5.9	5.0	6.1	2.6	3.9	3.9	5.1	4.0	5.3	3.3	4.4	-	136
144	-	-	-	-	4.2	5.1	1.8	3.1	3.1	4.2	3.1	4.4	2.5	3.6	-	144
152	-	-	-	-	-	-	-	-	2.4	-	2.5	3.6	-	3.0	-	152
160	-	-	-	-	-	-	-	-	-	1.8	2.9	-	2.3	-	-	160

* Max. values are valid only for specific superstructure positions


Operation

HA
(HA60)

 9,500 lbs		 26.6 ft x 23.6 ft		360° / Max.*												ASME B30.5	
		360° 39.4ft	Max. 39.4ft	360° 53.5ft	Max. 53.5ft	360° 67.3ft	Max. 67.3ft	360° 81.4ft	Max. 81.4ft	360° 95.5ft	Max. 95.5ft	360° 109.6ft	Max. 109.6ft	360° 123.4ft	Max. 123.4ft		
1,000 lbs																ft	
10	156.5	161.2	157.1	157.4	153.0	153.0	130.5	130.5	-	-	-	-	-	-	-	10	
12	139.4	145.0	140.1	143.9	139.1	139.6	127.0	127.0	-	-	-	-	-	-	-	12	
14	125.3	130.8	126.0	131.4	125.7	128.3	121.9	121.9	103.8	103.8	-	-	-	-	-	14	
16	113.4	118.5	115.1	119.4	115.5	118.5	110.6	116.1	96.8	97.8	-	-	-	-	-	16	
18	101.4	105.5	103.7	106.6	102.5	107.3	95.7	105.9	85.2	92.3	69.8	69.8	-	-	-	18	
20	89.2	92.6	92.2	95.0	89.3	95.5	81.6	94.8	73.8	86.9	67.7	68.4	59.5	59.6	-	20	
24	66.3	74.8	70.1	76.8	68.8	77.2	67.0	76.6	61.9	75.4	57.0	65.6	52.0	55.1	-	24	
28	48.8	61.6	53.2	64.0	55.3	64.2	53.9	65.7	50.4	64.6	48.0	61.7	44.5	51.9	-	28	
32	-	-	42.0	54.3	43.3	56.2	43.3	56.0	42.5	55.5	41.3	54.4	38.6	49.5	-	32	
36	-	-	34.5	47.3	35.9	49.2	35.9	49.1	36.1	48.5	35.5	46.9	33.9	44.1	-	36	
40	-	-	-	-	29.5	42.9	31.1	42.8	30.8	42.1	30.2	40.1	30.0	39.4	-	40	
48	-	-	-	-	22.4	32.9	23.1	32.9	23.1	32.0	23.3	32.7	23.1	31.3	-	48	
56	-	-	-	-	17.0	20.4	17.8	25.7	18.1	26.8	17.8	26.3	17.6	25.2	-	56	
64	-	-	-	-	-	-	13.9	21.6	14.2	22.0	13.9	21.4	13.7	21.7	-	64	
72	-	-	-	-	-	-	11.1	17.0	11.3	18.2	11.3	18.3	10.6	17.9	-	72	
80	-	-	-	-	-	-	-	-	9.2	15.5	9.0	15.9	8.5	15.2	-	80	
88	-	-	-	-	-	-	-	-	7.6	9.2	7.2	13.5	6.7	13.4	-	88	
96	-	-	-	-	-	-	-	-	-	-	5.8	11.7	5.3	11.5	-	96	
104	-	-	-	-	-	-	-	-	-	-	4.5	8.9	4.1	10.1	-	104	

		360° 132.5ft	Max. 132.5ft	360° 146.7ft	Max. 146.7ft	360° 163.7ft	Max. 163.7ft	360° 165.4ft	Max. 165.4ft	360° 167.0ft	Max. 167.0ft	360° 179.1ft	Max. 179.1ft	360° 194.9ft	Max. 194.9ft	
1,000 lbs																ft
28	39.6	43.0	-	-	-	-	-	-	-	-	-	-	-	-	-	28
32	35.9	41.2	31.7	33.9	23.9	26.2	26.2	26.2	25.0	25.0	-	-	-	-	-	32
36	31.6	39.6	28.4	33.0	23.6	26.2	24.7	26.2	24.9	24.9	21.2	21.2	-	-	-	36
40	28.8	37.3	27.0	32.2	23.2	26.2	22.6	26.2	24.4	24.9	20.9	21.2	16.3	16.3	-	40
48	22.0	29.8	21.1	28.5	20.3	25.9	16.7	25.9	18.6	24.3	18.2	21.2	15.4	16.3	-	48
56	17.4	25.2	17.1	24.0	15.5	22.9	12.3	22.9	14.1	22.9	13.7	20.9	11.8	16.3	-	56
64	13.9	20.7	13.3	20.4	11.9	19.9	9.0	18.3	10.6	19.9	10.1	18.4	8.5	16.3	-	64
72	10.9	17.9	10.4	17.3	9.3	16.4	6.4	14.6	8.0	16.4	7.5	15.9	6.0	14.2	-	72
80	8.7	15.2	8.1	14.6	7.2	14.3	4.4	11.6	5.9	13.2	5.7	12.8	4.2	11.1	-	80
88	7.0	12.8	6.3	12.4	5.6	12.3	2.9	9.4	4.4	11.0	4.2	10.5	2.9	8.8	-	88
96	5.5	11.1	4.9	10.8	4.2	10.3	-	7.5	3.0	8.9	2.9	8.5	-	7.1	-	96
104	4.3	9.5	3.7	9.8	3.0	8.6	-	5.9	1.9	7.4	1.9	7.0	-	5.5	-	104
112	3.3	8.1	2.6	8.1	2.0	7.2	-	4.8	-	6.1	-	5.7	-	4.3	-	112
120	-	6.6	1.9	6.8	-	6.1	-	3.7	-	5.0	-	4.7	-	3.3	-	120
128	-	-	-	5.7	-	5.1	-	2.6	-	4.1	-	3.9	-	2.5	-	128
136	-	-	-	4.0	-	4.1	-	1.7	-	3.1	-	3.0	-	1.7	-	136
144	-	-	-	-	-	3.3	-	-	-	2.2	-	2.4	-	-	-	144

* Max. values are valid only for specific superstructure positions

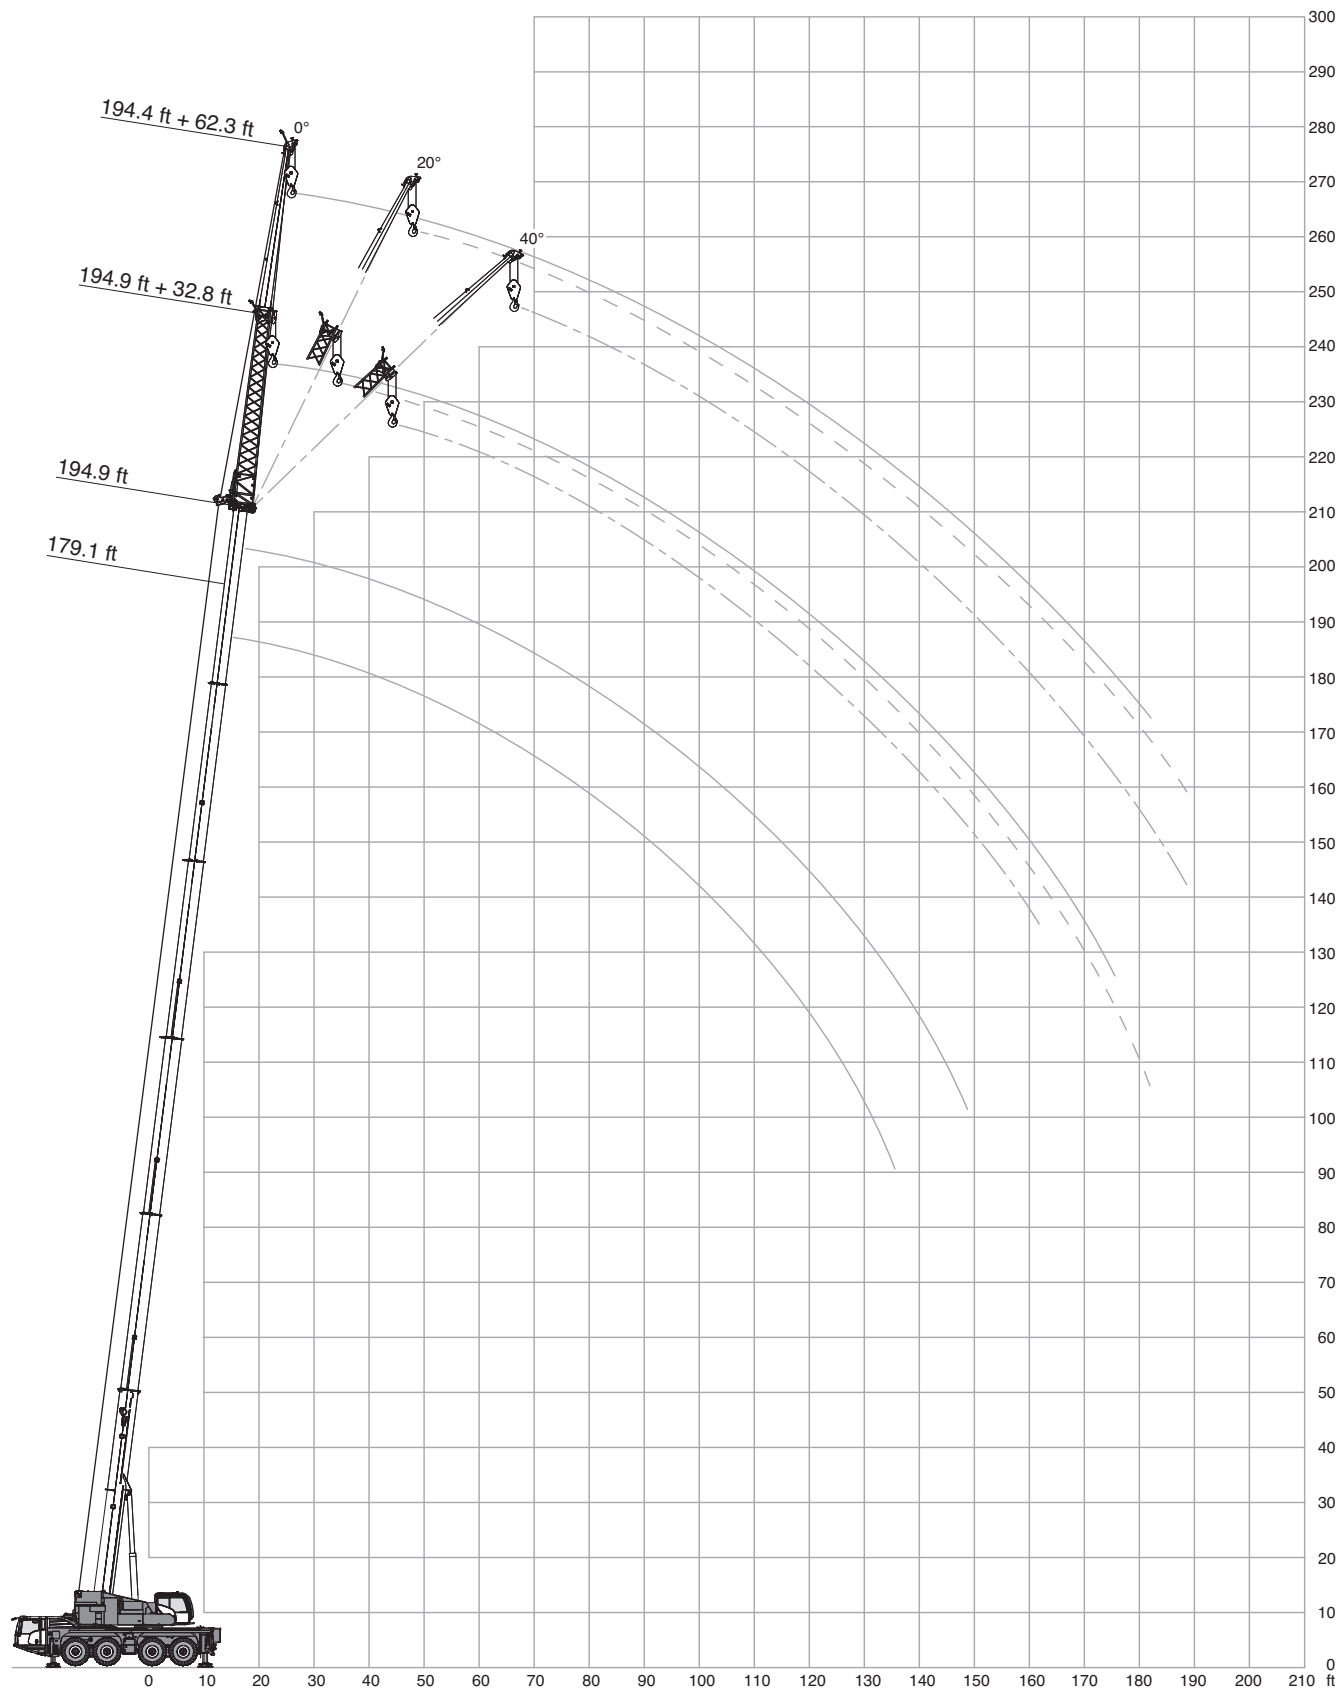

Operation

HAV
(HA60)

54,000 lbs								 26.6 ft x 23.6 ft		360°								ASME B30.5	
 194.9 ft								 179.1 ft											
		32.8 ft			62.3 ft					32.8 ft			62.3 ft						
		0°	20°	40°	0°	20°	40°*			0°	20°	40°	0°	20°	40°				
ft		1,000 lbs						ft		1,000 lbs									
48		8.4	-	-	-	-	-	40		11.0	-	-	-	-	-				
56		8.4	-	-	4.9	-	-	48		11.0	-	-	6.4	-	-				
64		8.4	8.4	-	4.9	-	-	56		11.0	-	-	6.4	-	-				
72		8.4	8.4	-	4.9	-	-	64		11.0	11.0	-	6.4	-	-				
80		8.4	8.4	8.4	4.9	4.9	-	72		11.0	11.0	11.0	6.4	-	-				
88		8.4	8.4	8.4	4.9	4.9	-	80		11.0	11.0	11.0	6.4	6.4	-				
96		8.4	8.4	8.2	4.9	4.9	-	88		11.0	11.0	11.0	6.4	6.4	-				
104		8.4	8.0	7.8	4.9	4.9	5.1	96		10.7	11.0	10.7	6.4	6.4	6.4				
112		7.6	7.7	7.3	4.9	4.9	5.1	104		9.6	10.5	10.4	6.4	6.4	6.4				
120		6.4	7.0	6.9	4.9	4.9	4.9	112		8.1	8.9	9.6	6.4	6.4	6.2				
128		5.3	5.9	6.3	4.6	4.7	4.5	120		7.1	7.4	8.0	6.1	6.4	6.0				
136		4.2	4.9	5.3	3.9	4.5	4.2	128		6.1	6.3	6.5	5.5	6.3	5.8				
144		3.1	3.8	4.2	3.1	4.2	4.0	136		5.0	5.5	5.8	4.7	5.7	5.6				
152		2.3	3.0	3.2	2.3	3.4	3.7	144		4.0	4.5	4.9	4.2	4.7	5.5				
160		-	2.2	2.4	-	2.6	3.4	152		3.2	3.6	3.9	3.2	3.8	4.5				
168		-	-	-	-	-	2.7	160		2.5	2.8	3.1	2.6	3.4	3.6				
176		-	-	-	-	-	1.9	168		-	-	-	-	2.8	3.0				
								176		-	-	-	-	2.1	2.5				

 109.6 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lbs					
20		29.1	-	-	-	-	-
24		28.7	-	-	14.7	-	-
28		28.2	-	-	14.6	-	-
32		27.7	-	-	14.4	-	-
36		27.1	24.4	-	14.2	-	-
40		26.6	23.2	19.1	14.1	-	-
48		25.4	21.1	18.0	13.8	-	-
56		23.9	19.5	16.8	13.4	12.1	-
64		21.8	18.1	16.0	13.1	11.6	-
72		19.9	16.8	15.2	12.8	11.0	8.6
80		17.7	15.7	14.5	12.3	10.3	8.3
88		15.0	14.9	13.9	11.6	9.7	8.1
96		13.2	13.4	13.4	10.8	9.2	7.9
104		11.7	11.7	12.0	10.2	8.9	7.7
112		10.0	10.5	-	9.4	8.3	7.7
120		8.8	8.9	-	8.7	7.9	7.4
128		8.2	4.5	-	7.8	7.6	7.3
136		4.1	-	-	6.9	7.1	7.3
144		-	-	-	5.8	6.4	2.9
152		-	-	-	5.0	4.5	-
160		-	-	-	2.3	-	-

 *191.9 ft

 39.4 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
		ft 1,000 lbs					
10		29.1	-	-	21.1	-	-
12		29.1	-	-	20.9	-	-
14		29.1	-	-	20.8	-	-
16		29.1	29.1	-	20.6	-	-
18		29.1	29.1	-	20.3	-	-
20		29.1	28.9	-	20.0	-	-
24		29.1	26.6	-	19.2	-	-
28		29.1	24.5	20.1	18.5	-	-
32		28.9	22.8	19.2	17.6	-	-
36		26.9	21.5	18.4	16.7	13.5	-
40		24.6	20.3	17.8	15.7	12.7	-
48		21.1	18.3	16.9	13.8	11.6	-
56		18.5	17.1	-	12.2	10.4	9.2
64		-	-	-	11.0	9.6	8.7
72		-	-	-	9.9	9.1	8.2
80		-	-	-	9.2	8.6	-
88		-	-	-	8.6	-	-

Operation

HAV

(HA60)

 42,500 lbs								 26.6 ft x 23.6 ft							
 194.9 ft															
		32.8 ft			62.3 ft					32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°*			0°	20°	40°			
ft		1,000 lbs						ft		1,000 lbs					
48		8.4	-	-	-	-	-	40		11.0	-	-	-	-	-
56		8.4	-	-	4.9	-	-	48		11.0	-	-	6.4	-	-
64		8.4	8.4	-	4.9	-	-	56		11.0	-	-	6.4	-	-
72		8.4	8.4	-	4.9	-	-	64		11.0	11.0	-	6.4	-	-
80		8.4	8.4	8.4	4.9	4.9	-	72		11.0	11.0	11.0	6.4	-	-
88		8.4	8.4	8.4	4.9	4.9	-	80		11.0	11.0	11.0	6.4	6.4	-
96		8.0	8.4	8.2	4.9	4.9	-	88		10.6	11.0	11.0	6.4	6.4	-
104		6.8	7.6	7.8	4.9	4.9	5.1	96		9.1	10.1	10.6	6.4	6.4	6.4
112		5.4	6.3	7.2	4.8	4.9	5.1	104		8.1	8.4	9.2	6.4	6.4	6.4
120		4.2	5.0	5.7	3.7	4.8	4.9	112		6.6	7.2	7.4	5.5	6.4	6.2
128		3.3	4.0	4.6	2.8	4.3	4.5	120		5.4	6.1	6.4	5.0	5.9	6.0
136		2.4	3.0	3.5	1.9	3.3	4.2	128		4.2	4.8	5.4	4.1	4.8	5.7
144		1.6	2.2	2.7	-	2.5	3.8	136		3.3	3.9	4.2	3.3	4.2	5.0
152		-	-	-	-	-	3.0	144		2.5	2.9	3.3	2.5	3.6	4.0
160		-	-	-	-	-	2.2	152		-	2.1	2.3	-	2.8	3.4
								160		-	-	-	-	2.0	2.6

 109.6 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lbs					
20		29.1	-	-	-	-	-
24		28.7	-	-	14.7	-	-
28		28.2	-	-	14.6	-	-
32		27.7	-	-	14.4	-	-
36		27.1	24.4	-	14.2	-	-
40		26.6	23.2	19.1	14.1	-	-
48		25.4	21.1	18.0	13.8	-	-
56		23.9	19.5	16.8	13.4	12.1	-
64		21.7	18.1	16.0	13.1	11.6	-
72		18.6	16.8	15.2	12.8	11.0	8.6
80		15.9	15.5	14.5	12.3	10.3	8.3
88		13.3	13.8	13.7	11.6	9.7	8.1
96		11.2	11.9	12.3	10.8	9.2	7.9
104		9.8	9.9	10.4	9.8	8.9	7.7
112		8.5	8.8	-	8.5	8.3	7.7
120		7.8	7.8	-	7.2	7.8	7.4
128		7.2	4.5	-	6.4	6.9	7.2
136		4.1	-	-	5.7	5.9	6.3
144		-	-	-	4.9	5.3	2.9
152		-	-	-	4.6	3.2	-
160		-	-	-	2.3	-	-

 *191.9 ft


Operation

HAV
(HA60)

9,500 lbs								26.6 ft x 23.6 ft		360°								ASME B30.5	
194.9 ft								179.1 ft											
		32.8 ft			62.3 ft					32.8 ft			62.3 ft						
		0°	20°	40°	0°	20°	40°*			0°	20°	40°	0°	20°	40°				
ft	1,000 lbs							ft	1,000 lbs										
48	8.4	-	-	-	-	-	-	40	11.0	-	-	-	-	-	-				
56	8.4	-	-	-	4.9	-	-	48	11.0	-	-	6.4	-	-	-				
64	6.7	8.2	-	-	4.9	-	-	56	10.4	-	-	6.4	-	-	-				
72	4.5	6.2	-	-	3.6	-	-	64	8.5	9.9	-	6.4	-	-	-				
80	2.7	4.2	5.7	-	-	4.6	-	72	6.0	7.8	9.1	5.3	-	-	-				
88	-	2.6	3.9	-	-	3.2	-	80	4.2	5.7	6.9	3.5	5.8	-	-				
96	-	-	2.4	-	-	-	-	88	2.7	4.0	5.0	2.2	4.5	-	-				
104	-	-	-	-	-	-	2.8	96	-	2.6	3.5	-	3.1	5.0	-				
								104	-	-	2.3	-	1.9	3.7	-				
								112	-	-	-	-	-	2.4	-				

109.6 ft								39.4 ft							
		32.8 ft			62.3 ft					32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°			0°	20°	40°	0°	20°	40°
ft	1,000 lbs							ft	1,000 lbs						
20	29.1	-	-	-	-	-	-	10	29.1	-	-	21.1	-	-	-
24	28.7	-	-	-	14.7	-	-	12	29.1	-	-	20.9	-	-	-
28	28.2	-	-	-	14.6	-	-	14	29.1	-	-	20.8	-	-	-
32	27.7	-	-	-	14.4	-	-	16	29.1	29.1	-	20.6	-	-	-
36	27.0	24.4	-	-	14.2	-	-	18	29.1	29.1	-	20.3	-	-	-
40	26.2	23.2	19.1	-	14.1	-	-	20	29.1	28.9	-	20.0	-	-	-
48	21.3	20.8	18.0	-	13.8	-	-	24	29.1	26.6	-	19.2	-	-	-
56	17.3	17.8	16.8	-	13.4	12.1	-	28	29.1	24.5	20.1	18.5	-	-	-
64	14.0	14.6	15.0	-	12.3	11.6	-	32	28.9	22.8	19.2	17.6	-	-	-
72	11.1	11.9	12.4	-	10.8	11.0	8.6	36	26.9	21.5	18.4	16.7	13.5	-	-
80	8.9	9.8	10.3	-	9.2	9.9	8.3	40	24.6	20.3	17.8	15.7	12.7	-	-
88	7.2	7.8	8.4	-	7.5	8.4	8.1	48	21.1	18.3	16.9	13.8	11.6	-	-
96	5.6	6.2	6.7	-	5.9	6.9	7.7	56	17.6	16.9	-	12.2	10.4	9.2	-
104	4.3	5.0	5.2	-	4.8	5.9	6.4	64	-	-	-	11.0	9.6	8.7	-
112	3.3	3.7	-	-	3.7	4.8	5.5	72	-	-	-	9.9	9.1	8.2	-
120	2.5	2.8	-	-	2.9	3.7	4.4	80	-	-	-	9.2	8.6	-	-
128	-	2.0	-	-	2.1	2.8	3.3	88	-	-	-	8.5	-	-	-
136	-	-	-	-	-	1.9	2.4								
144	-	-	-	-	-	-	1.6								

 *191.9 ft

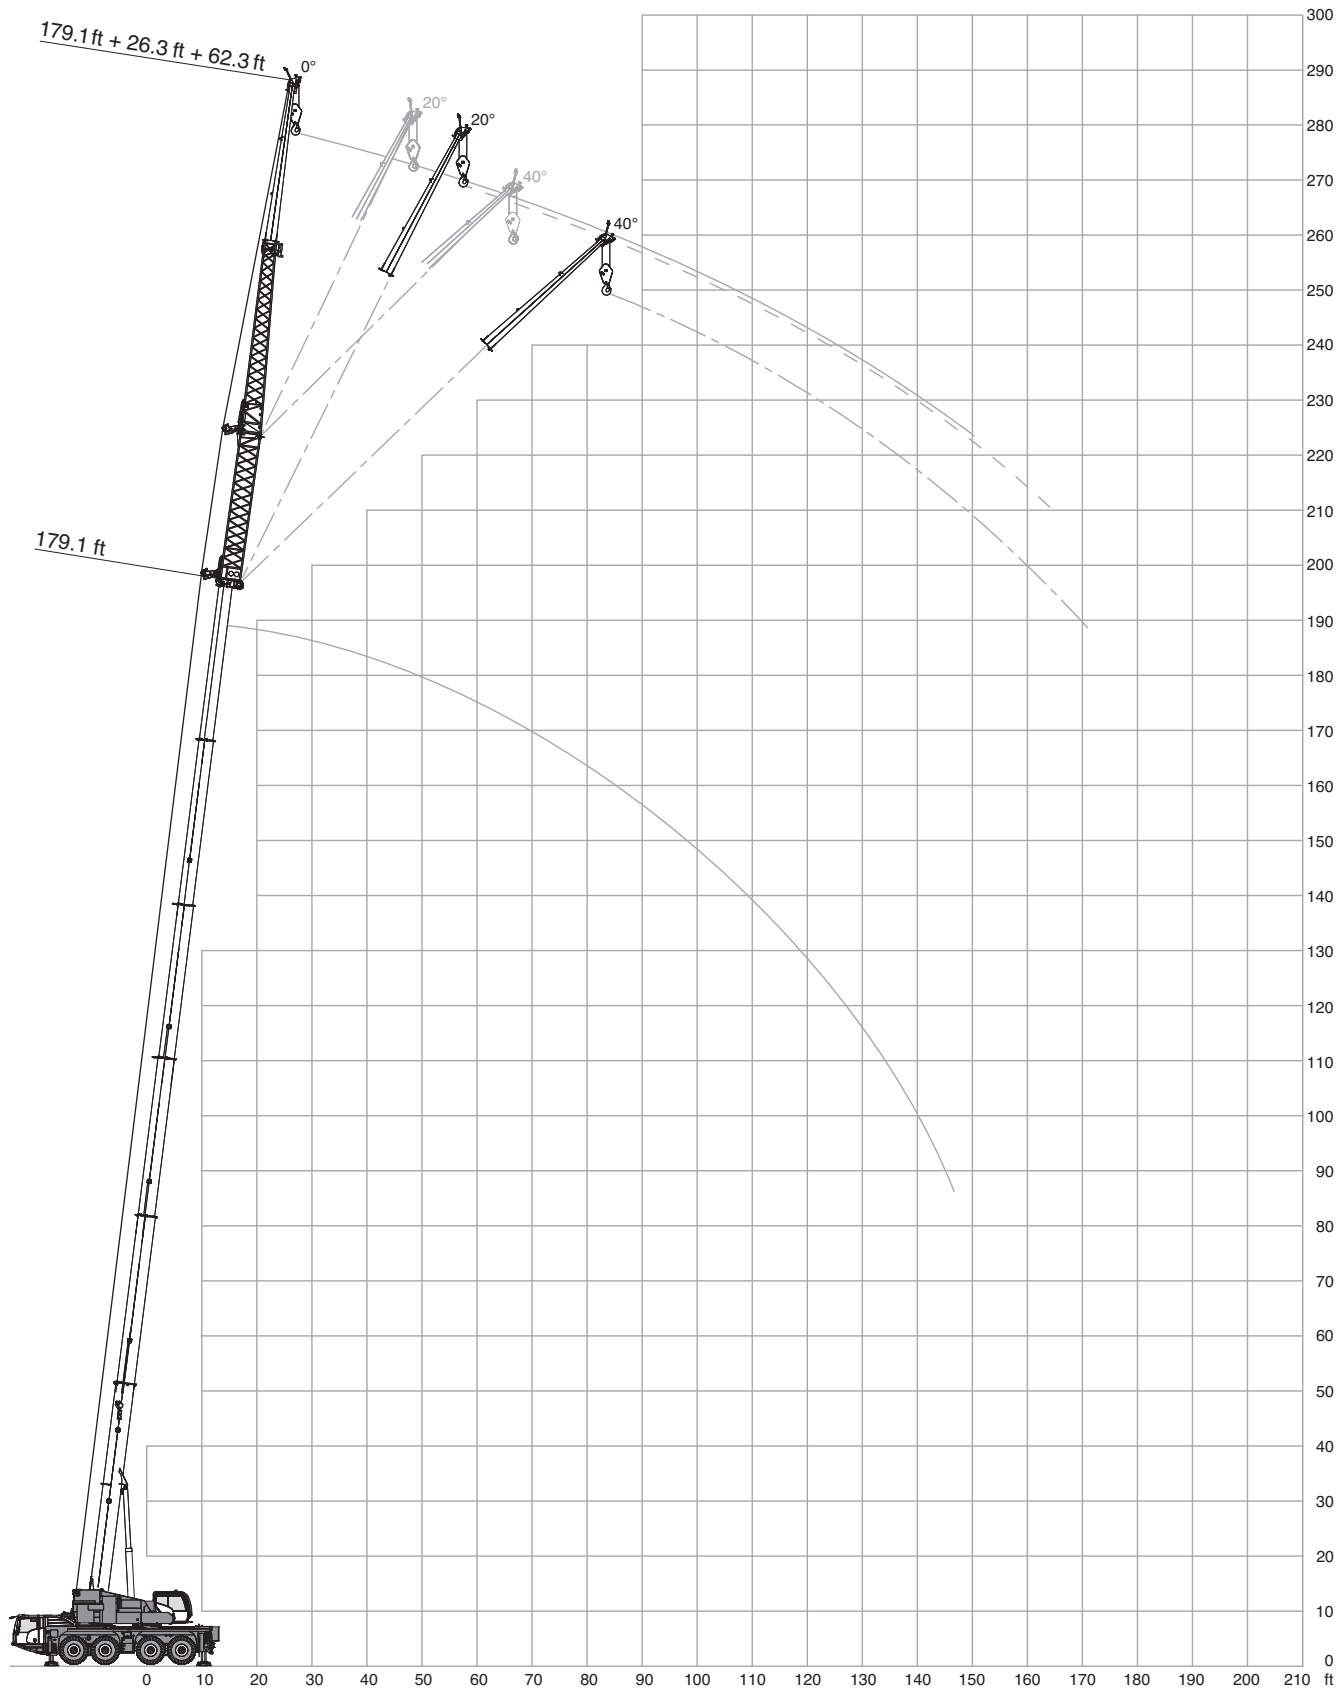

Operation

HAV-VA

(HA60)

 54,000 lbs		 26.6 ft x 23.6 ft		360°		ASME B30.5	
 194.9 ft				 179.1 ft			
		26.3 ft					
		0°	0°	0°	20°	40°	
		62.3 ft					
		0°	20°	40°*	0°	0°	
ft		1,000 lbs					
56	4.6	-	-	-	-	-	
64	4.6	-	-	-	-	-	
72	4.6	4.6	-	-	-	-	
80	4.6	4.6	5.1	-	-	-	
88	4.6	4.6	5.1	-	-	-	
96	4.6	4.6	5.1	-	-	-	
104	4.6	4.6	5.1	-	-	-	
112	4.6	4.6	5.0	-	-	-	
120	4.4	4.6	4.6	-	-	-	
128	3.5	4.2	4.2	-	-	-	
136	2.6	3.5	3.8	-	-	-	
144	1.8	2.5	3.3	-	-	-	
152	-	-	2.5	-	-	-	

 179.1 ft							
		26.3 ft					
		0°	0°	0°	20°	40°	
		62.3 ft					
		0°	20°	40°	0°	0°	
ft		1,000 lbs					
48	6.6	-	-	-	-	-	
56	6.6	-	-	-	-	-	
64	6.6	-	-	-	-	-	
72	6.6	6.6	-	-	-	-	
80	6.6	6.6	6.6	6.6	6.6	-	
88	6.5	6.6	6.6	6.6	6.6	-	
96	6.4	6.5	6.6	6.5	6.5	6.5	
104	6.4	6.4	6.6	6.4	6.0	6.0	
112	6.1	6.2	6.4	6.2	5.7	5.7	
120	5.3	6.0	6.3	6.1	5.7	5.7	
128	4.2	5.1	5.7	5.6	5.4	5.4	
136	3.8	4.0	4.7	4.7	5.1	5.1	
144	2.9	3.3	3.6	3.6	4.2	4.2	
152	2.1	2.8	3.0	2.5	3.2	3.2	
160	-	-	2.2	-	2.4	2.4	

 109.6 ft						
 	26.3 ft					
	0°	0°	0°	20°	40°	
	62.3 ft					
	0°	20°	40°	0°	0°	
ft	1,000 lbs					
24	18.4	-	-	-	-	
28	18.1	-	-	-	-	
32	17.7	-	-	-	-	
36	17.4	-	-	-	-	
40	17.2	16.9	-	-	-	
48	16.5	16.0	14.5	13.9	-	
56	15.9	15.0	13.5	13.1	-	
64	15.2	13.9	12.6	12.1	-	
72	14.1	12.6	11.7	11.3	9.5	
80	13.0	11.7	10.9	10.5	9.0	
88	11.8	10.8	10.2	9.7	8.5	
96	10.8	9.9	9.6	9.2	8.1	
104	10.0	9.3	9.1	8.7	7.7	
112	9.0	8.8	8.6	8.1	7.5	
120	7.7	8.1	7.9	7.7	7.2	
128	6.8	7.2	7.2	7.1	6.9	
136	5.8	6.0	2.3	6.2	6.5	
144	4.7	4.9	-	5.1	-	
152	4.3	-	-	-	-	

 *191.9 ft

 39.4 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
ft		1,000 lbs				
10		29.1	-	-	-	-
12		29.1	-	-	-	-
14		29.1	-	-	-	-
16		29.1	-	-	-	-
18		28.9	-	-	-	-
20		28.4	-	-	-	-
24		25.6	21.9	-	-	-
28		23.2	20.0	-	-	-
32		20.9	18.4	16.8	16.3	-
36		19.2	17.1	15.7	15.2	-
40		17.6	15.9	14.6	14.2	-
48		15.2	13.9	13.1	12.7	11.0
56		13.4	12.4	11.9	11.4	10.0
64		11.8	11.2	10.8	10.4	9.4
72		10.6	10.2	10.2	9.5	8.8
80		9.5	9.4	-	9.0	-

Operation

HAV-VA

(HA60)

42,500 lbs		26.6 ft x 23.6 ft		360°		ASME B30.5				
194.9 ft				179.1 ft						
		26.3 ft								
		0°	0°	0°	20°	40°				
		62.3 ft								
		0°	20°	40°*	0°	0°				
		1,000 lbs								
		ft								
56	4.6	-	-	-	-	48	6.6	-	-	-
64	4.6	-	-	-	-	56	6.6	-	-	-
72	4.6	4.6	-	-	-	64	6.6	-	-	-
80	4.6	4.6	5.1	-	-	72	6.6	6.6	-	-
88	4.6	4.6	5.1	-	-	80	6.6	6.6	6.6	6.6
96	4.6	4.6	5.1	-	-	88	6.5	6.6	6.6	6.6
104	4.6	4.6	5.1	-	-	96	6.4	6.5	6.6	6.5
112	3.7	4.6	5.0	-	-	104	5.6	6.4	6.6	6.4
120	2.6	3.5	4.4	-	-	112	5.0	5.4	6.3	6.1
128	-	2.5	3.4	-	-	120	3.9	4.4	5.0	4.8
136	-	-	2.4	-	-	128	2.9	3.6	4.1	3.7
						136	1.9	2.7	3.3	2.7
						144	-	1.8	2.5	1.8

109.6 ft				39.4 ft						
		26.3 ft								
		0°	0°	0°	20°	40°				
		62.3 ft								
		0°	20°	40°	0°	0°				
		1,000 lbs								
		ft								
24	18.4	-	-	-	-	10	29.1	-	-	-
28	18.1	-	-	-	-	12	29.1	-	-	-
32	17.7	-	-	-	-	14	29.1	-	-	-
36	17.4	-	-	-	-	16	29.1	-	-	-
40	17.2	16.9	-	-	-	18	28.9	-	-	-
48	16.5	16.0	14.5	13.9	-	20	28.4	-	-	-
56	15.9	15.0	13.5	13.1	-	24	25.6	21.9	-	-
64	15.2	13.9	12.6	12.1	-	28	23.2	20.0	-	-
72	14.1	12.6	11.7	11.3	9.5	32	20.9	18.4	16.8	16.3
80	13.0	11.7	10.9	10.5	9.0	36	19.2	17.1	15.7	15.2
88	11.6	10.8	10.2	9.7	8.5	40	17.6	15.9	14.6	14.2
96	10.5	9.9	9.6	9.2	8.1	48	15.2	13.9	13.1	12.7
104	9.0	9.1	9.1	8.7	7.7	56	13.4	12.4	11.9	11.4
112	7.4	8.1	8.3	7.9	7.5	64	11.8	11.2	10.8	10.4
120	6.2	6.7	7.0	7.0	7.1	72	10.6	10.2	10.2	9.5
128	5.5	5.5	5.6	5.7	6.3	80	9.5	9.4	-	9.0
136	4.7	5.0	2.3	5.0	5.0					
144	4.2	4.2	-	4.2	-					
152	3.7	-	-	-	-					

 *191.9 ft

Operation

HAV-VA

(HA60)

9,500 lbs		26.6 ft x 23.6 ft		360°		ASME B30.5	
 194.9 ft				 179.1 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		62.3 ft		62.3 ft			
		0°	20°	40°*	0°	0°	
ft	1,000 lbs						
56	4.6	-	-	-	-	-	
64	4.3	-	-	-	-	-	
72	2.5	4.4	-	-	-	-	
80	-	-	4.3	-	-	-	
88	-	-	2.5	-	-	-	

 109.6 ft		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		62.3 ft		62.3 ft			
		0°	20°	40°	0°	0°	
ft	1,000 lbs						
24	18.4	-	-	-	-	-	
28	18.1	-	-	-	-	-	
32	17.7	-	-	-	-	-	
36	17.4	-	-	-	-	-	
40	17.2	16.9	-	-	-	-	
48	16.4	16.0	14.5	13.9	-	-	
56	14.6	14.8	13.5	13.1	-	-	
64	12.3	13.2	12.6	12.1	-	-	
72	9.9	11.1	11.5	11.0	9.5	-	
80	8.3	8.7	9.8	9.6	9.0	-	
88	6.5	7.3	7.5	7.5	8.1	-	
96	4.9	5.8	6.4	6.1	6.9	-	
104	3.7	4.4	4.8	4.8	5.5	-	
112	2.6	3.2	3.7	3.5	4.3	-	
120	-	2.2	2.6	2.5	3.1	-	
128	-	-	-	-	2.1	-	

 39.4 ft		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		62.3 ft		62.3 ft			
		0°	20°	40°	0°	0°	
ft	1,000 lbs						
10	29.1	-	-	-	-	-	
12	29.1	-	-	-	-	-	
14	29.1	-	-	-	-	-	
16	29.1	-	-	-	-	-	
18	28.9	-	-	-	-	-	
20	28.4	-	-	-	-	-	
24	25.6	21.9	-	-	-	-	
28	23.2	20.0	-	-	-	-	
32	20.9	18.4	16.8	16.3	-	-	
36	19.2	17.1	15.7	15.2	-	-	
40	17.6	15.9	14.6	14.2	-	-	
48	15.2	13.9	13.1	12.7	11.0	-	
56	13.4	12.4	11.9	11.4	10.0	-	
64	11.8	11.2	10.8	10.4	9.4	-	
72	10.6	10.2	10.2	9.5	8.8	-	
80	9.4	9.3	-	9.0	-	-	

 *191.9 ft

Operation

HAV-VA

(HA60)

54,000 lbs		26.6 ft x 23.6 ft		360°		ASME B30.5	
 179.1 ft				 109.6 ft			
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		32.8 ft		32.8 ft			
		0°	20°	40°*	0°*	0°**	
ft		1,000 lbs					
56	3.5	-	-	-	-	-	
64	3.5	-	-	-	-	-	
72	3.5	-	-	-	-	-	
80	3.5	3.5	-	-	-	-	
88	3.5	3.5	-	5.0	-	-	
96	3.5	3.5	-	4.9	-	-	
104	3.3	3.5	5.1	4.9	-	-	
112	3.3	3.3	4.9	4.6	4.6	-	
120	3.3	3.3	4.9	4.6	4.4	-	
128	3.3	3.3	4.9	4.6	4.3	-	
136	2.8	3.3	4.9	4.5	4.2	-	
144	2.0	3.1	4.6	4.0	4.2	-	
152	-	2.5	3.6	3.2	3.9	-	
160	-	-	2.7	2.2	3.3	-	

 39.4 ft							
		26.3 ft		26.3 ft			
		0°	0°	0°	20°	40°	
		32.8 ft		32.8 ft			
		0°	20°	40°	0°	0°	
ft		1,000 lbs					
14	17.2	-	-	-	-	-	
16	17.2	-	-	-	-	-	
18	17.1	-	-	-	-	-	
20	16.9	-	-	-	-	-	
24	16.3	-	-	-	-	-	
28	15.5	-	-	-	-	-	
32	14.7	-	-	-	-	-	
36	13.9	-	-	-	-	-	
40	13.1	11.8	-	-	-	-	
48	11.6	10.5	-	9.6	-	-	
56	10.2	9.2	8.7	8.6	-	-	
64	9.0	8.3	7.9	7.7	-	-	
72	8.0	7.5	7.1	7.1	-	-	
80	7.2	6.7	6.5	6.3	5.6	-	
88	6.6	6.2	6.0	5.8	5.2	-	
96	5.9	5.7	5.6	5.2	4.8	-	
104	5.4	5.3	-	4.9	4.6	-	
112	4.8	-	-	-	-	-	

 *165.4 ft **151.6 ft							
--	--	--	--	--	--	--	--



109.6 ft



26.3 ft



32.8 ft



ft

1,000 lbs



32

36

40

48

56

64

72

80

88

96

104

112

120

128

136

144

152

160

168

176

10.1

10.0

9.9

9.6

9.4

9.1

8.8

8.6

8.3

7.9

7.3

6.8

6.3

5.9

5.4

5.0

4.9

4.8

4.7

4.6

4.5

4.4

4.3

4.2

4.1

4.0

3.6

2.8

2.5

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

Operation

HAV-VA

(HA60)

42,500 lbs		26.6 ft x 23.6 ft		360°		ASME B30.5	
179.1 ft				109.6 ft			
		26.3 ft					
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°	40°*	0°*	0°**	
		1,000 lbs					
		ft					
56	3.5	-	-	-	-	-	
64	3.5	-	-	-	-	-	
72	3.5	-	-	-	-	-	
80	3.5	3.5	-	-	-	-	
88	3.5	3.5	-	5.0	-	-	
96	3.5	3.5	-	4.9	-	-	
104	3.3	3.5	5.1	4.9	-	-	
112	3.3	3.3	4.9	4.6	4.6	-	
120	2.8	3.3	4.9	4.6	4.4	-	
128	-	3.2	4.7	4.2	4.3	-	
136	-	2.4	4.0	3.1	4.2	-	
144	-	1.6	2.9	2.2	4.0	-	
152	-	-	-	-	2.9	-	

39.4 ft							
		26.3 ft					
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°	40°	0°	0°	
		1,000 lbs					
		ft					
14	17.2	-	-	-	-	-	
16	17.2	-	-	-	-	-	
18	17.1	-	-	-	-	-	
20	16.9	-	-	-	-	-	
24	16.3	-	-	-	-	-	
28	15.5	-	-	-	-	-	
32	14.7	-	-	-	-	-	
36	13.9	-	-	-	-	-	
40	13.1	11.8	-	-	-	-	
48	11.6	10.5	-	9.6	-	-	
56	10.2	9.2	8.7	8.6	-	-	
64	9.0	8.3	7.9	7.7	-	-	
72	8.0	7.5	7.1	7.1	-	-	
80	7.2	6.7	6.5	6.3	5.6	-	
88	6.6	6.2	6.0	5.8	5.2	-	
96	5.9	5.7	5.6	5.2	4.8	-	
104	5.4	5.3	-	4.9	4.6	-	
112	4.8	-	-	-	-	-	

*165.4 ft **151.6 ft							
-------------------------	--	--	--	--	--	--	--

32	10.1	-	-	-	-
36	10.0	-	-	-	-
40	9.9	-	-	-	-
48	9.6	-	-	-	-
56	9.4	-	-	-	-
64	9.1	8.9	-	-	-
72	8.8	8.4	-	7.5	-
80	8.6	7.9	7.0	7.2	-
88	8.3	7.4	6.7	6.7	5.4
96	7.9	7.0	6.5	6.3	5.2
104	7.3	6.6	6.2	6.0	4.9
112	6.8	6.2	5.7	5.7	4.8
120	6.2	5.8	5.4	5.2	4.6
128	5.3	5.4	5.2	5.0	4.4
136	4.4	5.1	4.9	4.7	4.2
144	3.8	4.4	4.6	4.4	4.2
152	3.4	3.7	3.9	3.6	3.9
160	2.7	3.1	3.2	3.1	3.4
168	-	2.5	-	2.6	-
176	-	1.9	-	2.1	-

Operation

HAV-VA

(HA60)

9,500 lbs		26.6 ft x 23.6 ft		360°		ASME B30.5	
179.1 ft				109.6 ft			
		26.3 ft					1,000 lbs
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°	40°*	0°*	0°**	
ft							
56	3.5	-	-	-	-	-	
64	3.5	-	-	-	-	-	
72	2.7	-	-	-	-	-	
80	-	3.4	-	-	-	-	
88	-	2.4	-	3.9	-	-	
96	-	-	-	2.4	-	-	
104	-	-	2.2	-	-	-	
112	-	-	-	-	2.8	-	

39.4 ft							
		26.3 ft					1,000 lbs
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°	40°	0°	0°	
ft							
14	17.2	-	-	-	-	-	
16	17.2	-	-	-	-	-	
18	17.1	-	-	-	-	-	
20	16.9	-	-	-	-	-	
24	16.3	-	-	-	-	-	
28	15.5	-	-	-	-	-	
32	14.7	-	-	-	-	-	
36	13.9	-	-	-	-	-	
40	13.1	11.8	-	-	-	-	
48	11.6	10.5	-	9.6	-	-	
56	10.2	9.2	8.7	8.6	-	-	
64	9.0	8.3	7.9	7.7	-	-	
72	8.0	7.5	7.1	7.1	-	-	
80	7.2	6.7	6.5	6.3	5.6	-	
88	6.6	6.2	6.0	5.8	5.2	-	
96	5.9	5.7	5.6	5.2	4.8	-	
104	5.4	5.3	-	4.9	4.6	-	
112	4.8	-	-	-	-	-	


*165.4 ft ** 151.6 ft							
--------------------------	--	--	--	--	--	--	--

109.6 ft							
		26.3 ft					1,000 lbs
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°	40°	0°	0°	
ft							
32	10.1	-	-	-	-	-	
36	10.0	-	-	-	-	-	
40	9.9	-	-	-	-	-	
48	9.6	-	-	-	-	-	
56	9.4	-	-	-	-	-	
64	9.1	8.9	-	-	-	-	
72	8.4	8.4	-	7.5	-	-	
80	7.2	7.8	7.0	7.2	-	-	
88	6.0	7.1	6.7	6.7	5.4	-	
96	4.8	6.0	6.5	6.0	5.2	-	
104	3.7	4.7	6.0	5.2	4.9	-	
112	2.8	4.1	4.8	3.9	4.8	-	
120	-	3.1	3.5	2.9	3.9	-	
128	-	2.1	2.5	2.1	2.6	-	

Notes

Operation

MS
(HA60)

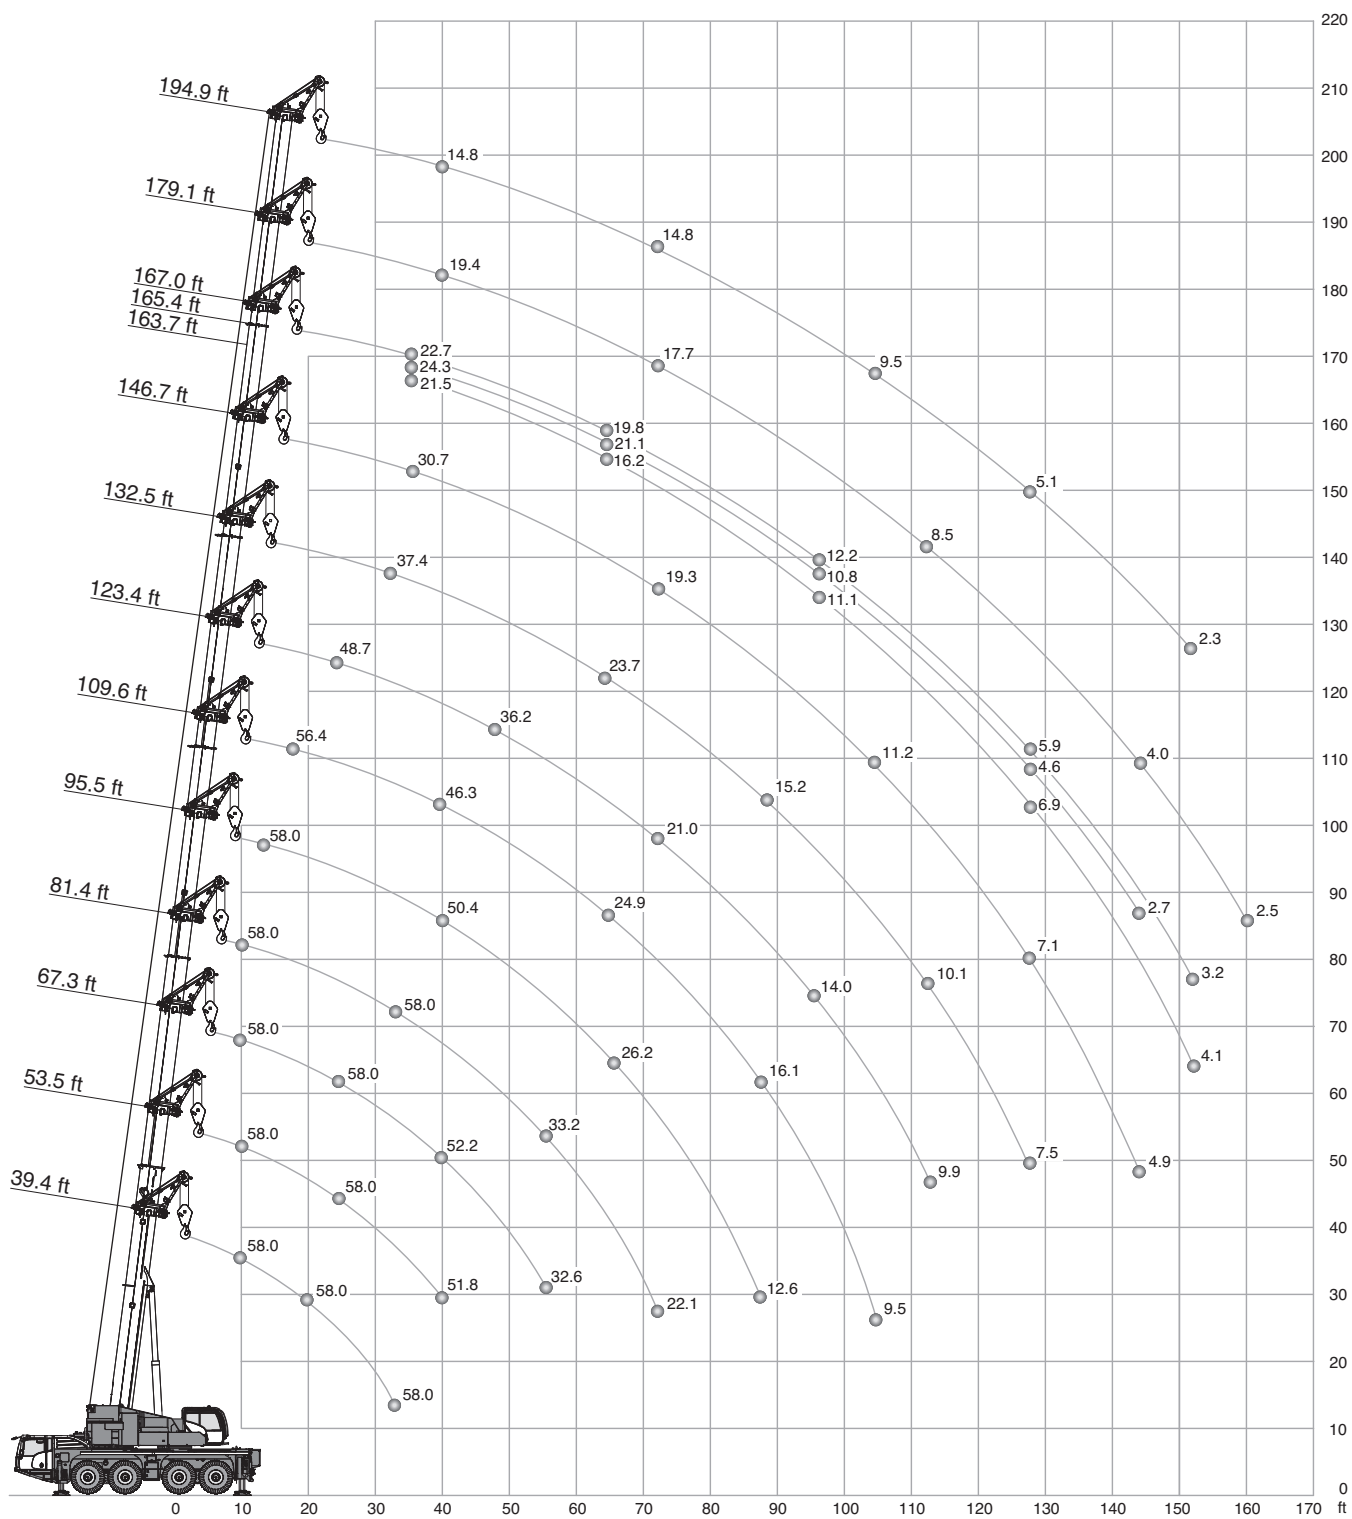

Operation

MS

(HA60)

 54,000 lbs		 26.6 ft x 23.6 ft		360°		ASME B30.5													
		39.4	53.5	67.3	81.4	95.5	109.6	(ft)		123.4	132.5	146.7	163.7	165.4	167.0	179.1	194.9		
ft		(ft)																	ft
		1,000 lbs																	
10		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	-	10	
12		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	-	12	
14		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	14	
16		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	16	
18		58.0	58.0	58.0	58.0	58.0	56.4	-	-	-	-	-	-	-	-	-	-	18	
20		58.0	58.0	58.0	58.0	58.0	56.0	-	-	-	-	-	-	-	-	-	-	20	
24		58.0	58.0	58.0	58.0	58.0	53.5	48.7	-	-	-	-	-	-	-	-	-	24	
28		58.0	58.0	58.0	58.0	58.0	51.4	46.7	-	-	-	-	-	-	-	-	-	28	
32		58.0	58.0	58.0	58.0	58.0	49.7	44.8	37.4	-	-	-	-	-	-	-	-	32	
36		-	55.4	55.6	55.3	54.8	48.1	43.0	36.5	30.7	21.5	24.3	22.7	-	-	-	-	36	
40		-	51.8	52.2	51.5	50.4	46.3	41.1	35.6	29.7	21.3	24.2	22.7	19.4	14.8	-	-	40	
48		-	-	40.6	40.0	41.3	39.9	36.2	31.9	28.3	19.8	23.9	22.4	19.4	14.8	-	-	48	
56		-	-	32.6	33.2	32.4	31.0	30.1	28.1	25.5	17.9	22.9	21.6	19.4	14.8	-	-	56	
64		-	-	-	26.9	26.2	24.9	24.9	23.7	22.8	16.2	21.1	19.8	18.7	14.8	-	-	64	
72		-	-	-	22.1	21.5	21.6	21.0	19.9	19.3	14.6	19.0	17.9	17.7	14.8	-	-	72	
80		-	-	-	-	18.3	18.9	17.6	18.1	16.7	13.3	16.2	16.3	16.2	14.2	-	-	80	
88		-	-	-	-	12.6	16.1	15.6	15.2	14.8	12.2	13.2	14.5	13.9	13.3	-	-	88	
96		-	-	-	-	-	13.7	14.0	12.9	12.6	11.1	10.8	12.2	11.9	11.5	-	-	96	
104		-	-	-	-	-	9.5	12.1	11.8	11.2	10.2	8.8	10.2	10.4	9.5	-	-	104	
112		-	-	-	-	-	-	9.9	10.1	9.6	9.2	7.2	8.5	8.5	7.8	-	-	112	
120		-	-	-	-	-	-	-	8.7	8.1	8.1	5.9	7.2	7.2	6.3	-	-	120	
128		-	-	-	-	-	-	-	7.5	7.1	6.9	4.6	5.9	5.9	5.1	-	-	128	
136		-	-	-	-	-	-	-	-	6.5	5.9	3.5	4.9	4.9	4.0	-	-	136	
144		-	-	-	-	-	-	-	-	4.9	4.9	2.7	4.0	4.0	3.1	-	-	144	
152		-	-	-	-	-	-	-	-	-	4.1	-	3.2	3.2	2.3	-	-	152	
160		-	-	-	-	-	-	-	-	-	-	-	-	-	2.5	-	-	160	

Operation

MS

(HA60)


 42,500 lbs		 26.6 ft x 23.6 ft		360°		ASME B30.5												
		39.4	53.5	67.3	81.4	95.5	109.6	(ft)		123.4	132.5	146.7	163.7	165.4	167.0	179.1	194.9	
ft		(ft)															ft	
		1,000 lbs																
10		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	-	10
12		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	-	12
14		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	14
16		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	16
18		58.0	58.0	58.0	58.0	58.0	56.4	-	-	-	-	-	-	-	-	-	-	18
20		58.0	58.0	58.0	58.0	58.0	56.0	-	-	-	-	-	-	-	-	-	-	20
24		58.0	58.0	58.0	58.0	58.0	53.5	48.7	-	-	-	-	-	-	-	-	-	24
28		58.0	58.0	58.0	58.0	58.0	51.4	46.7	-	-	-	-	-	-	-	-	-	28
32		58.0	58.0	58.0	58.0	58.0	49.7	44.8	37.4	-	-	-	-	-	-	-	-	32
36		-	53.2	53.3	52.9	52.2	48.1	43.0	36.5	30.7	21.5	24.3	22.7	-	-	-	-	36
40		-	47.0	47.3	46.6	47.1	45.8	40.9	35.6	29.7	21.3	24.2	22.7	19.4	14.8	-	-	40
48		-	-	35.9	36.9	36.1	34.5	33.8	31.5	28.3	19.8	23.9	22.4	19.4	14.8	-	-	48
56		-	-	29.0	28.8	28.1	27.1	26.6	25.9	24.9	17.9	22.9	21.6	19.4	14.8	-	-	56
64		-	-	-	23.2	22.4	22.9	22.0	21.8	20.8	16.2	20.3	19.8	18.7	14.8	-	-	64
72		-	-	-	19.0	19.7	19.0	18.6	18.2	18.1	14.6	16.4	17.7	17.0	14.8	-	-	72
80		-	-	-	-	16.8	15.9	16.3	15.4	15.1	13.3	13.2	14.6	14.0	13.3	-	-	80
88		-	-	-	-	9.9	14.1	13.7	13.5	13.1	12.2	10.5	12.0	12.0	10.9	-	-	88
96		-	-	-	-	-	12.3	11.7	11.4	10.8	10.7	8.4	9.8	9.8	8.9	-	-	96
104		-	-	-	-	-	8.0	10.3	9.7	9.1	9.0	6.6	7.9	7.9	7.3	-	-	104
112		-	-	-	-	-	-	8.8	8.1	8.1	7.4	5.0	6.5	6.5	5.7	-	-	112
120		-	-	-	-	-	-	-	6.8	7.0	6.1	3.9	5.3	5.3	4.4	-	-	120
128		-	-	-	-	-	-	-	5.7	5.8	5.1	2.8	4.2	4.2	3.3	-	-	128
136		-	-	-	-	-	-	-	-	4.9	4.1	1.8	3.1	3.3	2.4	-	-	136
144		-	-	-	-	-	-	-	-	3.3	3.3	-	2.2	2.5	-	-	-	144
152		-	-	-	-	-	-	-	-	-	2.6	-	-	-	-	-	-	152

Operation

MS

(HA60)

 9,500 lbs		 26.6 ft x 23.6 ft		360°		ASME B30.5													
		39.4	53.5	67.3	81.4	95.5	109.6	(ft)		123.4	132.5	146.7	163.7	165.4	167.0	179.1	194.9		
ft		(ft)																	ft
		1,000 lbs																	
10		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	-	10	
12		58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	-	12	
14		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	14	
16		58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	-	-	-	-	-	16	
18		58.0	58.0	58.0	58.0	58.0	56.4	-	-	-	-	-	-	-	-	-	-	18	
20		58.0	58.0	58.0	58.0	58.0	56.0	-	-	-	-	-	-	-	-	-	-	20	
24		57.9	58.0	58.0	57.2	56.9	52.6	48.1	-	-	-	-	-	-	-	-	-	24	
28		51.5	52.9	53.0	52.4	50.2	46.9	42.8	36.0	-	-	-	-	-	-	-	-	28	
32		39.8	42.2	43.7	44.0	41.7	39.8	37.3	34.1	27.8	-	-	-	-	-	-	-	32	
36		-	35.2	36.8	36.5	35.3	34.1	32.4	30.5	26.6	21.5	23.4	22.7	-	-	-	-	36	
40		-	29.1	30.2	29.9	30.6	30.2	28.8	27.5	24.9	21.3	22.0	22.3	19.2	14.8	-	-	40	
48		-	-	22.0	23.1	22.9	22.9	22.9	21.3	19.8	19.1	15.9	17.7	17.1	14.1	-	-	48	
56		-	-	17.2	17.6	17.9	17.6	17.4	16.5	16.3	14.8	11.6	13.3	12.8	11.0	-	-	56	
64		-	-	-	13.8	13.9	13.7	13.3	13.4	12.6	11.2	8.3	9.9	9.4	7.7	-	-	64	
72		-	-	-	10.9	10.9	10.9	10.2	10.4	9.8	8.4	5.6	7.1	6.7	5.1	-	-	72	
80		-	-	-	-	8.7	8.5	8.1	8.1	7.4	6.4	3.7	5.0	4.8	3.3	-	-	80	
88		-	-	-	-	7.0	6.7	6.3	6.3	5.6	4.7	-	3.5	3.3	-	-	-	88	
96		-	-	-	-	-	5.3	4.8	4.8	4.2	3.4	-	2.2	2.0	-	-	-	96	
104		-	-	-	-	-	3.9	3.5	3.7	3.0	2.3	-	-	-	-	-	-	104	
112		-	-	-	-	-	-	2.6	2.6	-	-	-	-	-	-	-	-	112	

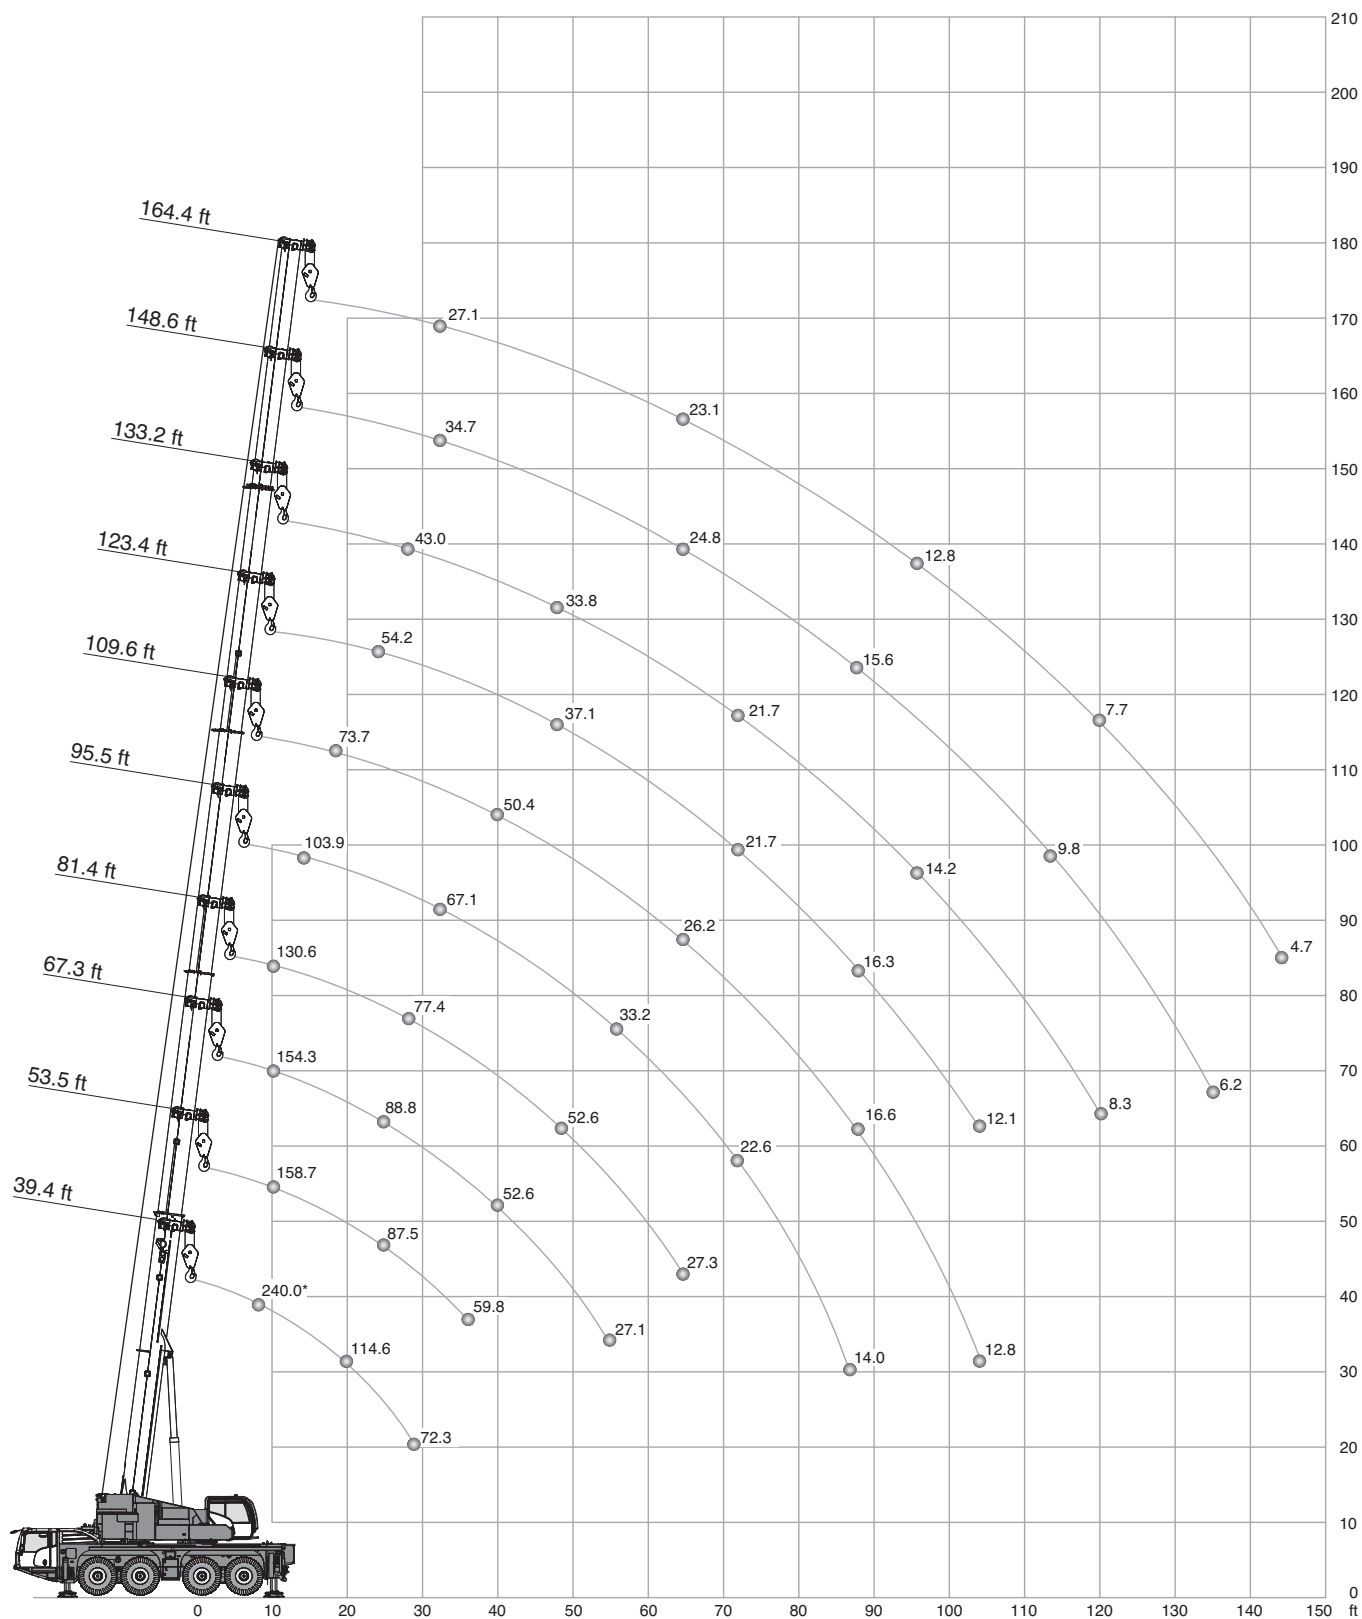

* Max. crane capacity – with additional special equipment

Operation

HA
(HA50)

 54,000 lbs		 26.6 ft x 23.6 ft					360°				ASME B30.5	
 (0°)	39.4	39.4	53.5	67.3	81.4	(ft)	109.6	123.4	133.2	148.6	164.4	
ft	1,000 lbs											ft
8	240.0*	-	-	-	-	-	-	-	-	-	-	8
10	175.2	162.1	158.7	154.3	130.6	-	-	-	-	-	-	10
12	160.3	145.9	145.0	140.9	127.1	-	-	-	-	-	-	12
14	147.4	131.7	132.6	129.7	118.3	103.9	-	-	-	-	-	14
16	136.2	119.4	120.5	119.8	113.8	99.1	-	-	-	-	-	16
18	125.5	109.6	110.7	110.4	108.4	93.8	73.7	-	-	-	-	18
20	114.6	100.4	101.6	102.9	102.5	88.7	70.3	-	-	-	-	20
24	93.0	86.2	87.5	88.8	88.4	82.0	66.6	54.2	-	-	-	24
28	72.3	68.2	77.3	77.8	77.4	76.1	62.1	51.8	43.0	-	-	28
32	-	-	68.1	68.6	68.0	67.1	57.6	49.4	41.2	34.7	27.1	32
36	-	-	59.8	60.4	59.8	58.8	54.2	46.3	39.7	33.9	27.1	36
40	-	-	-	52.6	52.2	51.1	50.4	43.2	38.0	33.1	27.1	40
48	-	-	-	41.2	40.5	40.0	40.5	37.1	33.8	30.8	26.8	48
56	-	-	-	27.1	32.0	33.2	31.9	31.8	29.6	27.8	25.2	56
64	-	-	-	-	27.3	27.1	26.2	26.3	25.7	24.8	23.1	64
72	-	-	-	-	19.4	22.6	22.8	21.7	21.7	21.4	20.8	72
80	-	-	-	-	-	19.5	19.4	18.9	18.3	18.3	17.8	80
88	-	-	-	-	-	14.0	16.6	16.3	16.0	15.6	15.1	88
96	-	-	-	-	-	-	14.5	14.1	14.2	13.4	12.8	96
104	-	-	-	-	-	-	12.8	12.1	12.4	11.5	10.8	104
112	-	-	-	-	-	-	-	-	10.7	9.8	9.2	112
120	-	-	-	-	-	-	-	-	8.3	8.3	7.7	120
128	-	-	-	-	-	-	-	-	-	7.3	6.6	128
136	-	-	-	-	-	-	-	-	-	6.2	5.5	136
144	-	-	-	-	-	-	-	-	-	-	4.7	144

* Max. crane capacity – with additional special equipment

Operation

HA
(HA50)

 42,500 lbs		 26.6 ft x 23.6 ft		360° / Max.*		ASME B30.5				
 360° 39.4 ft	Max. 39.4 ft	360° 53.5 ft	Max. 53.5 ft	360° 67.3 ft	Max. 67.3 ft	360° 81.4 ft	Max. 81.4 ft	360° 95.5 ft	Max. 95.5 ft	
ft	1,000 lbs									ft
10	161.6	162.1	158.7	158.7	154.3	154.3	130.6	130.6	-	10
12	144.8	145.9	144.7	145.0	140.9	140.9	127.1	127.1	-	12
14	130.3	131.7	131.4	132.6	129.7	129.7	118.3	118.3	103.9	14
16	118.1	119.4	119.2	120.5	119.0	119.8	113.8	113.8	99.1	16
18	108.2	109.6	109.5	110.7	109.3	110.4	107.8	108.4	93.8	18
20	99.2	100.4	100.5	101.6	101.8	102.9	101.4	102.5	88.7	20
24	85.3	86.1	86.5	87.5	87.8	88.8	87.3	88.4	82.0	24
28	67.7	68.0	75.4	76.0	76.0	76.5	75.5	76.0	74.6	28
32	-	-	64.3	64.9	64.9	65.3	64.5	64.8	63.4	32
36	-	-	55.2	56.5	55.9	56.9	55.3	56.4	54.1	36
40	-	-	-	-	47.5	49.2	46.8	48.6	46.2	40
48	-	-	-	-	35.9	37.4	35.8	36.9	36.6	48
56	-	-	-	-	24.1	25.8	29.4	30.5	28.9	56
64	-	-	-	-	-	-	23.9	25.1	23.9	64
72	-	-	-	-	-	-	19.4	19.4	19.9	72
80	-	-	-	-	-	-	-	-	17.0	80
88	-	-	-	-	-	-	-	-	14.0	88

 360° 109.6 ft	Max. 109.6 ft	360° 123.4 ft	Max. 123.4 ft	360° 133.2 ft	Max. 133.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 164.4 ft	Max. 164.4 ft	
ft	1,000 lbs									ft
18	73.7	73.7	-	-	-	-	-	-	-	18
20	70.3	70.3	-	-	-	-	-	-	-	20
24	66.6	66.6	54.2	54.2	-	-	-	-	-	24
28	62.1	62.1	51.8	51.8	43.0	43.0	-	-	-	28
32	57.6	57.6	49.4	49.4	41.2	41.2	34.7	34.7	27.1	32
36	52.6	53.5	46.3	46.3	39.7	39.7	33.9	33.9	27.1	36
40	46.8	48.6	42.9	43.1	38.0	38.0	33.1	33.1	27.1	40
48	35.3	36.9	35.7	36.3	33.0	33.6	30.8	30.8	26.8	48
56	28.8	29.5	28.0	29.5	27.7	28.5	26.7	27.6	25.2	56
64	23.5	24.8	23.1	24.0	22.4	23.7	22.6	23.6	21.8	64
72	19.5	20.6	19.3	20.4	19.5	19.9	18.6	19.7	17.9	72
80	16.8	17.7	16.1	17.2	16.3	17.4	15.5	16.6	14.8	80
88	14.3	15.4	13.6	14.7	13.8	14.9	12.9	14.3	12.4	88
96	12.3	13.4	11.6	12.7	11.8	12.9	10.9	12.1	10.3	96
104	10.6	11.7	9.9	11.0	10.1	11.2	9.1	10.3	8.6	104
112	-	-	-	-	8.7	9.8	7.6	9.0	7.0	112
120	-	-	-	-	6.4	7.5	6.4	7.7	5.9	120
128	-	-	-	-	-	-	5.4	6.6	4.7	128
136	-	-	-	-	-	-	4.6	5.7	3.8	136
144	-	-	-	-	-	-	-	-	2.9	144

* Max. values are valid only for specific superstructure positions

Operation

HA
(HA50)

 13,400 lbs		 26.6 ft x 23.6 ft		360° / Max.*		ASME B30.5				
 360° 39.4 ft	Max. 39.4 ft	360° 53.5 ft	Max. 53.5 ft	360° 67.3 ft	Max. 67.3 ft	360° 81.4 ft	Max. 81.4 ft	360° 95.5 ft	Max. 95.5 ft	
ft	1,000 lbs									ft
10	158.0	162.1	158.5	158.7	154.3	154.3	130.6	130.6	-	10
12	140.7	145.9	141.8	145.0	140.5	140.9	127.1	127.1	-	12
14	126.6	131.7	127.6	132.6	127.5	129.7	118.3	118.3	103.9	14
16	114.7	119.4	115.9	120.5	115.8	119.8	113.8	113.8	99.1	16
18	103.4	107.1	105.1	108.4	105.0	108.2	101.6	106.3	89.7	18
20	92.2	95.0	95.0	96.6	95.8	98.3	88.1	97.9	79.5	20
24	71.0	76.8	74.8	79.4	73.9	79.8	68.9	79.4	65.1	24
28	52.8	63.1	56.6	66.3	57.5	66.7	55.6	66.3	54.6	28
32	-	-	44.4	56.5	45.6	56.9	46.7	56.5	45.7	32
36	-	-	36.9	49.4	38.7	49.9	39.1	49.4	38.4	36
40	-	-	-	-	32.1	43.6	32.3	43.1	32.6	40
48	-	-	-	-	23.8	34.4	24.4	34.9	24.3	48
56	-	-	-	-	18.6	22.8	18.8	27.9	19.0	56
64	-	-	-	-	-	-	14.8	22.9	15.0	64
72	-	-	-	-	-	-	12.0	19.4	12.0	72
80	-	-	-	-	-	-	-	-	9.6	80
88	-	-	-	-	-	-	-	-	7.9	88

 360° 109.6 ft	Max. 109.6 ft	360° 123.4 ft	Max. 123.4 ft	360° 133.2 ft	Max. 133.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 164.4 ft	Max. 164.4 ft	
ft	1,000 lbs									ft
18	73.7	73.7	-	-	-	-	-	-	-	18
20	69.7	70.3	-	-	-	-	-	-	-	20
24	60.8	66.6	53.2	54.2	-	-	-	-	-	24
28	50.7	62.1	47.0	51.8	42.4	43.0	-	-	-	28
32	44.2	55.8	41.6	49.4	38.5	41.2	34.7	34.7	27.1	32
36	37.8	49.4	36.3	45.0	34.8	39.7	31.0	33.9	26.9	36
40	32.2	43.1	31.1	41.6	30.7	37.9	28.3	33.1	26.1	40
48	24.0	33.8	23.3	33.5	23.7	32.1	21.6	30.3	19.9	48
56	18.5	27.6	17.8	26.9	18.1	26.3	16.9	25.9	15.3	56
64	14.4	22.5	13.8	22.2	14.2	22.3	13.1	21.5	11.7	64
72	11.5	19.2	10.9	18.6	11.1	18.8	10.0	17.9	8.9	72
80	9.2	16.2	8.5	15.5	8.7	15.7	7.6	14.9	6.8	80
88	7.4	13.8	6.7	13.4	7.0	13.5	5.8	12.6	5.2	88
96	5.9	12.0	5.3	11.3	5.3	11.5	4.4	10.6	3.7	96
104	4.8	10.3	4.1	9.9	4.1	9.9	3.2	9.2	2.6	104
112	-	-	-	-	3.0	8.7	2.1	7.9	-	112
120	-	-	-	-	-	6.4	-	6.5	-	120
128	-	-	-	-	-	-	-	5.3	-	128
136	-	-	-	-	-	-	-	4.4	-	136
144	-	-	-	-	-	-	-	-	2.9	144

* Max. values are valid only for specific superstructure positions

Operation


HA
(HA50)

 9,500 lbs		 26.6 ft x 23.6 ft		360° / Max.*		ASME B30.5				
 360° 39.4 ft	Max. 39.4 ft	360° 53.5 ft	Max. 53.5 ft	360° 67.3 ft	Max. 67.3 ft	360° 81.4 ft	Max. 81.4 ft	360° 95.5 ft	Max. 95.5 ft	
ft	1,000 lbs									ft
10	157.3	162.1	158.4	158.7	154.3	154.3	130.6	130.6	-	10
12	140.1	145.9	141.2	145.0	140.4	140.9	127.1	127.1	-	12
14	126.1	131.7	127.2	132.6	127.1	129.7	118.3	118.3	103.9	14
16	114.3	119.4	115.5	120.5	115.3	119.8	110.3	113.8	97.8	16
18	101.9	106.1	103.6	107.4	102.1	107.2	96.6	105.4	86.3	18
20	89.3	93.1	92.8	95.1	90.0	96.4	82.7	95.9	74.7	20
24	66.0	75.2	70.4	77.7	69.3	78.3	64.6	77.7	62.4	24
28	48.9	62.4	52.6	64.8	53.6	65.3	53.4	64.8	51.1	28
32	-	-	41.2	55.3	43.5	55.8	43.7	55.3	43.0	32
36	-	-	34.1	48.4	36.1	48.9	36.3	48.4	36.5	36
40	-	-	-	-	29.7	42.5	30.4	42.0	30.2	40
48	-	-	-	-	22.2	33.3	22.4	33.5	22.7	48
56	-	-	-	-	16.9	21.6	17.1	26.5	17.3	56
64	-	-	-	-	-	-	13.4	21.8	13.5	64
72	-	-	-	-	-	-	10.6	18.6	10.6	72
80	-	-	-	-	-	-	-	-	8.5	80
88	-	-	-	-	-	-	-	-	6.8	88

 360° 109.6 ft	Max. 109.6 ft	360° 123.4 ft	Max. 123.4 ft	360° 133.2 ft	Max. 133.2 ft	360° 148.6 ft	Max. 148.6 ft	360° 164.4 ft	Max. 164.4 ft	
ft	1,000 lbs									ft
18	73.4	73.7	-	-	-	-	-	-	-	18
20	68.7	70.3	-	-	-	-	-	-	-	20
24	57.0	66.6	51.4	54.2	41.3	-	-	-	-	24
28	48.9	61.4	45.3	51.8	40.5	43.0	33.6	-	-	28
32	41.1	55.0	38.9	49.4	37.5	41.2	33.2	34.7	27.1	32
36	35.2	47.7	33.4	44.2	32.8	39.7	29.7	33.9	25.6	36
40	30.0	40.9	28.5	40.8	28.1	37.7	25.7	33.1	23.5	40
48	22.2	33.1	21.4	31.6	21.5	31.1	19.4	29.9	17.8	48
56	16.7	26.3	16.1	26.0	16.3	25.6	14.8	24.9	13.4	56
64	13.0	21.4	12.3	21.2	12.6	21.4	11.2	20.4	9.9	64
72	10.0	18.2	9.5	17.7	9.8	17.9	8.7	17.0	7.3	72
80	7.9	15.3	7.2	14.8	7.5	14.9	6.5	14.0	5.5	80
88	6.3	13.3	5.6	12.6	5.8	12.8	4.7	11.8	4.0	88
96	4.8	11.4	4.2	10.7	4.4	10.9	3.4	9.8	2.8	96
104	3.9	9.7	3.2	9.0	3.2	9.1	2.3	8.1	-	104
112	-	-	-	-	2.4	7.6	-	6.6	-	112
120	-	-	-	-	-	5.3	-	5.5	-	120
128	-	-	-	-	-	-	-	4.4	-	128
136	-	-	-	-	-	-	-	3.5	-	136
144	-	-	-	-	-	-	-	-	2.0	144

* Max. values are valid only for specific superstructure positions

Notes

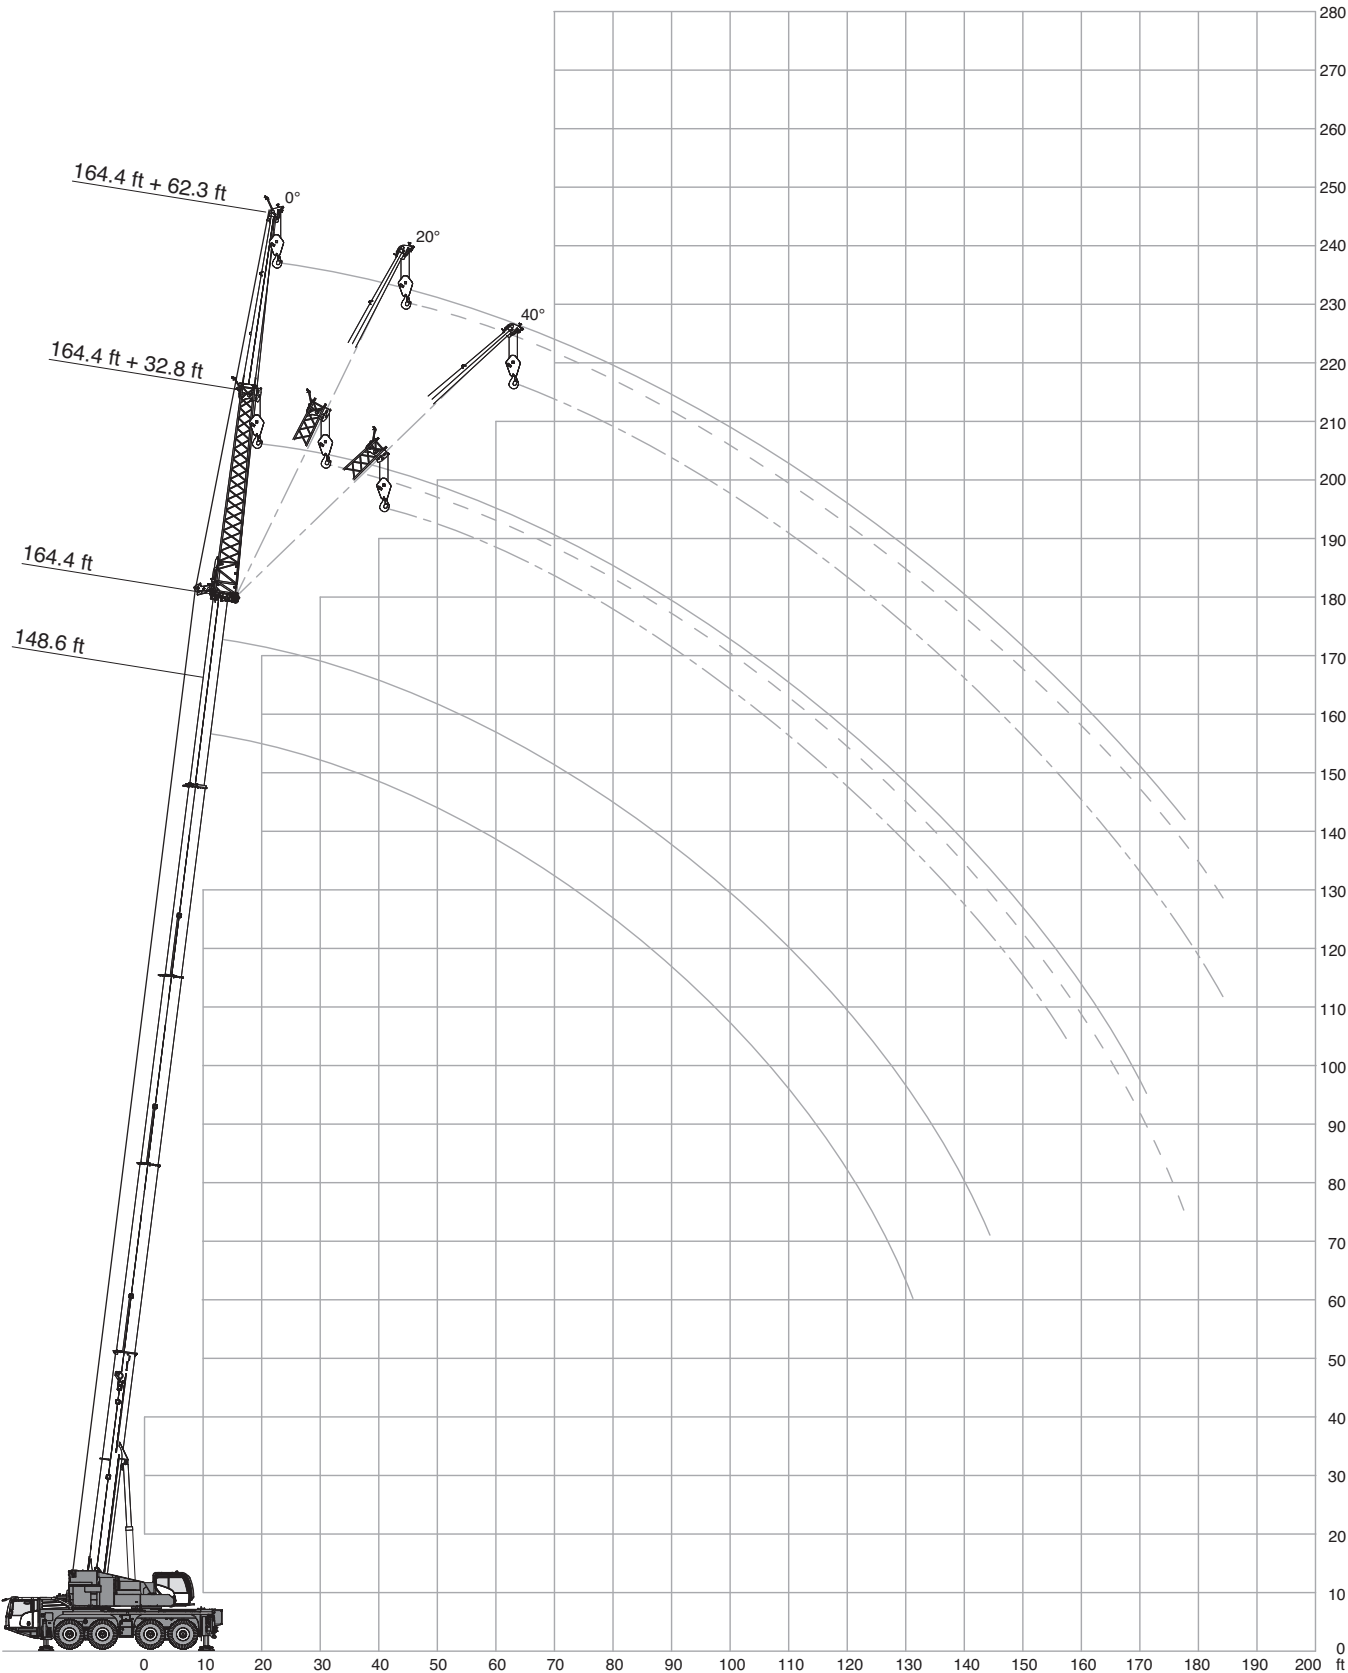

Operation

HAV
(HA50)

 54,000 lbs		 26.6 ft x 23.6 ft		360°				ASME B30.5							
 164.4 ft		 148.6 ft													
		32.8 ft			62.3 ft					32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°			0°	20°	40°	0°	20°	40°
ft		1,000 lbs						ft		1,000 lbs					
40		14.6	-	-	8.4	-	-	36		17.9	-	-	-	-	-
48		14.6	-	-	8.4	-	-	40		17.9	-	-	10.1	-	-
56		14.6	14.6	-	8.4	-	-	48		17.9	-	-	10.1	-	-
64		14.6	14.6	13.4	8.4	-	-	56		17.9	17.9	-	10.1	-	-
72		14.6	13.9	12.6	8.4	-	-	64		17.9	17.9	16.2	10.1	-	-
80		14.5	13.1	12.0	8.4	8.4	-	72		17.9	17.6	15.9	10.1	9.9	-
88		13.9	12.2	11.3	8.4	8.4	7.5	80		16.7	16.8	15.6	10.1	9.7	8.1
96		12.1	11.5	10.7	8.4	8.1	7.1	88		14.7	15.3	15.1	10.1	9.4	7.8
104		10.2	10.9	10.2	8.4	7.6	6.9	96		12.3	13.3	13.7	10.0	9.1	7.6
112		8.5	9.4	9.8	7.9	7.0	6.4	104		11.0	11.3	11.7	9.7	8.9	7.5
120		7.2	7.8	8.3	7.4	6.7	6.1	112		9.4	9.8	9.8	9.0	8.6	7.3
128		5.9	6.6	6.9	6.2	6.3	5.8	120		7.9	8.5	8.9	7.6	8.3	7.3
136		4.9	5.4	5.8	5.1	6.0	5.6	128		6.8	7.3	7.6	6.8	7.6	7.2
144		4.0	4.4	4.7	4.2	5.1	5.3	136		5.8	6.2	6.4	6.0	6.4	6.9
152		3.2	3.6	3.6	3.4	4.3	4.9	144		4.7	5.1	5.3	4.9	5.5	6.0
160		2.5	2.8	-	2.6	3.5	3.9	152		3.9	4.3	-	4.1	5.0	5.0
168		-	-	-	-	2.8	3.1	160		3.3	3.5	-	3.4	4.2	4.5
176		-	-	-	-	2.1	2.3	168		-	-	-	2.8	3.3	3.1
								176		-	-	-	2.3	2.5	2.3
								184		-	-	-	-	2.0	-

 95.5 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lbs					
16		29.1	-	-	-	-	-
18		29.1	-	-	-	-	-
20		29.1	-	-	17.4	-	-
24		29.1	-	-	17.1	-	-
28		29.1	-	-	16.9	-	-
32		29.1	27.6	-	16.6	-	-
36		29.1	26.4	-	16.3	-	-
40		29.1	25.2	19.3	16.0	-	-
48		29.1	23.4	18.5	15.3	13.0	-
56		28.3	21.9	17.8	14.8	12.2	-
64		25.7	20.6	17.3	14.1	11.4	9.1
72		21.5	19.4	17.0	13.5	10.8	8.8
80		18.5	18.4	16.7	12.7	10.3	8.3
88		16.3	16.3	16.0	12.1	9.7	8.2
96		14.5	14.5	14.6	11.3	9.3	8.0
104		12.8	13.1	8.6	10.5	9.1	7.7
112		11.1	7.9	-	9.9	8.6	7.7
120		7.4	-	-	9.4	8.4	7.7
128		-	-	-	8.6	8.4	5.1
136		-	-	-	7.9	8.0	-
144		-	-	-	7.1	6.0	-

 39.4 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
		ft					
10	29.1	-	-	21.6	-	-	
12	29.1	-	-	21.5	-	-	
14	29.1	-	-	21.4	-	-	
16	29.1	29.1	-	21.1	-	-	
18	29.1	29.1	-	20.7	-	-	
20	29.1	28.9	-	20.4	-	-	
24	29.1	26.8	-	19.6	-	-	
28	29.1	24.7	20.3	18.8	-	-	
32	29.1	23.0	19.3	17.9	14.5	-	
36	27.2	21.6	18.5	16.9	13.7	-	
40	24.8	20.3	17.8	15.9	12.9	-	
48	21.2	18.4	16.9	13.8	11.6	-	
56	18.5	17.2	-	12.2	10.6	9.3	
64	-	-	-	11.0	9.6	8.7	
72	-	-	-	9.9	9.1	8.2	
80	-	-	-	9.2	8.6	-	
88	-	-	-	8.6	-	-	

Operation

HAV
(HA50)

 42,500 lbs		 26.6 ft x 23.6 ft		360°				ASME B30.5									
 164.4 ft										 148.6 ft							
		32.8 ft			62.3 ft							32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°					0°	20°	40°			
ft		1,000 lbs															
40		14.6	-	-	8.4	-	-			36		17.9	-	-	-	-	-
48		14.6	-	-	8.4	-	-			40		17.9	-	-	10.1	-	-
56		14.6	14.6	-	8.4	-	-			48		17.9	-	-	10.1	-	-
64		14.6	14.6	13.4	8.4	-	-			56		17.9	17.9	-	10.1	-	-
72		14.6	13.9	12.6	8.4	-	-			64		17.9	17.9	16.2	10.1	-	-
80		14.2	13.1	12.0	8.4	8.4	-			72		17.6	17.6	15.9	10.1	9.9	-
88		11.8	12.2	11.3	8.4	8.4	7.5			80		14.6	15.7	15.5	10.1	9.7	8.1
96		9.7	10.8	10.7	8.4	8.1	7.1			88		12.7	13.1	14.0	10.1	9.4	7.8
104		7.9	8.8	9.5	7.8	7.6	6.9			96		10.6	11.0	11.5	9.7	9.1	7.6
112		6.5	7.2	7.8	6.5	7.0	6.4			104		8.8	9.5	10.0	8.4	8.9	7.5
120		5.3	5.9	6.4	5.3	6.6	6.1			112		7.2	7.9	8.5	7.4	8.3	7.3
128		4.2	4.8	5.2	4.3	5.5	5.8			120		6.1	6.6	7.0	6.3	7.0	7.3
136		3.3	3.8	4.0	3.3	4.4	5.3			128		5.0	5.5	5.7	5.2	5.9	6.7
144		2.5	2.9	3.1	2.5	3.6	4.2			136		4.0	4.4	4.7	4.2	5.1	5.6
152		-	-	2.3	-	2.8	3.4			144		3.1	3.6	3.8	3.3	4.2	4.9
160		-	-	-	-	2.0	2.6			152		2.4	2.8	-	2.6	3.4	3.9
										160		-	2.0	-	2.0	2.6	3.1

 95.5 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lbs					
16		29.1	-	-	-	-	-
18		29.1	-	-	-	-	-
20		29.1	-	-	17.4	-	-
24		29.1	-	-	17.1	-	-
28		29.1	-	-	16.9	-	-
32		29.1	27.6	-	16.6	-	-
36		29.1	26.4	-	16.3	-	-
40		29.1	25.2	19.3	16.0	-	-
48		29.1	23.4	18.5	15.3	13.0	-
56		27.2	21.9	17.8	14.8	12.2	-
64		22.9	20.6	17.3	14.1	11.4	9.1
72		19.5	19.2	17.0	13.5	10.8	8.8
80		16.8	17.0	16.4	12.7	10.3	8.3
88		14.4	14.7	15.1	12.1	9.7	8.2
96		12.3	12.8	13.0	11.3	9.3	8.0
104		10.9	11.0	8.6	10.4	9.1	7.7
112		9.6	7.9	-	9.6	8.6	7.7
120		7.4	-	-	8.3	8.4	7.7
128		-	-	-	7.5	7.8	5.1
136		-	-	-	6.8	7.0	-
144		-	-	-	6.0	4.6	-

 39.4 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lbs					
10		29.1	-	-	21.6	-	-
12		29.1	-	-	21.5	-	-
14		29.1	-	-	21.4	-	-
16		29.1	29.1	-	21.1	-	-
18		29.1	29.1	-	20.7	-	-
20		29.1	28.9	-	20.4	-	-
24		29.1	26.8	-	19.6	-	-
28		29.1	24.7	20.3	18.8	-	-
32		29.1	23.0	19.3	17.9	14.5	-
36		27.2	21.6	18.5	16.9	13.7	-
40		24.8	20.3	17.8	15.9	12.9	-
48		21.2	18.4	16.9	13.8	11.6	-
56		18.5	17.2	-	12.2	10.6	9.3
64		-	-	-	11.0	9.6	8.7
72		-	-	-	9.9	9.1	8.2
80		-	-	-	9.2	8.6	-
88		-	-	-	8.6	-	-

Operation

HAV

(HA50)

13,400 lbs		 26.6 ft x 23.6 ft		360°				ASME B30.5											
 164.4 ft										 148.6 ft									
		32.8 ft			62.3 ft									32.8 ft			62.3 ft		
		0°	20°	40°		0°	20°	40°			0°	20°	40°		0°	20°	40°		
ft		1,000 lbs																	
40		14.6	-	-		8.4	-	-			17.9	-	-		-	-	-		
48		14.6	-	-		8.4	-	-			17.9	-	-		10.1	-	-		
56		13.4	14.4	-		8.4	-	-			17.5	17.3	-		10.1	-	-		
64		10.4	12.2	13.3		8.4	-	-			15.5	16.2	-		10.1	-	-		
72		7.6	9.1	10.6		7.1	-	-			12.0	13.4	14.4		9.9	-	-		
80		5.5	7.0	8.1		5.0	7.6	-			9.1	10.4	11.7		8.6	9.9	-		
88		4.0	5.2	6.2		3.5	5.8	7.4			7.0	8.3	9.4		6.6	8.7	8.1		
96		2.6	3.7	4.6		2.3	4.2	6.0			5.3	6.4	7.3		5.0	7.0	7.8		
104		-	2.6	3.3		-	3.0	4.6			3.9	4.8	5.7		3.6	5.5	6.9		
112		-	-	-		-	-	3.5			2.8	3.7	4.4		2.6	4.1	5.5		
120		-	-	-		-	-	2.4			-	2.6	3.0		-	3.0	4.3		
											120	-	-	-	-	2.2	3.3		
											128	-	-	-	-	-	2.3		

 95.5 ft																 39.4 ft							
		32.8 ft			62.3 ft									32.8 ft			62.3 ft						
		0°	20°	40°		0°	20°	40°			0°	20°	40°		0°	20°	40°						
ft		1,000 lbs																					
16		29.1	-	-		-	-	-			10	29.1	-	-		21.6	-	-					
18		29.1	-	-		-	-	-			12	29.1	-	-		21.5	-	-					
20		29.1	-	-		17.4	-	-			14	29.1	-	-		21.4	-	-					
24		29.1	-	-		17.1	-	-			16	29.1	29.1	-		21.1	-	-					
28		29.1	-	-		16.9	-	-			18	29.1	29.1	-		20.7	-	-					
32		29.1	27.6	-		16.6	-	-			20	29.1	28.9	-		20.4	-	-					
36		29.1	26.4	-		16.3	-	-			24	29.1	26.8	-		19.6	-	-					
40		28.8	25.2	19.3		16.0	-	-			28	29.1	24.7	20.3		18.8	-	-					
48		24.4	23.0	18.5		15.3	13.0	-			32	29.1	23.0	19.3		17.9	14.5	-					
56		19.4	19.8	17.8		14.8	12.2	-			36	27.2	21.6	18.5		16.9	13.7	-					
64		15.3	16.4	16.6		14.0	11.4	9.1			40	24.8	20.3	17.8		15.9	12.9	-					
72		12.2	13.1	13.7		12.6	10.8	8.8			48	21.2	18.4	16.9		13.8	11.6	-					
80		10.0	10.7	11.1		10.5	10.2	8.3			56	18.5	17.2	-		12.2	10.6	9.3					
88		8.1	8.7	9.2		8.6	9.4	8.2			64	-	-	-		11.0	9.6	8.7					
96		6.6	7.1	7.4		7.0	8.2	7.9			72	-	-	-		9.9	9.1	8.2					
104		5.2	5.7	5.9		5.7	6.8	7.3			80	-	-	-		9.2	8.6	-					
112		4.1	4.6	-		4.6	5.5	6.1			88	-	-	-		8.6	-	-					
120		3.3	-	-		3.8	4.4	5.0															
128		-	-	-		3.0	3.5	4.0															
136		-	-	-		2.3	2.6	-															
144		-	-	-		1.8	2.0	-															

Operation


HAV
(HA50)

 9,500 lbs		 26.6 ft x 23.6 ft		360°		ASME B30.5									
 164.4 ft		 148.6 ft													
		32.8 ft			62.3 ft					32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°			0°	20°	40°			
ft		1,000 lbs													
40		14.6	-	-	8.4	-	-	36		17,9	-	-	-	-	-
48		14.2	-	-	8.4	-	-	40		17,9	-	-	10,1	-	-
56		11.8	13.5	-	8.4	-	-	48		16,9	17,3	-	10,1	-	-
64		8.5	10.4	12.1	7.5	-	-	56		13,6	15,2	14,3	10,1	-	-
72		6.2	7.8	9.1	5.6	-	-	64		10,3	12,0	13,1	9,3	-	-
80		4.4	5.7	6.8	3.8	6.3	-	72		7,6	9,1	10,4	7,1	9,7	-
88		2.9	4.0	5.0	2.4	4.6	6.6	80		5,7	7,0	8,0	5,3	7,6	8,1
96		-	2.6	3.5	-	3.3	5.0	88		4,2	5,2	6,1	3,7	5,8	7,4
104		-	-	2.3	-	2.1	3.7	96		2,8	3,9	4,6	2,5	4,4	6,0
112		-	-	-	-	-	2.4	104		1,9	2,6	3,3	-	3,2	4,6
								112		-	-	-	-	-	3,5
								120		-	-	-	-	-	2,5

 95.5 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lbs					
16		29.1	-	-	-	-	-
18		29.1	-	-	-	-	-
20		29.1	-	-	17.4	-	-
24		29.1	-	-	17.1	-	-
28		29.1	-	-	16.9	-	-
32		29.1	27.6	-	16.6	-	-
36		29.1	26.4	-	16.3	-	-
40		28.6	25.2	19.3	16.0	-	-
48		23.1	22.4	18.5	15.3	13.0	-
56		17.7	18.9	17.7	14.6	12.2	-
64		13.9	14.9	15.6	13.4	11.4	9.1
72		11.1	12.0	12.4	11.5	10.8	8.8
80		8.7	9.6	10.1	9.4	10.0	8.3
88		7.0	7.6	8.2	7.6	8.8	8.1
96		5.5	6.1	6.4	6.1	7.2	7.8
104		4.3	4.8	5.0	4.8	5.9	6.6
112		3.5	3.7	-	3.9	4.8	5.4
120		2.5	-	-	3.0	3.7	4.2
128		-	-	-	2.3	2.8	3.2
136		-	-	-	-	2.1	-

 39.4 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lbs					
10		29.1	-	-	21.6	-	-
12		29.1	-	-	21.5	-	-
14		29.1	-	-	21.4	-	-
16		29.1	29.1	-	21.1	-	-
18		29.1	29.1	-	20.7	-	-
20		29.1	28.9	-	20.4	-	-
24		29.1	26.8	-	19.6	-	-
28		29.1	24.7	20.3	18.8	-	-
32		29.1	23.0	19.3	17.9	14.5	-
36		27.2	21.6	18.5	16.9	13.7	-
40		24.8	20.3	17.8	15.9	12.9	-
48		21.2	18.4	16.9	13.8	11.6	-
56		17.5	16.9	-	12.2	10.6	9.3
64		-	-	-	11.0	9.6	8.7
72		-	-	-	9.9	9.1	8.2
80		-	-	-	9.2	8.6	-
88		-	-	-	8.5	-	-

Notes

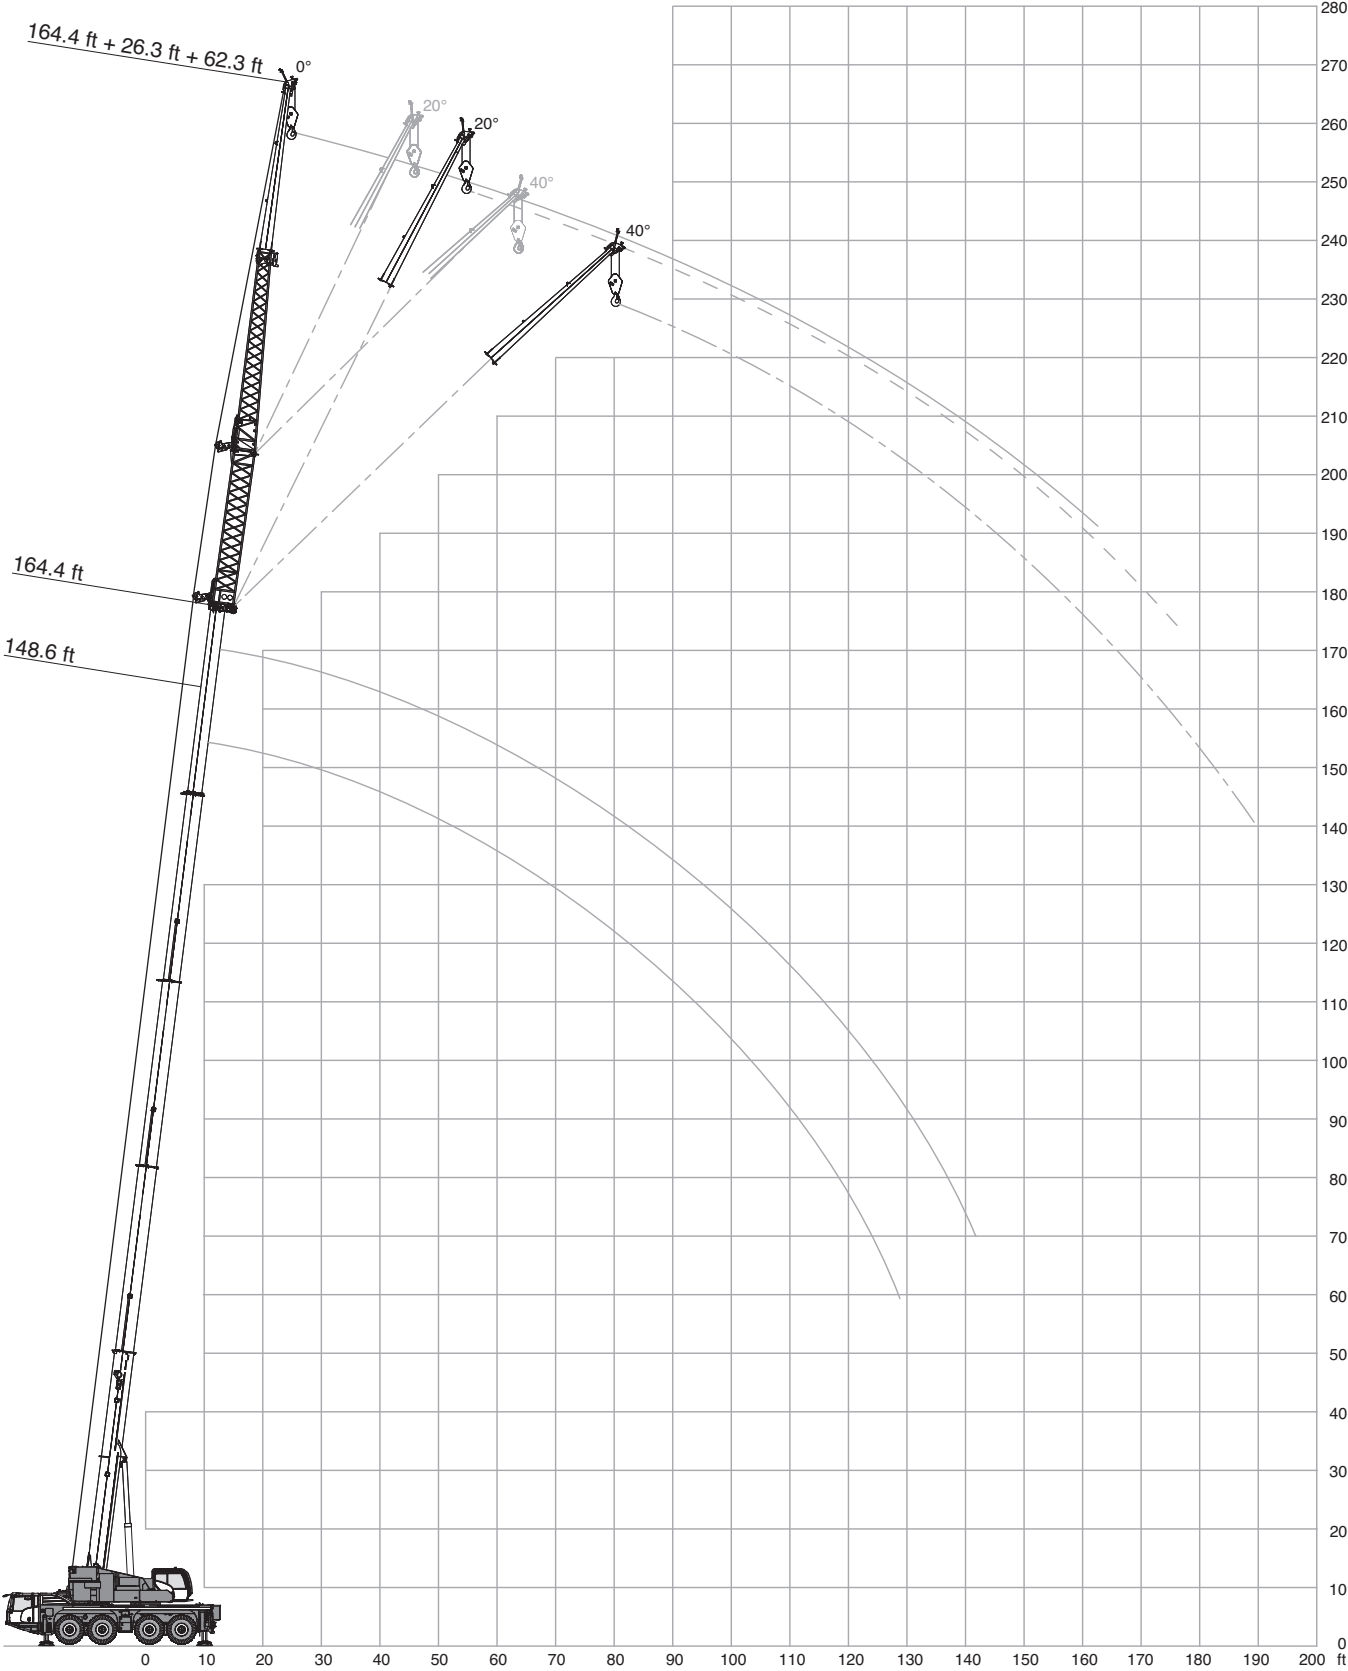

Operation

HAV-VA

(HA50)

54,000 lbs		26.6 ft x 23.6 ft		360°		ASME B30.5		
164.4 ft				148.6 ft				
		26.3 ft						
		0°	0°	0°	20°	40°		
		62.3 ft						
		0°	20°	40°	0°	0°*		
ft		1,000 lbs					ft	
48		9.3	-	-	-	-	40	
56		9.3	-	-	-	-	48	
64		9.3	9.3	-	-	-	56	
72		9.3	9.3	-	-	-	64	
80		9.3	9.3	9.1	8.7	-	72	
88		9.3	9.0	8.4	8.1	7.1	80	
96		9.0	8.2	7.9	7.4	6.7	88	
104		8.3	7.6	7.3	6.9	6.2	96	
112		7.6	7.0	6.8	6.6	5.9	104	
120		6.3	6.5	6.3	6.1	5.7	112	
128		5.1	5.7	5.9	5.7	5.4	120	
136		4.0	4.7	5.1	5.0	5.1	128	
144		2.9	3.6	4.0	4.0	4.9	136	
152		2.1	2.8	3.0	3.0	3.8	144	
160		-	-	2.2	2.2	2.8	152	
							160	

 95.5 ft						
 	26.3 ft					
	0°	0°	0°	20°	40°	
	62.3 ft					
	0°	20°	40°	0°	0°	
ft	1,000 lbs					
24	25.4	-	-	-	-	
28	24.6	-	-	-	-	
32	23.6	-	-	-	-	
36	22.5	19.1	-	-	-	
40	21.4	18.2	-	-	-	
48	19.4	16.6	14.7	14.3	-	
56	17.7	15.3	13.8	13.2	-	
64	16.0	14.1	12.9	12.3	10.0	
72	14.6	13.0	12.1	11.5	9.7	
80	13.5	12.2	11.4	10.9	9.2	
88	12.5	11.4	10.8	10.3	8.9	
96	11.7	10.7	10.3	9.9	8.7	
104	10.9	10.2	10.0	9.3	8.4	
112	9.9	9.7	9.7	8.8	8.4	
120	8.8	9.0	5.0	8.5	8.2	
128	7.9	7.9	-	7.9	4.5	
136	6.9	7.1	-	7.2	-	
144	5.8	4.0	-	4.0	-	

 *161.1 ft

 39.4 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
ft		1,000 lbs				
10	29.1	-	-	-	-	
12	29.1	-	-	-	-	
14	29.1	-	-	-	-	
16	29.1	-	-	-	-	
18	29.1	-	-	-	-	
20	28.9	24.3	-	-	-	
24	26.0	22.2	-	-	-	
28	23.4	20.2	-	-	-	
32	21.2	18.6	16.8	16.4	-	
36	19.3	17.3	15.8	15.3	-	
40	17.7	16.1	14.9	14.4	-	
48	15.3	14.1	13.3	12.8	11.0	
56	13.4	12.4	11.9	11.4	10.0	
64	12.0	11.2	11.0	10.5	9.4	
72	10.6	10.2	10.2	9.5	8.8	
80	9.6	9.4	-	9.0	-	

Operation

HAV-VA

(HA50)

 42,500 lbs		 26.6 ft x 23.6 ft		360°		ASME B30.5								
 164.4 ft						 148.6 ft								
		26.3 ft							26.3 ft					
		0°	0°	0°	20°	40°			0°	0°	0°	0°	20°	40°
		62.3 ft							62.3 ft					
		0°	20°	40°	0°	0°*			0°	20°	40°	0°	0°	
ft		1,000 lbs					ft		1,000 lbs					
48		9.3	-	-	-	-	40		11.7	-	-	-	-	
56		9.3	-	-	-	-	48		11.7	-	-	-	-	
64		9.3	9.3	-	-	-	56		11.7	-	-	-	-	
72		9.3	9.3	-	-	-	64		11.7	11.7	-	-	-	
80		9.3	9.3	9.1	8.7	-	72		11.7	11.7	11.3	10.8	-	
88		9.3	9.0	8.4	8.1	7.1	80		11.6	11.4	10.9	10.3	8.8	
96		8.3	8.2	7.9	7.4	6.7	88		10.7	10.9	10.5	10.0	8.5	
104		6.6	7.6	7.3	6.9	6.2	96		8.9	10.0	10.2	9.6	8.2	
112		5.2	6.1	6.8	6.6	5.9	104		7.8	8.2	9.0	8.7	8.2	
120		4.2	5.0	5.6	5.6	5.7	112		6.3	6.8	7.4	7.2	7.9	
128		3.1	4.0	4.4	4.4	5.2	120		5.2	5.9	6.0	5.9	6.9	
136		2.2	2.9	3.3	3.3	4.2	128		4.0	4.6	5.2	5.1	5.4	
144		-	2.0	2.5	2.5	3.1	136		3.0	3.7	4.0	4.0	4.6	
152		-	-	-	-	2.3	144		2.2	2.7	3.1	3.1	3.6	
							152		-	-	2.1	2.1	2.7	

 95.5 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
ft	1,000 lbs					
24	25.4	-	-	-	-	
28	24.6	-	-	-	-	
32	23.6	-	-	-	-	
36	22.5	19.1	-	-	-	
40	21.4	18.2	-	-	-	
48	19.4	16.6	14.7	14.3	-	
56	17.7	15.3	13.8	13.2	-	
64	16.0	14.1	12.9	12.3	10.0	
72	14.6	13.0	12.1	11.5	9.7	
80	13.5	12.2	11.4	10.9	9.2	
88	12.4	11.4	10.8	10.3	8.9	
96	11.2	10.7	10.3	9.9	8.7	
104	10.1	10.0	10.0	9.3	8.4	
112	8.5	9.0	9.0	8.8	8.3	
120	7.4	7.7	5.0	7.9	8.0	
128	6.6	6.7	-	6.7	4.5	
136	5.5	5.8	-	5.9	-	
144	4.9	4.0	-	4.0	-	

 39.4 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
ft	1,000 lbs					
10	29.1	-	-	-	-	-
12	29.1	-	-	-	-	-
14	29.1	-	-	-	-	-
16	29.1	-	-	-	-	-
18	29.1	-	-	-	-	-
20	28.9	24.3	-	-	-	-
24	26.0	22.2	-	-	-	-
28	23.4	20.2	-	-	-	-
32	21.2	18.6	16.8	16.4	-	-
36	19.3	17.3	15.8	15.3	-	-
40	17.7	16.1	14.9	14.4	-	-
48	15.3	14.1	13.3	12.8	11.0	-
56	13.4	12.4	11.9	11.4	10.0	-
64	12.0	11.2	11.0	10.5	9.4	-
72	10.6	10.2	10.2	9.5	8.8	-
80	9.6	9.4	-	9.0	-	-

 *161.1 ft

Operation

HAV-VA

(HA50)

 13,400 lbs		 26.6 ft x 23.6 ft		360°		ASME B30.5	
 164.4 ft							
		26.3 ft					
		0°	0°	0°	20°	40°	
		62.3 ft					
		0°	20°	40°	0°	0°*	
ft		1,000 lbs					
48		9.3	-	-	-	-	
56		9.3	-	-	-	-	
64		8.1	9.3	-	-	-	
72		5.8	7.5	-	-	-	
80		3.9	5.4	6.8	6.5	-	
88		2.4	3.6	5.0	4.7	6.7	
96		-	2.3	3.4	3.3	5.1	
104		-	-	2.1	1.9	3.7	
112		-	-	-	-	2.4	

 148.6 ft							
		26.3 ft					
		0°	0°	0°	20°	40°	
		62.3 ft					
		0°	20°	40°	0°	0°	
ft		1,000 lbs					
40		11.7	-	-	-	-	
48		11.7	-	-	-	-	
56		11.5	11.5	-	-	-	
64		10.0	11.3	-	-	-	
72		7.5	9.1	10.0	9.7	-	
80		5.4	6.9	8.1	7.9	8.6	
88		3.7	5.0	6.2	6.0	7.3	
96		2.5	3.5	4.5	4.4	6.0	
104		-	2.3	3.2	3.0	4.4	
112		-	-	-	-	3.2	

 95.5 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
ft		1,000 lbs				
24	25.4	-	-	-	-	-
28	24.6	-	-	-	-	-
32	23.6	-	-	-	-	-
36	22.5	19.1	-	-	-	-
40	21.4	18.2	-	-	-	-
48	19.4	16.6	14.7	14.3	-	-
56	17.2	15.3	13.8	13.2	-	-
64	14.8	14.1	12.9	12.3	10.0	-
72	12.0	12.6	12.1	11.5	9.7	-
80	9.6	10.5	10.9	10.5	9.2	-
88	7.6	8.4	9.1	9.0	8.8	-
96	6.0	6.7	7.2	7.1	7.9	-
104	4.6	5.2	5.7	5.7	6.4	-
112	3.5	4.1	4.3	4.3	5.0	-
120	2.7	3.1	3.3	3.3	3.7	-
128	1.9	2.1	-	2.3	2.6	-

 39.4 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		62.3 ft				
		0°	20°	40°	0°	0°
ft		1,000 lbs				
10		29.1	-	-	-	-
12		29.1	-	-	-	-
14		29.1	-	-	-	-
16		29.1	-	-	-	-
18		29.1	-	-	-	-
20		28.9	24.3	-	-	-
24		26.0	22.2	-	-	-
28		23.4	20.2	-	-	-
32		21.2	18.6	16.8	16.4	-
36		19.3	17.3	15.8	15.3	-
40		17.7	16.1	14.9	14.4	-
48		15.3	14.1	13.3	12.8	11.0
56		13.4	12.4	11.9	11.4	10.0
64		12.0	11.2	11.0	10.5	9.4
72		10.6	10.2	10.2	9.5	8.8
80		9.6	9.4	-	9.0	-

 *161.1 ft

Operation

HAV-VA

(HA50)

9,500 lbs		26.6 ft x 23.6 ft		360°		ASME B30.5	
164.4 ft							
		26.3 ft					
		0°	0°	0°	20°	40°	
		62.3 ft					
		0°	20°	40°	0°	0°*	
ft		1,000 lbs					
48	9.3	-	-	-	-	-	
56	8.9	-	-	-	-	-	
64	6.8	8.4	-	-	-	-	
72	4.5	6.2	-	-	-	-	
80	2.6	4.2	5.4	5.3	-	-	
88	-	2.6	3.6	3.6	5.8	-	
96	-	-	2.3	2.2	4.2	-	
104	-	-	-	-	2.8	-	

148.6 ft							
		26.3 ft					
		0°	0°	0°	20°	40°	
		62.3 ft					
		0°	20°	40°	0°	0°	
ft		1,000 lbs					
40	11.7	-	-	-	-	-	
48	11.7	-	-	-	-	-	
56	10.9	11.5	-	-	-	-	
64	8.5	10.1	-	-	-	-	
72	6.0	7.6	9.1	8.8	-	-	
80	4.2	5.7	6.8	6.5	8.3	-	
88	2.6	3.9	5.0	4.7	6.6	-	
96	-	2.5	3.5	3.3	4.9	-	
104	-	-	2.2	2.1	3.5	-	

95.5 ft							
		26.3 ft					
		0°	0°	0°	20°	40°	
		62.3 ft					
		0°	20°	40°	0°	0°	
ft		1,000 lbs					
24	25.4	-	-	-	-	-	
28	24.6	-	-	-	-	-	
32	23.6	-	-	-	-	-	
36	22.5	19.1	-	-	-	-	
40	21.4	18.2	-	-	-	-	
48	18.9	16.6	14.7	14.3	-	-	
56	16.4	15.3	13.8	13.2	-	-	
64	13.7	13.7	12.9	12.3	10.0	-	
72	10.6	11.7	11.9	11.5	9.7	-	
80	8.3	9.4	10.2	9.8	9.2	-	
88	6.5	7.4	8.0	7.8	8.5	-	
96	5.0	5.8	6.2	6.2	7.1	-	
104	3.7	4.4	4.8	4.8	5.5	-	
112	2.8	3.2	3.5	3.5	4.1	-	
120	-	2.2	2.5	2.6	3.1	-	
128	-	-	-	-	2.0	-	

39.4 ft							
		26.3 ft					
		0°	0°	0°	20°	40°	
		62.3 ft					
		0°	20°	40°	0°	0°	
ft		1,000 lbs					
10	29.1	-	-	-	-	-	
12	29.1	-	-	-	-	-	
14	29.1	-	-	-	-	-	
16	29.1	-	-	-	-	-	
18	29.1	-	-	-	-	-	
20	28.9	24.3	-	-	-	-	
24	26.0	22.2	-	-	-	-	
28	23.4	20.2	-	-	-	-	
32	21.2	18.6	16.8	16.4	-	-	
36	19.3	17.3	15.8	15.3	-	-	
40	17.7	16.1	14.9	14.4	-	-	
48	15.3	14.1	13.3	12.8	11.0	-	
56	13.4	12.4	11.9	11.4	10.0	-	
64	12.0	11.2	11.0	10.5	9.4	-	
72	10.6	10.2	10.2	9.5	8.8	-	
80	9.4	9.3	-	9.0	-	-	

 *161.1 ft

Operation

HAV-VA

(HA50)

54,000 lbs		26.6 ft x 23.6 ft		360°		ASME B30.5		
164.4 ft				148.6 ft				
		26.3 ft						
		0°	0°	0°	20°	40°		
		32.8 ft						
		0°	20°*	40°*	0°	0°		
ft		1,000 lbs					ft	
56		5.5	-	-	-	-	48	6.8
64		5.5	-	-	-	-	56	6.8
72		5.5	-	-	-	-	64	6.8
80		5.5	5.7	-	-	-	72	6.8
88		5.5	5.7	-	-	-	80	6.8
96		5.5	5.7	-	-	-	88	6.8
104		5.5	5.5	5.1	-	-	96	6.8
112		5.5	5.1	4.8	-	-	104	6.6
120		5.2	4.8	4.5	-	-	112	6.4
128		4.7	4.4	4.1	-	-	120	6.0
136		3.8	4.0	3.8	-	-	128	5.3
144		2.9	3.8	3.5	-	-	136	4.4
152		2.1	3.4	3.3	-	-	144	3.8
160		-	2.6	3.2	-	-	152	3.2
168		-	-	2.7	-	-	160	2.4
176		-	-	1.9	-	-	168	-
							176	-

 95.5 ft						
 	26.3 ft					
	0°	0°	0°	20°	40°	
	32.8 ft					
	0°	20°	40°	0°	0°	
ft	1,000 lbs					
28	13.4	-	-	-	-	
32	13.4	-	-	-	-	
36	13.2	-	-	-	-	
40	12.9	-	-	-	-	
48	12.1	-	-	-	-	
56	11.3	10.0	-	-	-	
64	10.5	9.2	-	8.3	-	
72	9.9	8.6	7.7	7.7	-	
80	9.1	8.1	7.2	7.2	-	
88	8.4	7.5	6.9	6.7	5.6	
96	7.9	7.0	6.5	6.3	5.2	
104	7.3	6.6	6.2	6.0	4.9	
112	6.8	6.2	5.9	5.7	4.8	
120	6.3	5.9	5.7	5.2	4.6	
128	5.9	5.6	5.4	5.0	4.4	
136	5.6	5.2	5.1	4.7	4.4	
144	5.1	5.1	5.1	4.6	4.4	
152	4.8	4.8	2.6	4.4	-	
160	4.5	4.6	-	4.4	-	

 39.4 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		32.8 ft				
		0°	20°	40°	0°	0°
ft		1,000 lbs				
14		17.9	-	-	-	-
16		17.9	-	-	-	-
18		17.8	-	-	-	-
20		17.6	-	-	-	-
24		16.8	-	-	-	-
28		16.0	-	-	-	-
32		15.2	-	-	-	-
36		14.2	-	-	-	-
40		13.3	12.0	-	-	-
48		11.7	10.5	-	9.6	-
56		10.2	9.4	8.7	8.6	-
64		9.0	8.4	7.9	7.7	-
72		8.2	7.5	7.1	7.1	-
80		7.4	6.7	6.5	6.3	5.6
88		6.6	6.2	6.1	5.8	5.2
96		5.9	5.7	5.7	5.2	4.9
104		5.4	5.3	-	4.9	4.7
112		4.8	-	-	-	-

 *161.1 ft **137.5 ft

Operation

HAV-VA

(HA50)

42,500 lbs		26.6 ft x 23.6 ft		360°		ASME B30.5	
164.4 ft				148.6 ft			
		26.3 ft				26.3 ft	
		0°	0°	0°	20°	40°	
		32.8 ft				32.8 ft	
		0°	20°*	40°*	0°	0°	
ft		1,000 lbs					
56		5.5	-	-	-	-	
64		5.5	-	-	-	-	
72		5.5	-	-	-	-	
80		5.5	5.7	-	-	-	
88		5.5	5.7	-	-	-	
96		5.5	5.7	-	-	-	
104		5.5	5.5	5.1	-	-	
112		4.8	5.1	4.8	-	-	
120		3.7	4.8	4.5	-	-	
128		2.8	4.3	4.1	-	-	
136		1.9	3.5	3.8	-	-	
144		-	2.7	3.5	-	-	
152		-	-	2.8	-	-	
160		-	-	2.0	-	-	

148.6 ft				148.6 ft			
		26.3 ft				26.3 ft	
		0°	0°	0°	20°	40°	
		32.8 ft				32.8 ft	
		0°	20°	40°	0°	0°**	
ft		1,000 lbs					
48		6.8	-	-	-	-	
56		6.8	-	-	-	-	
64		6.8	-	-	-	-	
72		6.8	-	-	-	-	
80		6.8	6.8	-	-	-	
88		6.8	6.7	-	6.0	-	
96		6.8	6.5	6.0	5.8	-	
104		6.6	6.2	5.8	5.5	4.9	
112		5.5	5.9	5.7	5.5	4.8	
120		4.9	5.6	5.4	5.2	4.6	
128		4.0	4.8	5.3	5.0	4.4	
136		3.0	3.9	4.8	4.2	4.2	
144		2.4	3.5	3.8	3.3	4.2	
152		-	2.5	3.2	2.5	3.4	
160		-	-	2.4	-	2.4	

 95.5 ft						
 	26.3 ft					
	0°	0°	0°	20°	40°	
	32.8 ft					
	0°	20°	40°	0°	0°	
ft	1,000 lbs					
28	13.4	-	-	-	-	
32	13.4	-	-	-	-	
36	13.2	-	-	-	-	
40	12.9	-	-	-	-	
48	12.1	-	-	-	-	
56	11.3	10.0	-	-	-	
64	10.5	9.2	-	8.3	-	
72	9.9	8.6	7.7	7.7	-	
80	9.1	8.1	7.2	7.2	-	
88	8.4	7.5	6.9	6.7	5.6	
96	7.9	7.0	6.5	6.3	5.2	
104	7.3	6.6	6.2	6.0	4.9	
112	6.8	6.2	5.9	5.7	4.8	
120	6.3	5.9	5.7	5.2	4.6	
128	5.8	5.6	5.4	5.0	4.4	
136	5.4	5.1	5.1	4.7	4.4	
144	4.9	4.9	5.1	4.6	4.4	
152	4.3	4.6	2.6	4.4	-	
160	3.6	3.9	-	4.0	-	

 39.4 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		32.8 ft				
		0°	20°	40°	0°	0°
ft		1,000 lbs				
14		17.9	-	-	-	-
16		17.9	-	-	-	-
18		17.8	-	-	-	-
20		17.6	-	-	-	-
24		16.8	-	-	-	-
28		16.0	-	-	-	-
32		15.2	-	-	-	-
36		14.2	-	-	-	-
40		13.3	12.0	-	-	-
48		11.7	10.5	-	9.6	-
56		10.2	9.4	8.7	8.6	-
64		9.0	8.4	7.9	7.7	-
72		8.2	7.5	7.1	7.1	-
80		7.4	6.7	6.5	6.3	5.6
88		6.6	6.2	6.1	5.8	5.2
96		5.9	5.7	5.7	5.2	4.9
104		5.4	5.3	-	4.9	4.7
112		4.8	-	-	-	-

 *161.1 ft **137.5 ft

Operation

HAV-VA

(HA50)

13,400 lbs		26.6 ft x 23.6 ft		360°		ASME B30.5	
164.4 ft							
		26.3 ft					
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°*	40°*	0°	0°	
ft		1,000 lbs					
56	5.5	-	-	-	-		
64	5.5	-	-	-	-		
72	5.1	-	-	-	-		
80	3.3	5.6	-	-	-		
88	-	4.5	-	-	-		
96	-	3.1	-	-	-		
104	-	1.9	3.7	-	-		
112	-	-	2.6	-	-		

148.6 ft							
		26.3 ft					
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°	40°	0°	0°**	
ft		1,000 lbs					
48	6.8	-	-	-	-		
56	6.8	-	-	-	-		
64	6.8	-	-	-	-		
72	6.6	-	-	-	-		
80	4.8	6.6	-	-	-		
88	3.3	5.6	-	5.6	-		
96	2.1	4.2	5.6	4.4	-		
104	-	2.8	4.6	3.0	4.9		
112	-	-	3.2	-	4.3		
120	-	-	2.2	-	3.1		
128	-	-	-	-	2.0		

95.5 ft							
		26.3 ft					
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°	40°	0°	0°	
ft		1,000 lbs					
28	13.4	-	-	-	-		
32	13.4	-	-	-	-		
36	13.2	-	-	-	-		
40	12.9	-	-	-	-		
48	12.1	-	-	-	-		
56	11.3	10.0	-	-	-		
64	10.5	9.2	-	8.3	-		
72	9.9	8.6	7.7	7.7	-		
80	8.8	8.1	7.2	7.2	-		
88	7.7	7.5	6.9	6.7	5.6		
96	6.4	6.9	6.5	6.3	5.2		
104	5.0	6.2	6.0	5.8	4.9		
112	3.9	5.0	5.7	5.2	4.8		
120	2.9	3.9	4.8	4.2	4.5		
128	2.2	3.0	3.7	3.2	3.7		
136	-	2.2	2.7	2.4	2.7		
144	-	-	1.8	1.6	1.8		

39.4 ft							
		26.3 ft					
		0°	0°	0°	20°	40°	
		32.8 ft					
		0°	20°	40°	0°	0°	
ft		1,000 lbs					
14	17.9	-	-	-	-		
16	17.9	-	-	-	-		
18	17.8	-	-	-	-		
20	17.6	-	-	-	-		
24	16.8	-	-	-	-		
28	16.0	-	-	-	-		
32	15.2	-	-	-	-		
36	14.2	-	-	-	-		
40	13.3	12.0	-	-	-		
48	11.7	10.5	-	9.6	-		
56	10.2	9.4	8.7	8.6	-		
64	9.0	8.4	7.9	7.7	-		
72	8.2	7.5	7.1	7.1	-		
80	7.4	6.7	6.5	6.3	5.6		
88	6.6	6.2	6.1	5.8	5.2		
96	5.9	5.7	5.7	5.2	4.9		
104	5.4	5.3	-	4.9	4.7		
112	4.8	-	-	-	-		

*161.1 ft		**137.5 ft	
-----------	--	------------	--

Operation

HAV-VA

(HA50)

9,500 lbs		26.6 ft x 23.6 ft				
164.4 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		32.8 ft				
		0°	20°*	40°*	0°	0°
		1,000 lbs				
		ft				
56	5.5	-	-	-	-	
64	5.3	-	-	-	-	
72	3.8	-	-	-	-	
80	-	5.2	-	-	-	
88	-	3.4	-	-	-	
96	-	2.1	-	-	-	
104	-	-	2.8	-	-	


360°		ASME B30.5				
148.6 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		32.8 ft				
		0°	20°	40°	0°	0°**
		1,000 lbs				
		ft				
48	6.8	-	-	-	-	
56	6.8	-	-	-	-	
64	6.6	-	-	-	-	
72	5.3	-	-	-	-	
80	3.5	6.3	-	-	-	
88	2.2	4.5	-	4.7	-	
96	-	3.1	5.0	3.3	-	
104	-	1.9	3.7	1.9	4.7	
112	-	-	2.4	-	3.5	
120	-	-	-	-	2.2	

95.5 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		32.8 ft				
		0°	20°	40°	0°	0°
		1,000 lbs				
		ft				
28	13.4	-	-	-	-	
32	13.4	-	-	-	-	
36	13.2	-	-	-	-	
40	12.9	-	-	-	-	
48	12.1	-	-	-	-	
56	11.3	10.0	-	-	-	
64	10.5	9.2	-	8.3	-	
72	9.5	8.6	7.7	7.7	-	
80	8.3	8.1	7.2	7.2	-	
88	6.7	7.3	6.9	6.7	5.6	
96	5.3	6.6	6.5	6.3	5.2	
104	4.1	5.5	6.0	5.6	4.9	
112	3.0	4.3	5.2	4.6	4.8	
120	2.2	3.3	3.9	3.5	4.2	
128	-	2.3	3.0	2.5	3.1	
136	-	-	2.2	1.7	2.0	

39.4 ft						
		26.3 ft				
		0°	0°	0°	20°	40°
		32.8 ft				
		0°	20°	40°	0°	0°
		1,000 lbs				
		ft				
14	17.9	-	-	-	-	
16	17.9	-	-	-	-	
18	17.8	-	-	-	-	
20	17.6	-	-	-	-	
24	16.8	-	-	-	-	
28	16.0	-	-	-	-	
32	15.2	-	-	-	-	
36	14.2	-	-	-	-	
40	13.3	12.0	-	-	-	
48	11.7	10.5	-	9.6	-	
56	10.2	9.4	8.7	8.6	-	
64	9.0	8.4	7.9	7.7	-	
72	8.2	7.5	7.1	7.1	-	
80	7.4	6.7	6.5	6.3	5.6	
88	6.6	6.2	6.1	5.8	5.2	
96	5.9	5.7	5.7	5.2	4.9	
104	5.4	5.3	-	4.9	4.7	
112	4.8	-	-	-	-	

*161.1 ft		**137.5 ft	
-----------	--	------------	--

Notes

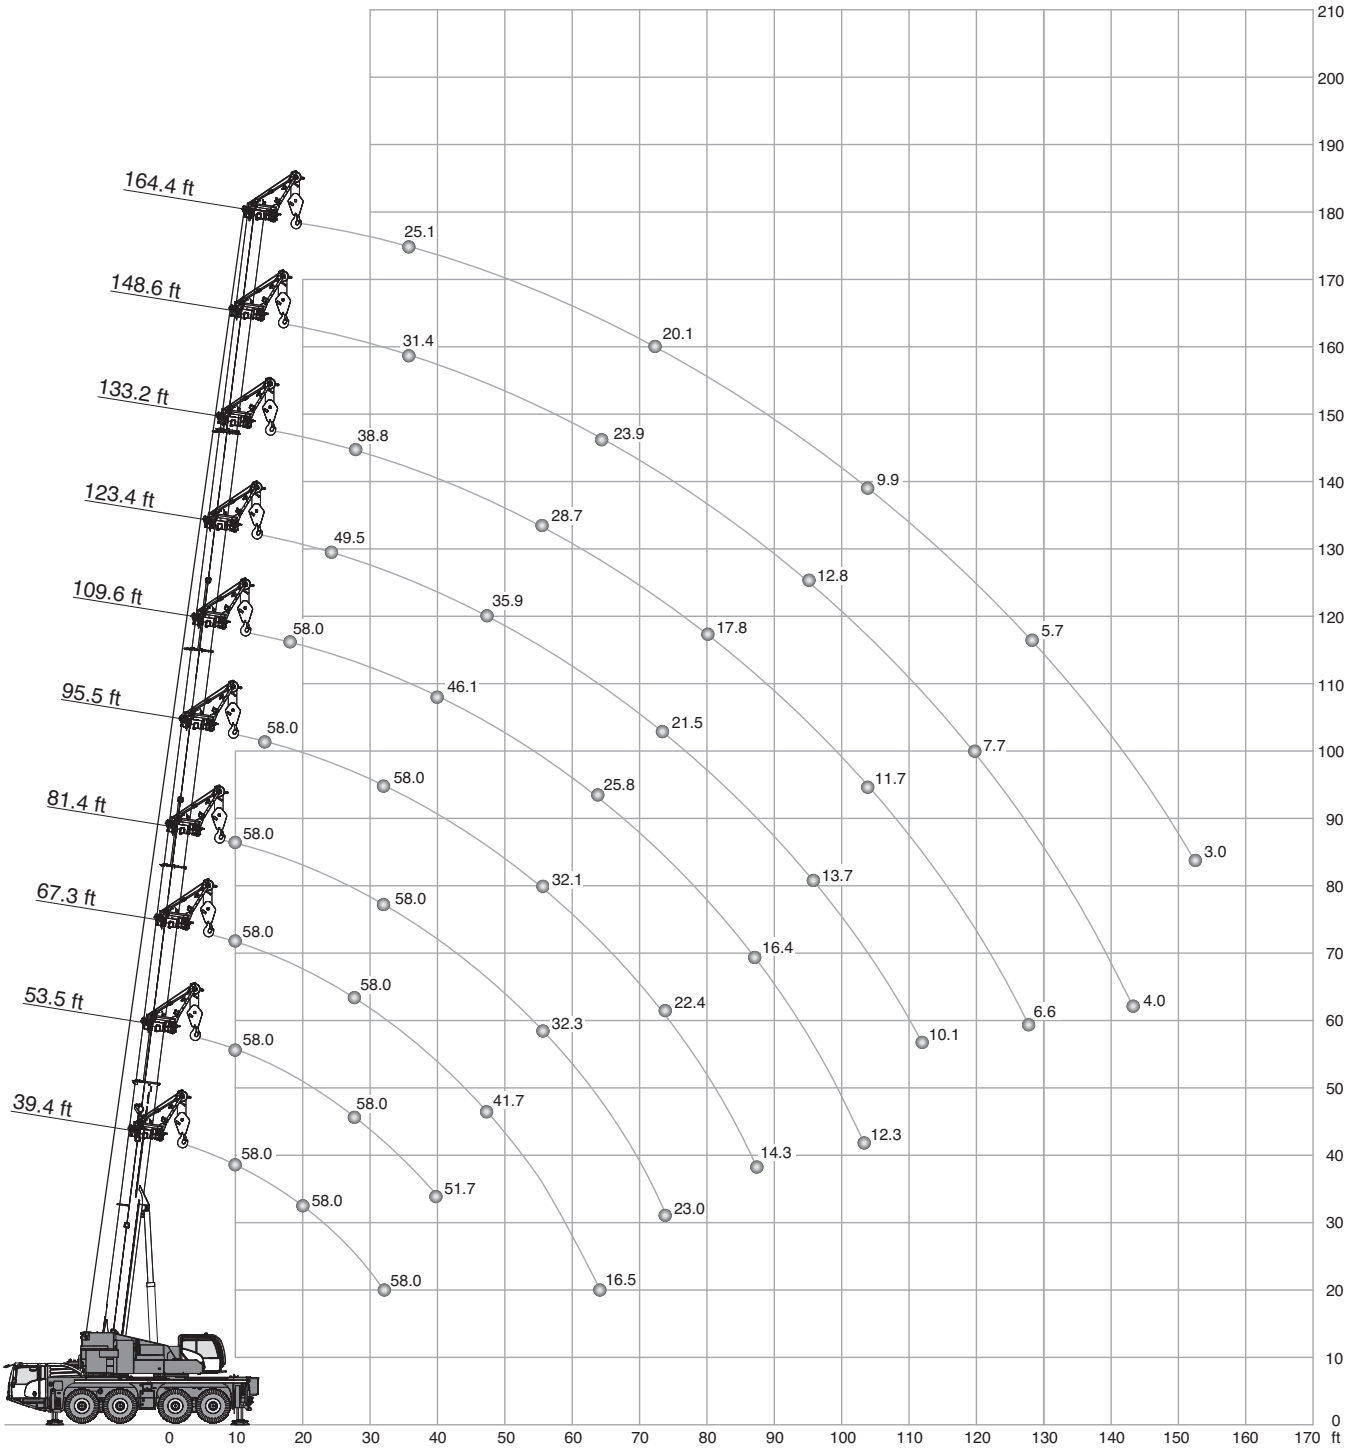

Operation

MS
(HA50)

 54,000 lbs		 26.6 ft x 23.6 ft		360°		ASME B30.5						
		39.4	53.5	67.3	81.4	(ft) 95.5	109.6	123.4	133.2	148.6	164.4	
ft	1,000 lbs											ft
10	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	10
12	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	12
14	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	14
16	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	16
18	58.0	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	18
20	58.0	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	20
24	58.0	58.0	58.0	58.0	58.0	58.0	58.0	49.5	-	-	-	24
28	58.0	58.0	58.0	58.0	58.0	58.0	57.4	48.5	38.8	-	-	28
32	58.0	58.0	58.0	58.0	58.0	58.0	54.2	46.5	38.3	-	-	32
36	-	55.4	56.2	55.9	55.4	50.1	43.9	37.3	31.4	25.1	-	36
40	-	51.7	53.3	52.8	51.7	46.1	41.2	36.1	30.6	25.1	-	40
48	-	-	41.7	41.1	39.8	39.0	35.9	32.3	29.1	24.8	-	48
56	-	-	33.0	32.3	32.1	32.1	30.3	28.7	26.6	24.0	-	56
64	-	-	16.5	26.2	27.1	25.8	25.9	24.4	23.9	22.2	-	64
72	-	-	-	23.0	22.4	22.1	21.5	21.2	20.6	20.1	-	72
80	-	-	-	-	18.9	19.2	18.2	17.8	17.8	17.2	-	80
88	-	-	-	-	14.3	16.4	15.9	15.3	15.1	14.3	-	88
96	-	-	-	-	-	14.1	13.7	13.6	12.8	11.9	-	96
104	-	-	-	-	-	12.3	11.7	11.7	10.8	9.9	-	104
112	-	-	-	-	-	-	10.1	10.1	9.2	8.3	-	112
120	-	-	-	-	-	-	-	8.7	7.7	7.0	-	120
128	-	-	-	-	-	-	-	6.6	6.6	5.7	-	128
136	-	-	-	-	-	-	-	-	5.5	4.7	-	136
144	-	-	-	-	-	-	-	-	4.0	3.8	-	144
152	-	-	-	-	-	-	-	-	-	3.0	-	152

Operation

MS
(HA50)

 42,500 lbs		 26.6 ft x 23.6 ft		360°		ASME B30.5						
		39.4	53.5	67.3	81.4	(ft) 95.5	109.6	123.4	133.2	148.6	164.4	
ft	1,000 lbs											ft
10	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	10
12	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	12
14	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	14
16	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	16
18	58.0	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	18
20	58.0	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	20
24	58.0	58.0	58.0	58.0	58.0	58.0	58.0	49.5	-	-	-	24
28	58.0	58.0	58.0	58.0	58.0	58.0	57.4	48.5	38.8	-	-	28
32	58.0	58.0	58.0	58.0	58.0	58.0	54.2	46.5	38.3	-	-	32
36	-	52.9	53.7	53.5	52.7	49.9	43.9	37.3	31.4	25.1	-	36
40	-	47.7	48.1	47.7	46.2	45.3	41.1	36.1	30.6	25.1	-	40
48	-	-	36.3	35.8	35.7	35.4	33.8	32.0	29.1	24.8	-	48
56	-	-	28.5	28.5	28.9	27.8	27.9	26.8	26.0	24.0	-	56
64	-	-	16.5	23.9	23.3	23.5	22.7	22.1	21.9	21.2	-	64
72	-	-	-	19.7	19.7	19.3	18.8	19.0	18.2	17.3	-	72
80	-	-	-	-	16.8	16.3	15.9	15.9	15.0	14.1	-	80
88	-	-	-	-	13.1	13.8	13.3	13.4	12.4	11.6	-	88
96	-	-	-	-	-	11.8	11.2	11.2	10.3	9.5	-	96
104	-	-	-	-	-	10.1	9.5	9.5	8.6	7.7	-	104
112	-	-	-	-	-	-	8.1	8.1	7.0	6.3	-	112
120	-	-	-	-	-	-	-	6.8	5.9	5.0	-	120
128	-	-	-	-	-	-	-	4.7	4.7	4.0	-	128
136	-	-	-	-	-	-	-	-	3.9	3.0	-	136
144	-	-	-	-	-	-	-	-	2.2	2.2	-	144

Operation

MS

(HA50)

 13,400 lbs		 26.6 ft x 23.6 ft		360°		ASME B30.5						
		39.4	53.5	67.3	81.4	(ft) 95.5	109.6	123.4	133.2	148.6	164.4	
ft	1,000 lbs											ft
10	58.0	58.0	58.0	58.0		-	-	-	-	-	-	10
12	58.0	58.0	58.0	58.0		-	-	-	-	-	-	12
14	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	14
16	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	16
18	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	18
20	58.0	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	20
24	58.0	58.0	58.0	58.0	57.6	56.1	49.4	-	-	-	-	24
28	53.4	54.9	55.3	54.4	52.7	49.6	45.1	38.8	31.0	-	-	28
32	42.9	45.8	46.3	45.7	45.4	42.6	40.5	36.2	30.7	-	-	32
36	-	37.9	38.4	38.8	38.5	37.5	35.7	33.4	29.5	25.1	-	36
40	-	31.0	32.6	32.8	32.8	32.1	30.7	30.1	27.4	24.7	-	40
48	-	-	24.1	24.2	24.3	23.9	23.3	23.0	20.9	19.0	-	48
56	-	-	18.5	18.8	18.8	18.3	17.7	17.7	16.1	14.5	-	56
64	-	-	14.6	14.6	14.8	14.2	13.5	13.7	12.4	10.8	-	64
72	-	-	-	11.7	11.7	11.1	10.4	10.4	9.5	8.0	-	72
80	-	-	-	-	9.4	8.7	8.1	8.3	7.2	6.1	-	80
88	-	-	-	-	7.4	7.0	6.3	6.3	5.4	4.3	-	88
96	-	-	-	-	-	5.3	4.8	4.8	3.8	3.0	-	96
104	-	-	-	-	-	4.1	3.5	3.5	2.6	1.7	-	104
112	-	-	-	-	-	-	2.4	2.6	-	-	-	112

 9,500 lbs		 26.6 ft x 23.6 ft		360°		ASME B30.5						
		39.4	53.5	67.3	81.4	(ft) 95.5	109.6	123.4	133.2	148.6	164.4	
ft	1,000 lbs											ft
10	58.0	58.0	58.0	58.0		-	-	-	-	-	-	10
12	58.0	58.0	58.0	58.0		-	-	-	-	-	-	12
14	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	14
16	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	-	16
18	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	-	18
20	58.0	58.0	58.0	58.0	58.0	58.0	58.0	-	-	-	-	20
24	57.8	58.0	58.0	57.5	56.7	54.9	48.2	38.0	-	-	-	24
28	51.2	53.0	53.4	52.0	50.2	46.9	43.4	38.0	31.0	-	-	28
32	39.7	42.6	43.1	43.5	42.3	40.6	38.3	36.2	30.7	-	-	32
36	-	35.2	35.6	36.9	35.7	35.1	33.0	32.1	28.2	24.3	-	36
40	-	28.9	30.2	30.4	30.4	30.0	28.1	27.4	25.0	22.9	-	40
48	-	-	22.2	22.6	22.7	22.0	21.2	20.9	18.7	16.9	-	48
56	-	-	17.0	17.1	17.2	16.5	16.0	16.0	14.2	12.7	-	56
64	-	-	13.2	13.3	13.3	12.6	12.2	12.2	10.8	9.3	-	64
72	-	-	-	10.4	10.4	9.8	9.1	9.1	8.0	6.7	-	72
80	-	-	-	-	8.1	7.6	7.0	7.0	5.9	4.6	-	80
88	-	-	-	-	6.4	5.8	5.2	5.2	4.3	3.1	-	88
96	-	-	-	-	-	4.4	3.7	3.9	2.8	1.9	-	96
104	-	-	-	-	-	3.2	2.6	2.6	1.7	-	-	104

Notes to Lifting Capacity

Ratings are in compliance with ASME B30.5.


Lifting capacities do not exceed 85 % of tipping load.

Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings.

Consult operation manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and operation manual both supplied with the crane.

TECHNICAL DESCRIPTION

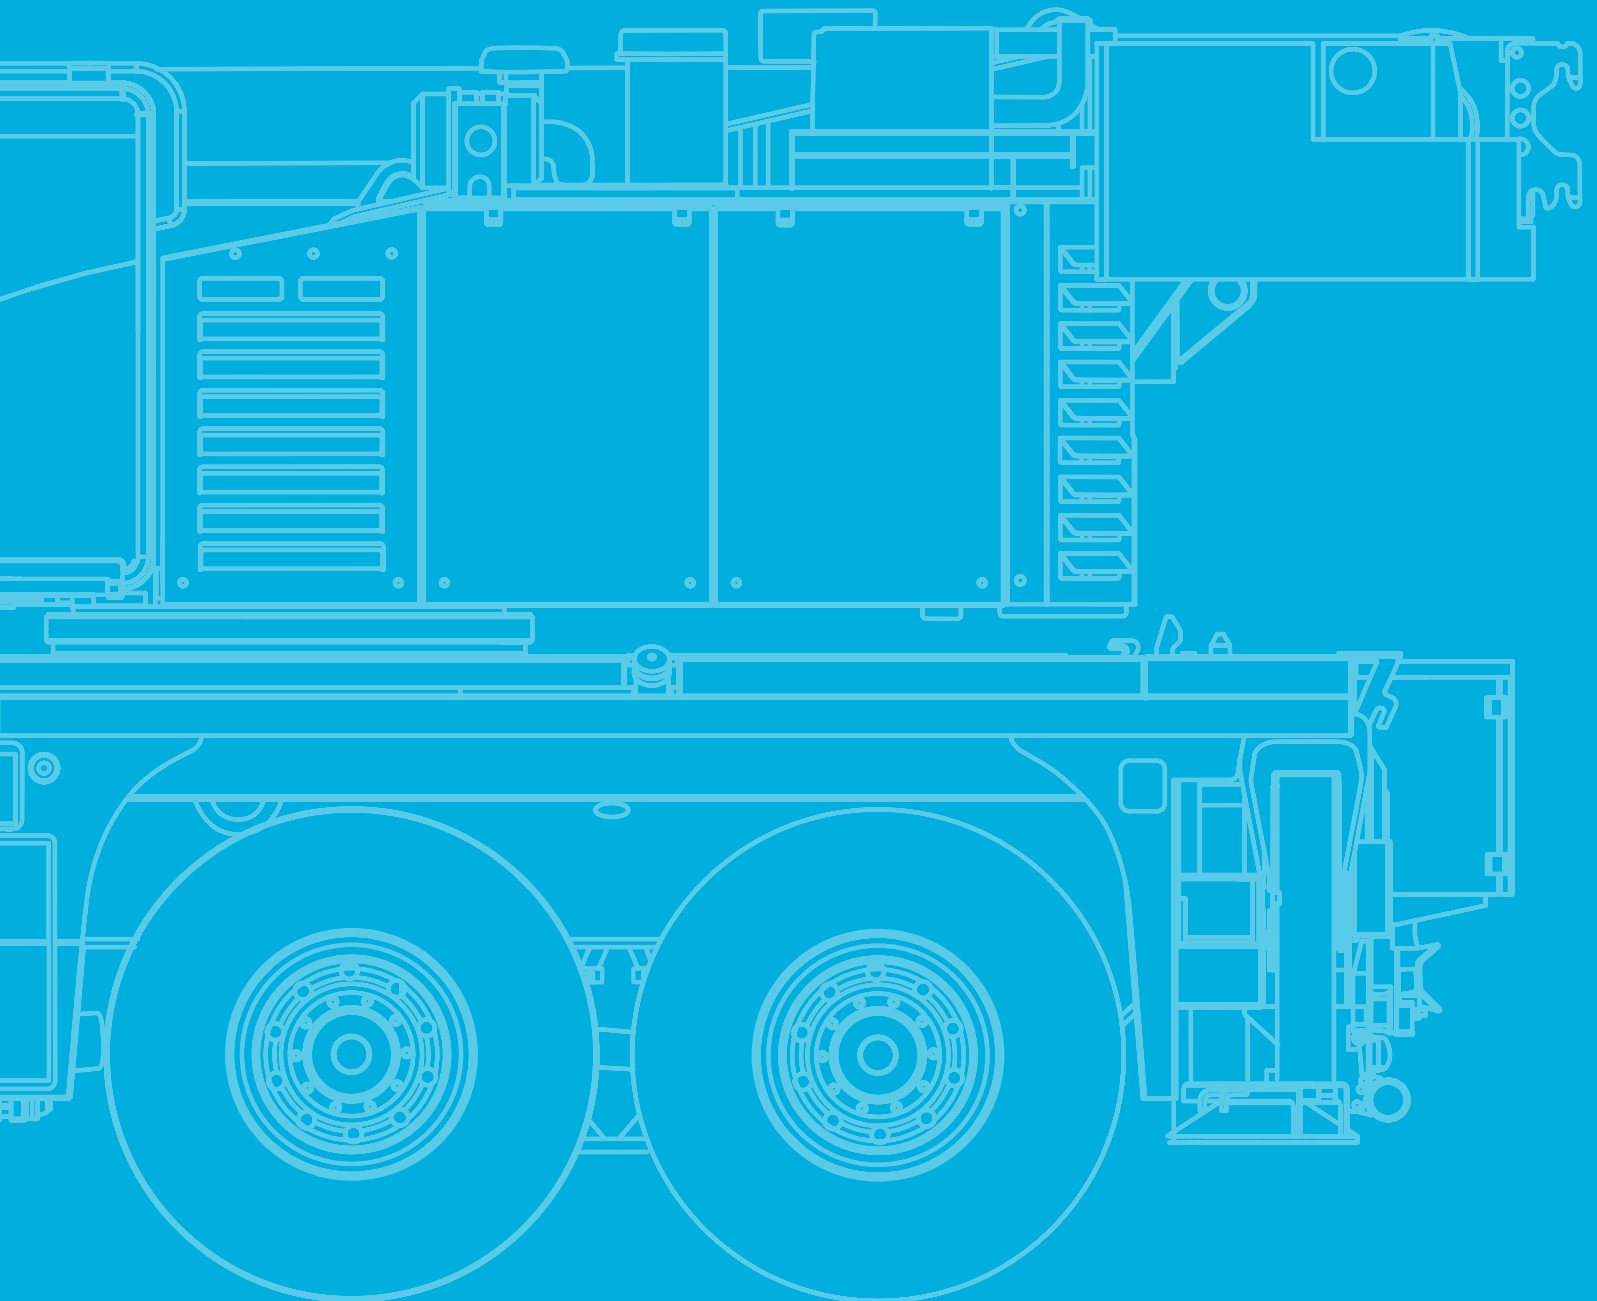

Technical Description

Basic machine

Equipment carrier

Engine 340-5	Mercedes-Benz OM471; Diesel engine; Output 340 kW/1600 1/min (462 HP), torque 2300 Nm/1300 1/min; The engine complies with EU Stage V/Tier 4F; Exhaust system complete stainless steel with SCR catalyzer.
Fuel tank	108 gallons (no RME / biodiesel); 11 gallons AdBlue tank.
Transmission G230-12	Mercedes-Benz G230-12; Automated gearbox; 12 forward speeds and 2 reverse; 2-stage transfer case with switchable longitudinal lock.
Axles 8 x 4 x 8	All 4 axles steered, axles 1 and 4 are driven and equipped with selectable transverse lock.
Suspension	Hydropneumatic suspension with axle load compensation; Hydraulically lockable; Manual or automatic levelling alternatively.
Steering	Dual circuit hydro servocom steering with emergency steering pump; Active rear axle steering (axles 3 and 4) with 6 different steering programs.
Brakes	Pneumatic dual circuit service brake with antilock system, acting on all wheels; Disc brakes; Additional exhaust brake and constant throttle valve; Spring-loaded parking brake; Incl. ABS.
Tires	Tires size 385/95 R25 (14.00R25); Steel rims 9,50-25/1,7“
Cab 2550	Type 8.4 ft; Adjustable driver seat, armrests and pneumatic suspension; Steering wheel height and tilt adjustable; Power door windows; Tinted glass; Radio; Seat heating; Heating engine-dependent; Aircondition.
Drive lights	Including low beam, upper beam, daytime running lights, fog lights and cornering lights.
Central lubrication	Automatic central lubrication system for the lubricating points at the carrier.
Outriggers	H-4-Point design; Vertical and horizontal movement fully hydraulic; Manual or automatic levelling alternatively on both sides of carrier; 4 outrigger bases. 4 outrigger pads 0.92 ft ² with transport position at vertical cylinder.
Outrigger basis monitoring	Individual monitoring of horizontal stroke; Deviation warning in cab.
Outrigger load indicator	The outrigger load is indicated in the operator cab and the outrigger control box.
Electronic immobilizer system	Prevents uncontrolled carrier mobilization; Incl. 5 ignition keys.
Pneumatic tire filling plug	For self-inflating of the wheels.

Equipment superstructure

Engine 129-5	Mercedes-Benz OM934; Diesel engine; Output 129 kW/1800 1/min (175 HP), torque 750 Nm/1200-1600 1/min; The engine complies with EU Stage V/Tier 4F; Exhaust system complete stainless steel with SCR catalyzer.
Fuel tank	53 gallons Diesel (no RME/ Biodiesel); 6.6 gallons AdBlue tank.
Telescopic boom HA60	39.4 - 194.9 ft; Single cylinder telescoping system, automatic telescoping; Attachments for all equipment and extensions; 5 sheaves integrated in boom head for max. capacity of 142,200 lbs.
Boom luffing	Single luffing cylinder with automatic lowering brake valve.
Rotary drive	Single slewing gear unit with spring-loaded multi-disc brake.
H1	Hoist with spring-loaded multi-disc brake; Resolver (hoist rotation indicator); Incl. hoist monitoring.
Counterweight 42,500 lbs	5 pieces ①-⑤ (SPECIAL 4 pieces ①-③+⑦); Automatic rigging system.
Control system	Enabling 4 simultaneous working movements; Electric pilot controls via 2 two-axis joysticks.
Operator aids	IC-1, with integrated load moment indicator acc. EN13000; Colour display; Displaying of current operating conditions, load charts, fault indicator; Signal lights indicating LMI-load; Crane data logger.
IC-1 Plus	Smart crane control system for main boom operation enabling higher lifting capacities especially over outriggers. Enables safe use of the full capacity of the crane even in asymmetric outrigger configurations. Outriggers can be positioned independently. Capacity precalculation for +/- 30° slewing angle and radius area. In-cab lift simulation.
IC-1 Remote	IC-1 Remote, Tadano telematic system.
Working range limiter	Displaying and programmability of the work range limits by IC-1.
Cab 875	Type 2.9 ft; Tilt variable 16°; Fold-out front window; Extendable side, front pedestal; Handrails; Tinted safety glass; Pull-down sun visor; Radio; Seat heating; Heating engine-dependent; Aircondition.
Central lubrication	Automatic central lubrication system for the lubricating points at the superstructure.

Technical Description

Additional equipment

Carrier

Engine 340-3	Mercedes-Benz OM471; Diesel engine; Output 340 kW/1600 1/min (462 HP), torque 2300 Nm/1300 1/min; The engine complies with ECE R96 (equivalent to former European regulation EU Stage IIIA/Tier 3); Exhaust system complete stainless steel incl. spark arrester certificate.
Axles 8 x 6 x 8	All 4 axles steered, axles 1, 3 and 4 are driven and equipped with selectable transverse lock.
Wear-free auxiliary brake	Wear-free auxiliary eddy-current brake at 4th axle.

Superstructure

Engine 129-3	Mercedes-Benz OM934; Diesel engine; Output 129 kW/1800 1/min (175 HP), torque 750 Nm/1200-1600 1/min; The engine complies with ECE R96 (equivalent to former European regulation EU Stage IIIA/Tier 3); Exhaust system complete stainless steel incl. spark arrester certificate.
Telescopic boom HA50	39.4 - 164.4 ft; Single cylinder telescoping system, automatic telescoping; Attachments for all equipment and extensions; 5 sheaves integrated in boom head for max. capacity of 142,200 lbs.
Heavy lift attachment	2 additional sheaves; Dis-/connectable; For total 7 sheaves at boom head; Max. capacity 176,400 lbs.
2. hoist (H2)	Spring-loaded multi-disc brake; Resolver (hoist rotation indicator); Incl. quick couplings and transport rack; Self-rigging.
Additional counterweight 11,500 lbs	2 pieces (Ⓔ); For total 54,000 lbs, 7 pieces (SPECIAL 6 pieces).
Load supervision camera	Camera mounted on main boom head to supervise the hook block and load from above; Incl. boom head light on boom head.

Handling

Remote control	Control of superstructure movements via wireless remote control.
Moving out of crane cab	Control of carrier out of crane cab, enables machine moving when rigged, possible even under load.

Extensions

HAV 32.8 ft	Swing-away jib, manual offset 20° / 40°; 1-sheave head; Incl. transport storage.
HAV 62.3 ft	Double folding swing-away jib, manual offset 20° / 40°; 1-sheave head; Incl. transport storage; Includes HAV 32.8 ft.
HAV-VA 59.0 ft	Variable extension with swing-away jib, manual offset 20° / 40°; 1-sheave head; Incl. transport storage; Includes HAV 32.8 ft.
HAV-VA 88.6 ft	Variable extension with double folding swing-away jib, manual offset 20° / 40°; 1-sheave head; Incl. transport storage; Includes HAV 32.8 ft, HAV 62.3 ft and HAV-VA 59.0 ft.
HAV-HY	Hydraulic, stepless offset 0°-40°, instead of the manual offset; Available for HAV 32.8 ft, HAV 62.3 ft, HAV-VA 59.0 ft and HAV-VA 88.6 ft.
MS (runner)	4.9 ft; Fixed assembly jib, 2-sheaves for max. capacity 58,700 lbs; Incl. transport storage at boom head.

Hook Blocks

Hook block 220,500 lbs, 7-sheaves	Max. capacity 176,400 lbs; 2,320 lbs; Double hook, red with white signal stripes.
Hook block 176,400 lbs, 5-sheaves	Max. capacity 155,700 lbs; 2,360 lbs; Double hook, red with white signal stripes.
Vario hook block 110,200 lbs, 3-sheaves	Max. capacity 101,200 lbs; 660-1,320 lbs; Adjustable ballast and double hook, variable usage as 1- and 3-sheaves hook block, red with white signal stripes.
Hook block 110,200 lbs, 3-sheaves	Max. capacity 101,200 lbs; 1,320 lbs; Double hook, red with white signal stripes.
Hook block 44,100 lbs, 1-sheave	Max. capacity 44,100 lbs; 660 lbs; Single hook, red with white signal stripes.
Hook 17,600 lbs	Max. capacity 15,000 lbs; 375 lbs; Single hook, red.

Further additional equipment on request!

Weight data may deviate from posted values based on road / travel configuration, equipment configuration, and component weight tolerances.

Notes

Notes

tac.sales@tadano.com
www.tadanoamericas.com

Tadano Europe Holdings GmbH

Dinglerstraße 24, 66482 Zweibrücken, Germany
Phone +49 6332 830

Tadano America Corporation

4242 West Greens Road, Houston, TX 77066
Phone: +1 (281) 869-00300 · Fax: +1 (281) 869-0040



Lifting your dreams

